


UNAUTHORIZED USE OF THIS DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1481	A	INITIAL RELEASE	DG	5-08
1505	B	REVISE ISOLATION SPECIFICATION	DG	8-08

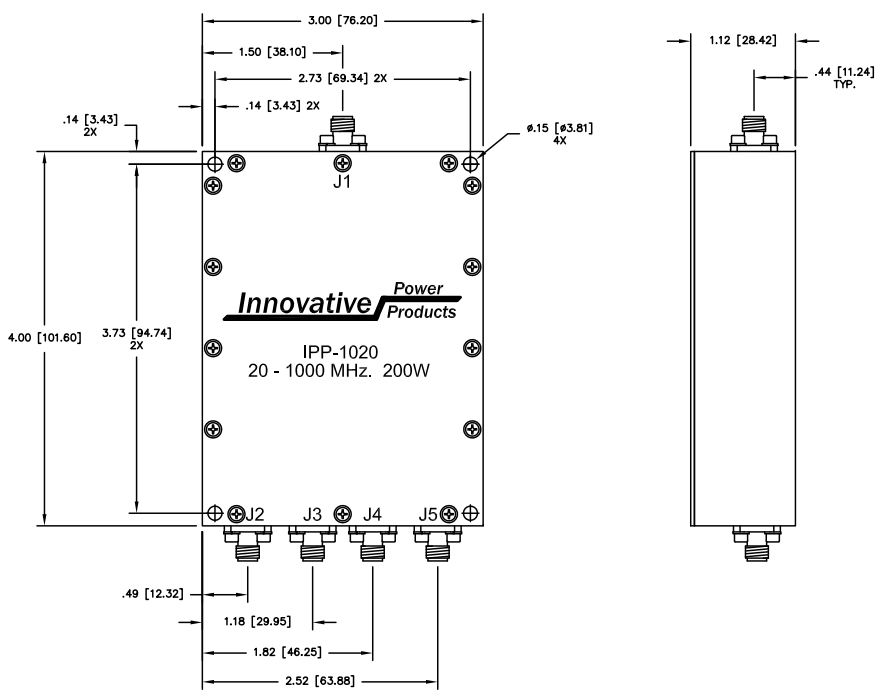

NOTES:  
1. CONNECTORS: J1 - J5 TYPE "SMA" FEMALE.

**ELECTRICAL SPECIFICATIONS**

FREQUENCY: 20 - 1000 MHz.  
 INSERTION LOSS: < 0.75 dB  
 VSWR: < 1.30:1  
 PHASE BALANCE: ±5°  
 POWER: 200 WATT  
 ISOLATION: >12 dB 20-125 MHz  
 >15 dB 125-1000 MHz  
 TEMPERATURE: -55°C TO 85°C

MATERIAL	AL. ALLOY	DWN	DG	DATE	5-08	<b>Innovative Power Products</b>
	6061-T651	ENG	TJD	DATE	5-08	
FINISH	CHEM FILM	MANUF	TP	DATE	5-08	TITLE OUTLINE 4 - WAY 20 - 1000 MHz 200 WATT
	CLEAR IRRIDITE	CAGE CODE: 437R2		SCALE	1:1	
TOLERANCE	.xx ±.02	SHEET	OF	1	1	SIZE B
	.xxx ±.010	P/N		IPP-1020		REV. B
	ANG. ±1/2°					