


UNAUTHORIZED USE OF THIS DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1093	A	INITIAL RELEASE	TJD	4-06
1144	B	REVISED MOUNTING HOLES	TJD	6-06
1468	C	REVISED TOP VIEW	DG	6-08
3127	D	SEE DAR	DG	6-11

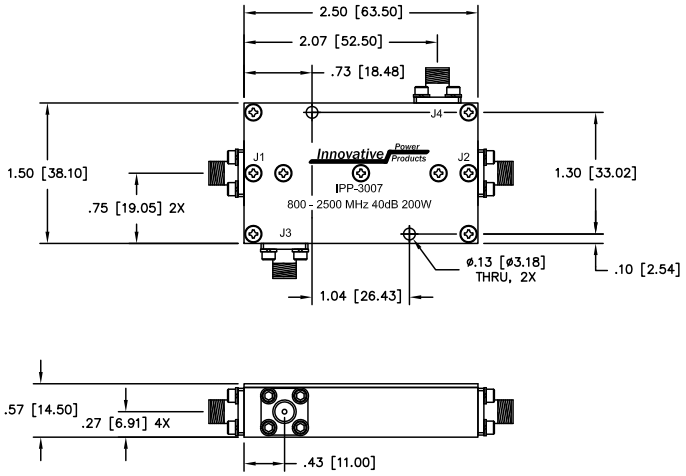

NOTES
1. CONNECTOR TYPE J1 - J4: TYPE SMA

ELECTRICAL SPECIFICATIONS
 FREQUENCY: 800 - 2500 MHz.
 INSERTION LOSS: 0.25 dB MAX.
 VSWR: 1.25:1 MAX.
 COUPLING: 40.0 ±1.0dB
 DIRECTIVITY: >20dB
 COUPLED FLATNESS: ±0.50dB MAX.
 POWER: 200 WATT
 TEMPERATURE: -55°C TO 85°C

MATERIAL	AL. ALLOY	DWN	DG	DATE	4/06		TITLE	DUAL DIRECTIONAL COUPLER	REV.
	6061-T651	ENG	TJD	DATE	4/06				
FINISH	CHEM FILM	MANUF	TP	DATE	4/06				
	CLEAR IRRIDITE	CAGE CODE: 437R2			1:1	B	IPP-3007		
TOLERANCE	.XX ±.02	SHEET	OF	SCALE	1:1				
	.XXX ±.010	1	1						
	ANG. ±1/2°								