

Technical Data
Datasheet 4119, Rev. B


AC/DC Solid State Power Controller Module

Description:

The Solid State Power Controller (SSPC) Module is a microcontroller based Solid State Relay, designed to be used in Aircraft or Navy in 115VAC/150VDC applications. This module has integrated current sensing and over current / over temp protection. The module is equivalent to a DPST relay with a common single side isolated control.

Compliant Documents & Standards:

MIL-STD-167-1 (1) 19 June 1987	Mechanical Vibrations of Shipboard Equipment
MIL-STD-217F Notice 2 28 Feb 1995	Reliability Prediction of Electronic Equipment
P4855-1A January 1989	Navy Power Supply Design and Reliability Guidelines (NAVMAT)

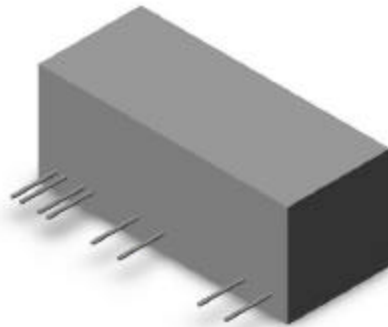

Patent Pending

Module Features:

- Epoxy Shell Construction
- Solid State Reliability; Low Weight (60 gms) - High Power Density
- Similar footprint as a mechanical relay: 2.8"x1.15"x1.15"
- Single-in-line pins to ease pcb assembly

Electrical Features:

- 115VAC Input: Current rating of 8A with very low drop; 180mV typ
- Current rating upto 12A with drop @ 280mV
- Advanced TRUE I^2t algorithm to compensate for different current waveforms
- 2-Pole operation: 500V DC isolation between poles
- High control circuit isolation: 1500V DC to either pole
- Cross-trip feature: Fault on one pole trips the other within 10 μ sec
- Very low control current: 14 mA @ 24V typ
- True I^2t Protection from 11A to 90A
- Instant Trip Protection (3 μ sec typ) for loads over 100A
- High Overload Capability up to 250A; Repetitive Fault handling capability
- Built-in Transient Voltage Suppressor to handle Short Circuit Turn-Off Spikes
- Over-temperature Protection: 75 °C Amb typ
- Internally generated isolated supply to drive the switch
- Opto Isolated Control Signal input and Status output
- Soft Turn-on to reduce EMC issues
- Module Reset with a Low Level Signal; Trip Reset Circuit is Trip-Free
- Built-in Hysteresis and Noise Filtering to avoid nuisance Turn-ON/OFF

Technical Data
Datasheet 4119, Rev. B

Electrical Characteristics

Control & Status	
Vcc	24V DC Nominal 20V to 36V DC
Control Vcc Current (from +24V)	14 mA typ 20 mA max
Alarm Out Signal	ON: High (internal pull-up to +24V); Output can source upto 5 mA OFF: Logic Low Output shall remain below 2V sink upto 5 mA
Control signal	ON: Logic Low (internal pull-up to +24V) Turns ON when input is pulled below 4V Input current @ Control pin < 0.5 mA OFF: Open Turns OFF when input is float or pulled above 12V
Reset	Thro cycling of Control signal Thro cycling of Vcc

Power	
Input Voltage	0 to 170V DC 0 to 120V AC 10 Hz to 440 Hz
Power Dissipation	< 2.5W @ 8A @ 70°C Amb per pole
Current (Pole #1 and Pole #2)	8A Continuous 250A for 2 µsec
Max Voltage Drop (Each Pole)	180 mV typ @ 8A, T _A = 25 °C 260 mV max T _A = -40 °C ~ 70 °C
Turn ON time (measured from Input Signal)	3 msec max Both Poles turn-on together
Turn OFF time (measured from Input Signal)	50 µsec max Both Poles turn-off together
Time Difference at Turn-on between Poles	20 µsec max
Time Difference at Turn-off between Poles	20 µsec max
Min Trip current (Each Pole)	8.8A DC 8.8A AC RMS
Trip time	
11A	460 msec ~ 860 msec
20A	140 msec ~ 260msec
30A	62 msec ~ 115 msec
50A	22 msec ~ 42 msec
90A	7 msec ~ 13 msec
100A and above	Less than 3 µsec
Repetitive Fault current Rating	250A
Output Rise Time (turn ON)	5 µsec typ
Output Fall Time under normal turn-off	300 nsec typ
Output Fall Time under Fault	300 nsec typ
Min Load Requirement	Nil

Technical Data
Datasheet 4119, Rev. B



Protection	
Short Circuit Protection	Upto 250A
Voltage Spikes	Built-in Transient Voltage Suppressor to handle short-circuit turn-off spike
OTP (Over Temperature Protection) threshold	typ. 75 °C, min. 70 °C, max 80 °C
OTP response time	typ. 5 sec

Physical Characteristics

Temperature	
Operating Temperature	T _A = -40°C to +70°C
Storage Temperature	T _A = -55°C to +85°C

Environmental	
Altitude	Upto 30,000 ft Can be installed in an unpressurized area
Case Dimensions	2.8"L x 1.15"W x 1.15"H
Operating Orientation	Any
Weight	60 grams typ
MTBF (Estimate: MIL STD 217F)	100,000 hrs at 25°C Full load

Mechanical Dimensions (in Inches)

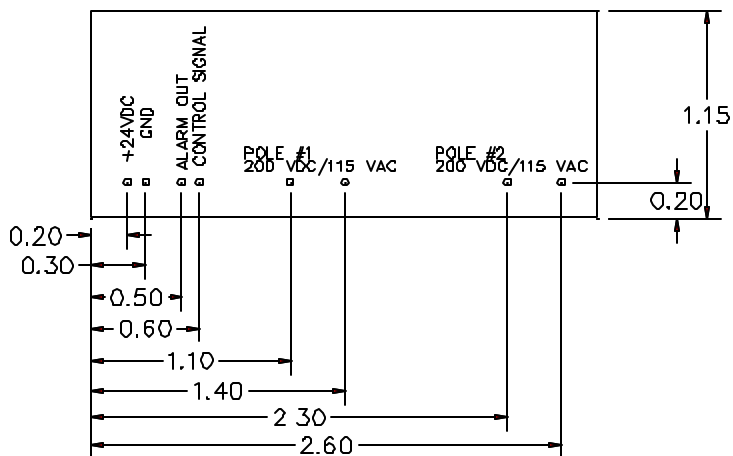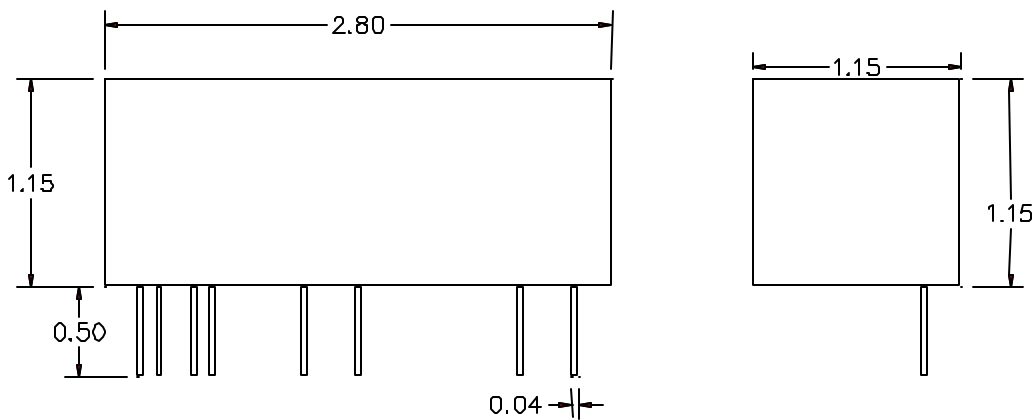

TECHNICAL DATA

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.