

2-WAY POWER DIVIDER

SURFACE MOUNT MODEL: SPD-95-215

WIDE BANDWIDTH


950 - 2150 MHz

FEATURES:

- ▶ Excellent Performance
- ▶ Small Size, Surface Mount
- ▶ Moderate Power
- ▶ Lead Free RoHS Compliant

APPLICATIONS:

- ▶ Signal Splitting & Low Power Combining

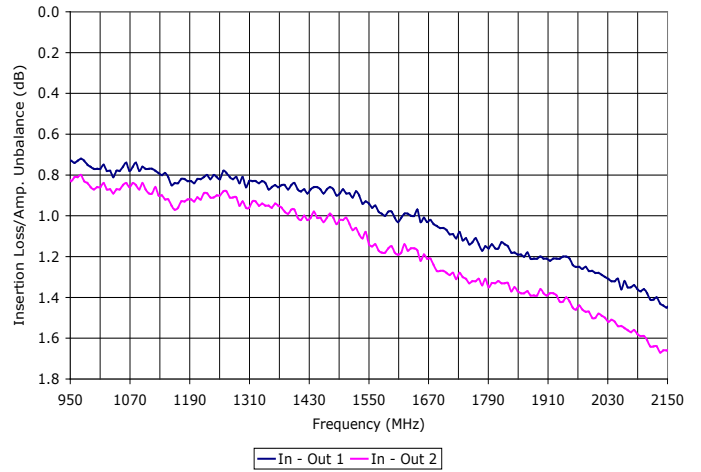

SPECIFICATIONS (Rev. A 11/06/08)

Frequency	950 - 2150 MHz	
Insertion Loss (dB) *	Typ. 1.7	Max. 2.2
Isolation (dB)	Typ. 18	Min. 15
Phase Unbalance	Typ. 3°	Max. 6°
Amplitude Unbalance (dB)	Typ. 0.2	Max. 0.5
Input Power **	1 Watt (Max.)	
VSWR	Input 1.25:1 (Typ.)	Output 1.20:1 (Typ.)
Impedance	50 Ohms (Nom.)	
Operating Temperature Range	-40 to +85 °C	
* Above 3.0 dB theoretical split loss.		
** Handling power applies to splitter mode and assumes ideal 50 Ohms impedance matching on all ports.		

Package # 133

LAYOUT FOR PRINTED CIRCUIT DESIGN.

Port Configuration		
Input	Output	Ground
3	1,2	All Others



2-WAY POWER DIVIDER

SURFACE MOUNT MODEL: SPD-95-215

WIDE BANDWIDTH

950 - 2150 MHz

Data @ 25°C

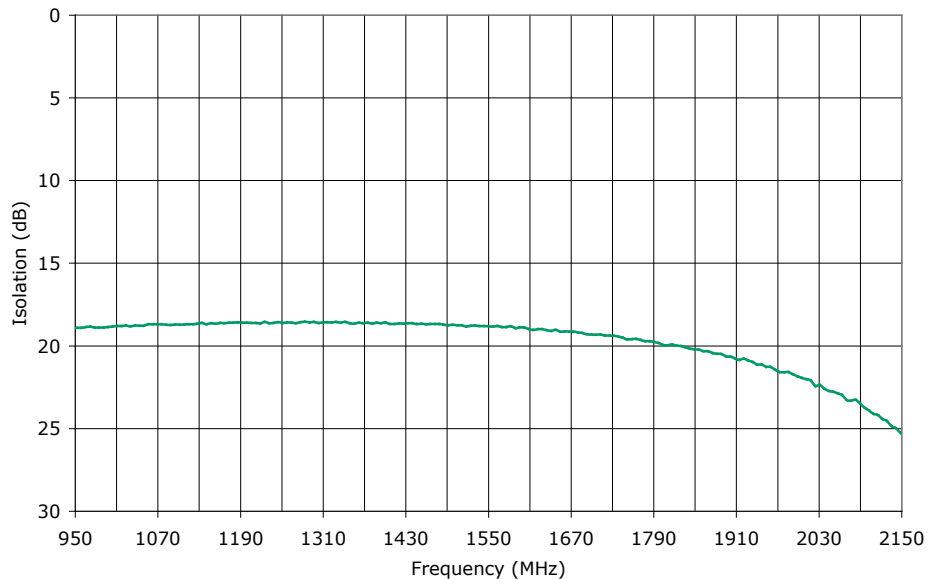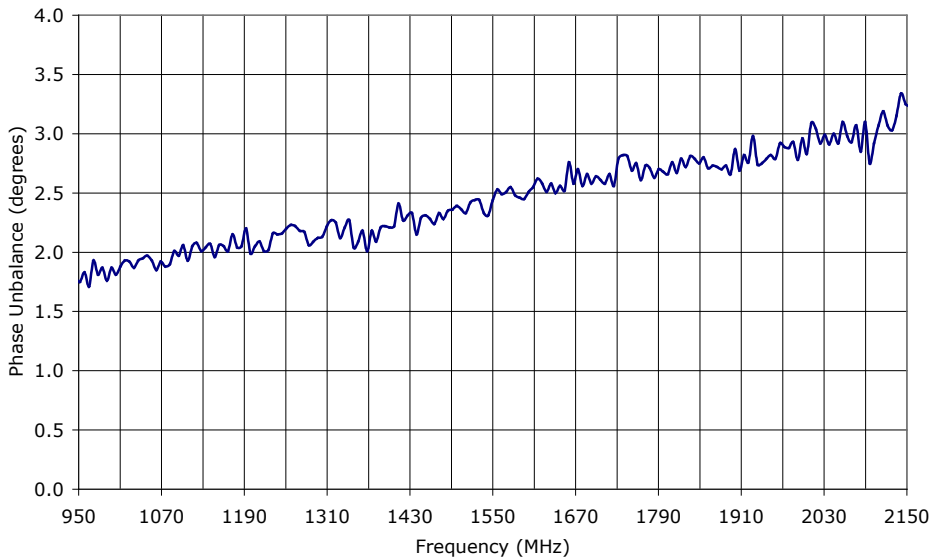

PERFORMANCE PLOTS

Copyright © 2008 Synergy Microwave Corporation

201 McLean Boulevard • Paterson, New Jersey 07504 • Tel: (973) 881-8800 • Fax: (973) 881-8361
E-Mail: sales@synergymicrowave.com • World Wide Web: <http://www.synergymicrowave.com>





2-WAY POWER DIVIDER

SURFACE MOUNT MODEL: SPD-95-215

WIDE BANDWIDTH

950 - 2150 MHz

Data @ 25°C

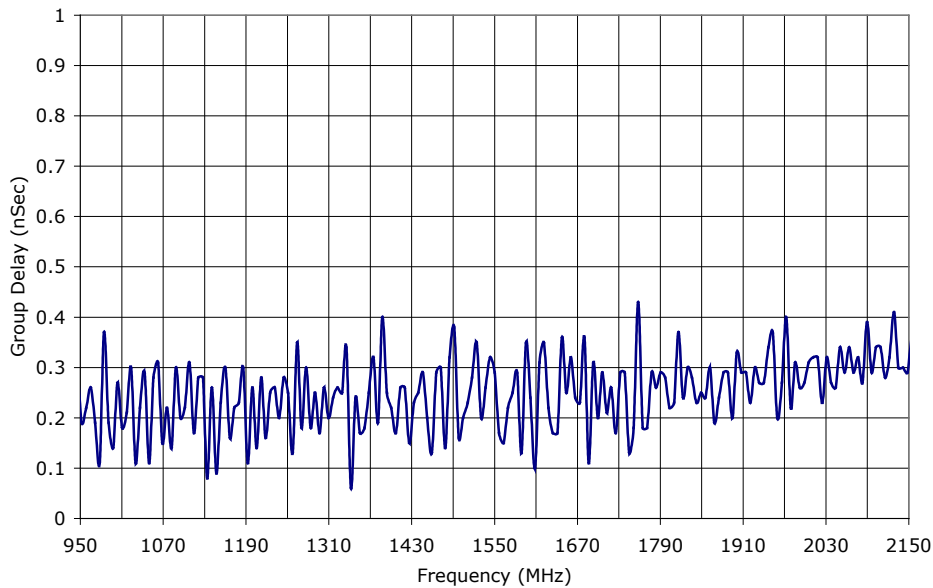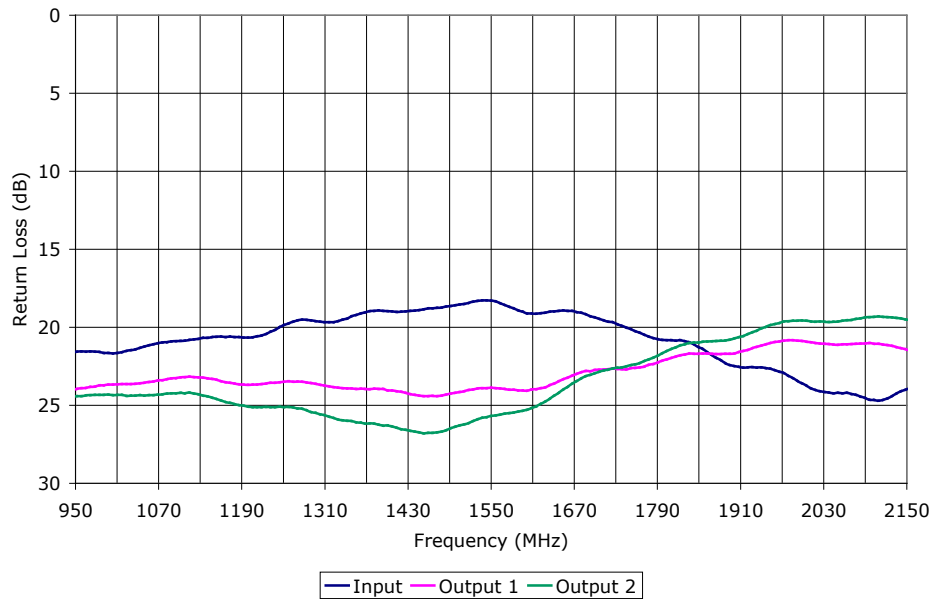

PERFORMANCE PLOTS

Copyright © 2008 Synergy Microwave Corporation

201 McLean Boulevard • Paterson, New Jersey 07504 • Tel: (973) 881-8800 • Fax: (973) 881-8361
E-Mail: sales@synergymwave.com • World Wide Web: <http://www.synergymwave.com>

