

Features:

- 10 Watts
- Lowest Cost
- True Surface Mount
- Alumina Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested



Surface Mount Termination 10 Watts, 50Ω

Description

The RFP-100200A25Z50 is high performance Alumina surface mount termination intended as a lower cost alternative to Aluminum Nitride (AIN) and Beryllium Oxide (BeO). The termination is well suited to all cellular frequency bands such as; AMPS, GSM, DCS, PCS, PHS and UMTS. The high power handling makes the part ideal for terminating 90 degree hybrid, directional couplers, and for use in isolators.

General Specifications

Resistive Element Thick film

SubstrateAlumina CeramicTerminal FinishThick film Silver

Operating Temperature -55 to +125°C (see chart)


Tolerance is ± 0.010 ", unless otherwise specified. Designed to meet of exceed applicable portions of MIL-E-5400. All dimensions in inches.

Electrical Specifications

Resistance Value: $50 \text{ ohms}, \pm 2\%$ Power:10 WattsFrequency Range:DC - 3.0 GHzV.S.W.R.:<1.25:1

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change without notice**

Outline Drawing

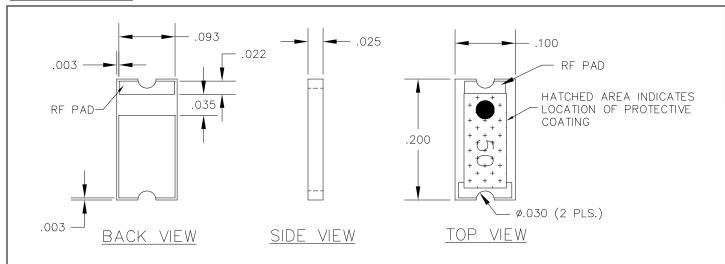

100200A25Z50 (097) Rev C





Available on Tape and Reel For Pick and Place Manufacturing. USA/Canada: (315) 432-8909 Toll Free: (800) 544-2414 Europe: +44 2392-232392


Model RFP-100200A25Z50




Typical Performance:






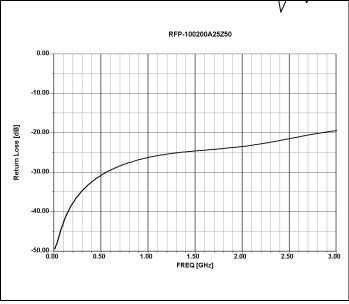


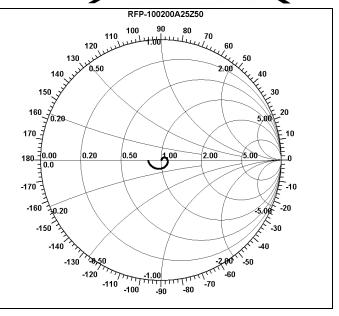


Power De-rating:

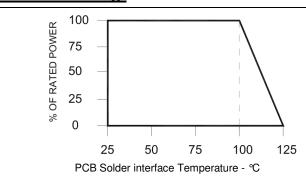

Tape & Reel:

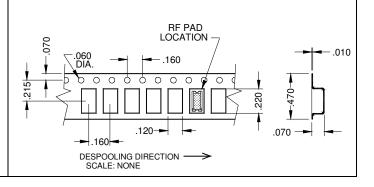

Mounting Footprint and Procedure:

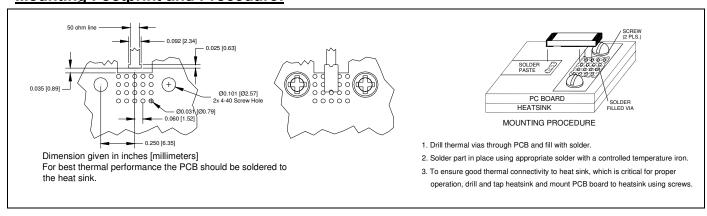

100200A25Z50 (097) Rev C

USA/Canada: Toll Free: Europe: (315) 432-8909 (800) 544-2414 +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.

