

# FDT Series Elements with Lead Attachment

Piezo Film Technology  
Flexible Leads  
High Strain Output  
Film Thickness Options  
Lamination Options  
Solderable Connection Pins

The “F” in **FDT Series** stands for “Flexible Leads.” These are rectangle elements of Piezo film with silver ink screen printed electrodes. Rather than making the lead attachment near the sensor, the Piezo polymer tail extends from the active sensor area as flex circuit material with offset traces. This gives a very flat, flexible lead with a connector at the end.

The FDT elements are available in a variety of different sizes and thicknesses. They are available without a laminate (FDT), with a laminated (0.005” mylar) on ones side (FLDT) or with tape release layer adhesive (FDT with adh) in the sensor area.




## FEATURES

- Thin piezo film sensor
- Flexible leads give flat profile to the sensor
- Dynamic strain sensing with a high output
- Typical interface to a 1 or 10 MΩ input impedance
- Output Voltage dependant on Force applied 10 mV to 100V

## APPLICATIONS

- Sensing Direct Contact Force
- Recording Time of an Event
- Counting Number of Impact Events
- Measuring Impact Related Events
- Sensing Vibration using Cantilevered Beam
- Wakeup Switch
- Motion Detection

## dimensions

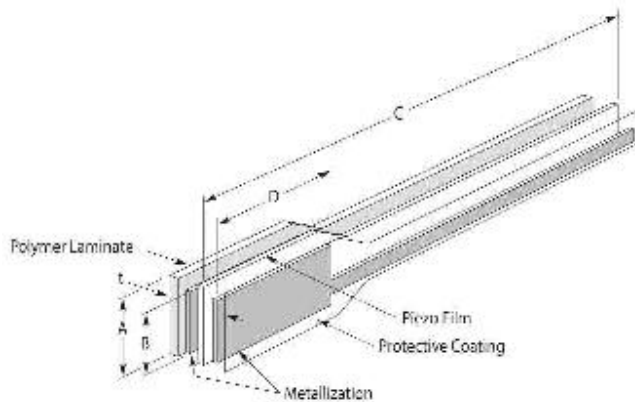

DIMENSION in INCHES (mm)

| Model Number       | Part Number | Film thickness | A Film    | B Electrode | C Film     | D Electrode | t (µm) | Cap (nF) |
|--------------------|-------------|----------------|-----------|-------------|------------|-------------|--------|----------|
| FDT1-028K          | 1-1002785-1 | 28 µm          | .620 (16) | .485 (12)   | 9.25 [235] | 1.16 (30)   | 55     | 1.37     |
| FDT1-052K          | 2-1002785-1 | 52 µm          | .620 (16) | .485 (12)   | 9.25 [235] | 1.16 (30)   | 85     | .740     |
| FLDT1-028K         | 1-1002786-1 | 28 µm          | .620 (16) | .485 (12)   | 9.25 [235] | 1.16 (30)   | 205    | 1.37     |
| FLDT1-052K         | 2-1002786-1 | 52 µm          | .620 (16) | .485 (12)   | 9.25 [235] | 1.16 (30)   | 230    | .740     |
| FLDT1-028K w/adh-F | 1001777     | 28 µm          | .650 (17) | .485 (12)   | 5.51 [140] | 1.18 (30)   | 125    | 1.37     |

The connector pins on the FDT sensors can be directly soldered to a PCB with a reasonable level of care. This component cannot withstand high temperatures (>80°C) and therefore soldering of the pins to a PCB must be done quickly. A heat sink clamped to the interface area between the film and the crimps will take the heat away from the film. Pre-tin the pins and then quickly solder them to the board. Do not allow the soldering iron to touch the film and do not use a dwell time of over 5 seconds on the pins. Low temperature solder can also be used.

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

## ordering information

### North America

Measurement Specialties, Inc.  
1000 Lucas Way  
Hampton, VA 23666  
Sales and Customer Service  
Tel: +1-800-745-8008 or  
+1-757-766-1500  
Fax: +1-757-766-4297  
Technical Support  
Email: [piezo@meas-spec.com](mailto:piezo@meas-spec.com)

### Europe

MEAS Deutschland GmbH  
Hauert 13  
44227 Dortmund  
Germany  
Sales and Customer Service  
Tel: +49 (0)231 9740 21  
Technical Support  
Tel: +49 (0)6074 862822  
Email: [piezoeurope@meas-spec.com](mailto:piezoeurope@meas-spec.com)

### Asia

Measurement Specialties (China), Ltd.  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District  
Shenzhen, China 518107  
Sales and Customer Service  
Tel: +86 755 3330 5088  
Technical Support  
Email: [piezo@meas-spec.com](mailto:piezo@meas-spec.com)