



**15-pin HD female / 15-pin HD male**

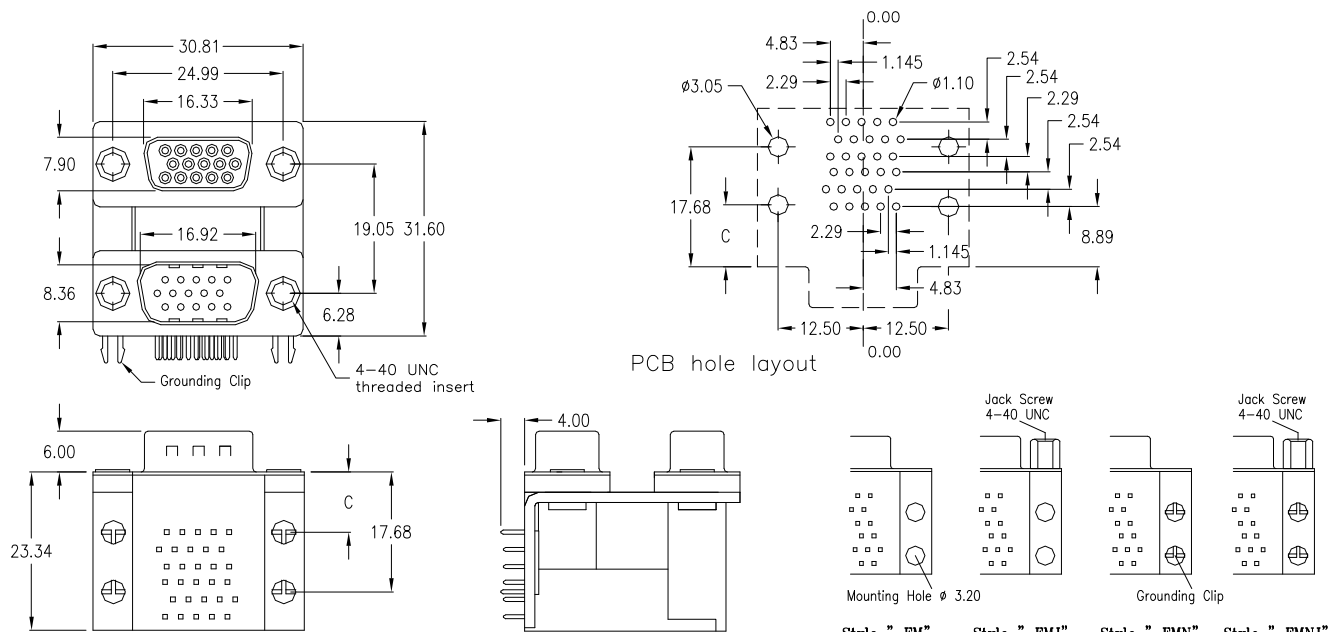

without grounding clips, just 4 mounting holes	without grounding clips, just 4 mounting holes; 4 jack screws 4-40 UNC mounted	with 4 grounding clips (as above drawing)	with 4 grounding clips; 4 jack screws 4-40 UNC mounted	Distance Dimensions (Standard : "4")
SDD-H15H15-2-95-FM	SDD-H15H15-2-95-FMJ	SDD-H15H15-2-95-FMN	SDD-H15H15-2-95-FMNJ	„C“ = 8.89
SDD-H15H15-4-95-FM	SDD-H15H15-4-95-FMJ	SDD-H15H15-4-95-FMN	SDD-H15H15-4-95-FMNJ	„C“ = 9.50

**15-pin HD female / 15-pin HD female**

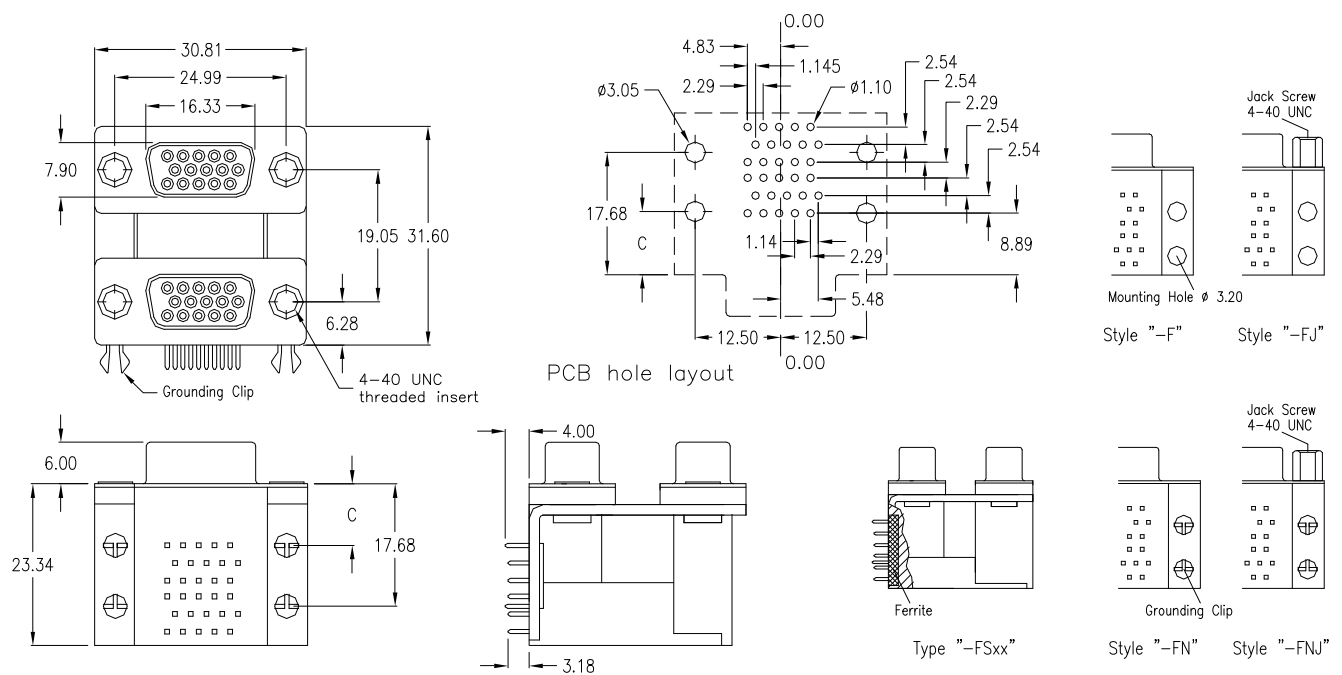

without grounding clips just 4 mounting holes	without grounding clips, just 4 mounting holes; 4 jack screws 4-40 UNC mounted	with 4 grounding clips (as above drawing)	with 4 grounding clips; 4 jack screws 4-40 UNC mounted	Distance Dimensions (Standard : "4")
SDD-H15H15-2-95-F	SDD-H15H15-2-95-FJ	SDD-H15H15-2-95-FN	SDD-H15H15-2-95-FNJ	„C“ = 8.89
SDD-H15H15-4-95-F	SDD-H15H15-4-95-FJ	SDD-H15H15-4-95-FN	SDD-H15H15-4-95-FNJ	„C“ = 9.50
if with Ferrite Filter: -FS	if with Ferrite Filter: -FSJ	if with Ferrite Filter: -FSN	if with Ferrite Filter: -FSNJ	