


AXXXXD-2W
1KV ISOLATED,
2W UNREGULATED DUAL OUTPUT,
DIP 14 PACKAGE,
MTBF>1M HOURS
Available Inputs:
5, 12, 15 and 24 VDC
Available Outputs:
(+/-) 3.3, 5, 9, 12, 15 and 18 VDC

Other specifications please enquire Sunyuan Technology.


Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range	+/- 10 %
Filter	Capacitors
Isolation Specifications	
Rated voltage	1000 VDC
Leakage current	1 mA
Resistance	10 ⁹ Ohm
Capacitance	60 pF type.

Output Specifications

Voltage accuracy	+/- 5 %, max.
Ripple and noise (at 20 MHz BW)	75 mV p-p, max.
Short circuit protection	Momentary
Line voltage regulation	+/- 1,2 % / 1,0 % of Vin
Load voltage regulation	+/- 8 %, load = 20 ~ 100 %
Temperature coefficient	+/- 0,02 % / °C

General Specifications

Efficiency	70 % to 85 %
Switching frequency	125 KHz, type.

Environmental Specifications

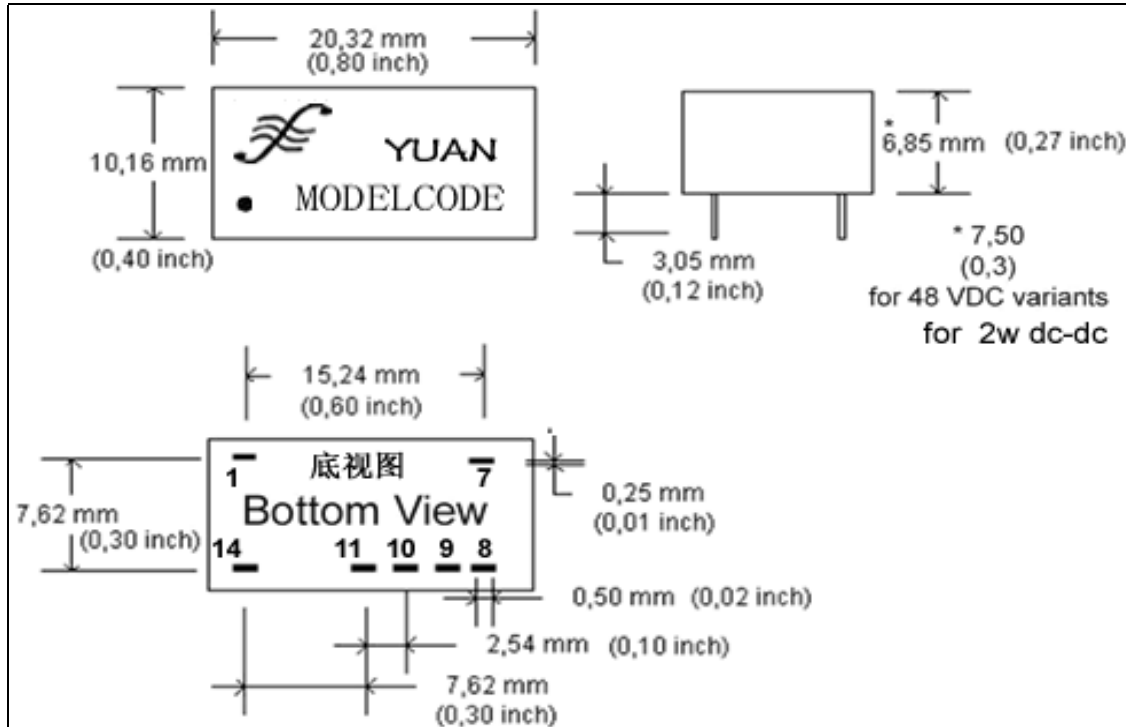
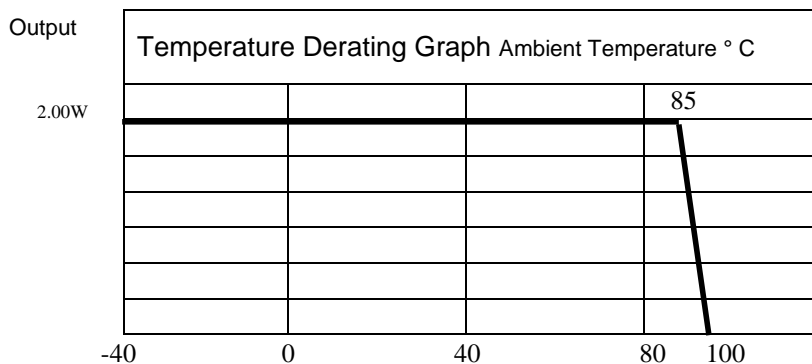
Operating temperature (ambient)	- 40° C to + 85° C
Storage temperature	- 55 °C to + 125 °C
Derating	See graph
Humidity	Up to 90 %, non condensing
Cooling	Free air convection

Physical Characteristics

Dimensions DIP	20.40 x7.50 x 10.00 mm 0,78 x 0,28 x 0,38 inches
Weight	3 g
Case material	Non conductive black plastic

Examples of Part Numbers

SUNYUAN PARTNO	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYPE.)
A0505D-2W	5	28	555	+/-5	+/- 200	72
A1205D-2W	12	22	225	+/-5	+/- 200	74
A1212D-2W	12	20	208	+/-12	+/- 84	80
A1215D-2W	12	20	208	+/-15	+/- 67	80
A2405D-2W	24	11	111	+/-5	+/-200	75
A2412D-2W	24	8	102	+/-12	+/- 84	81
A2415D-2W	24	8	102	+/-15	+/-67	82

AXXXXD-2W
1KV ISOLATED,
2W UNREGULATED DUAL OUTPUT,
DIP 14 PACKAGE,
MTBF>1M HOURS
Dimensions

Derating Graph and Pinning


Pin	Connection		
1	-	Vin	Input
2~6			Omitted
7			NC
8	0	0V	Common
9	+	Vout	Output
10			Omitted
11	-	Vout	Output
12,13			Omitted
14	+	Vin	Input

- Specification may be changed without any notification.

- © Copyright 2004, Sunyuan Technology. All Right Reserved.

TEL : 86-755-83100080 13903024062 FAX : 86-755-83116652

 Website: www.sun-yuan.com E-mail: sy@sun-yuan.com

 Website: www.sunyuan.com.cn E-mail: szsy@sunyuan.com.cn
