

Type: CLS74


### Product Description

- 8.3 × 8.3mm Max.(L × W), 5.2mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.


### Feature

- Magnetically shielded construction.
- Ideally used in power supply of DSC、Note PC and DVC.
- RoHS Compliance


### Dimensions (mm)

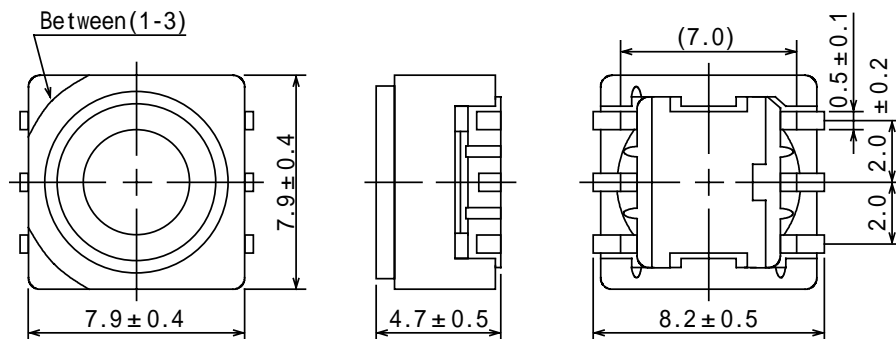

### Schematics (Bottom)



### Land Pattern (mm)

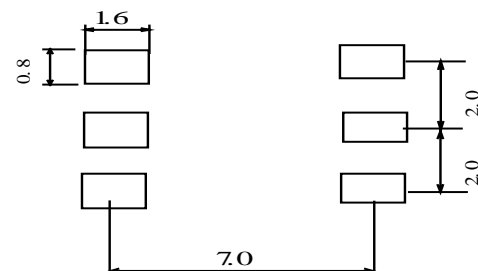

### Specification

Sample No.	Inductance (1-3) 1kHz/1V	D.C.R. (1-3) @20	Rated current (1-3)
6322-T019	250 $\mu$ H $\pm$ 35%	2.0 Max.	160mA

Rated current: The D.C. current at which the inductance decreases to 90% of it's initial value or When  $t=40$  , whichever is lower( $T_a=20$  ).