


30 Amp Ultra Fast Recovery Rectifier UF3060 — UF3080

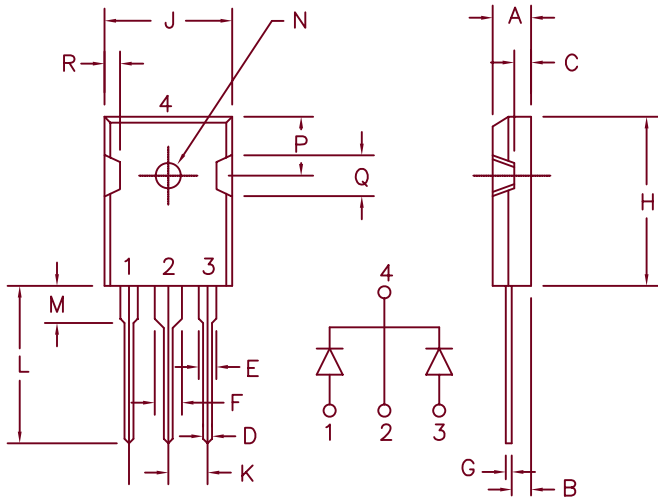

Similar to TO-247AD

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog
Number

UF3060
UF3070
UF3080

Repetitive Peak
Reverse Voltage

600V
700V
800V

Transient Peak
Reverse Voltage

600V
700V
800V

- Ultra Fast Recovery Rectifier
- 2 x 15 Amp current rating
- trr 70nS maximum
- Non isolated base
- 175°C junction temperature
- VRRM 600 to 800 volts

Electrical Characteristics

Average forward current per pkg
Average forward current per leg
Maximum surge current per leg
Max. peak forward voltage per leg
Max. peak reverse current per leg
Typical junction capacitance
Max. reverse recovery time

$I_{F(AV)}$ 30 Amps
 $I_{F(AV)}$ 15 Amp
 I_{FSM} 200 Amps
 V_{FM} 1.2 Volts
 I_{RM} 10 μ A
 C_J 64 pF
trr 70nS

$T_C = 150^\circ\text{C}$, square wave, $R_{\theta JC} = .75^\circ\text{C/W}$
 $T_C = 150^\circ\text{C}$, square wave, $R_{\theta JC} = 1.5^\circ\text{C/W}$
8.3ms, half sine, $T_J = 175^\circ\text{C}$
 $I_{FM} = 15\text{A}$, $T_J = 25^\circ\text{C}^*$
 V_{RRM} , $T_J = 25^\circ\text{C}$
 $V_R = 10\text{V}$, $T_J = 25^\circ\text{C}$
1/2A, 1A, 1/4A, $T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μ sec. Duty Cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance per leg
Max thermal resistance per pkg
Mounting torque
Weight

TSTG
 T_J
 $R_{\theta JC}$
 $R_{\theta JC}$

-55°C to +175°C
-55°C to +175°C
1.5°C/W Junction to case
.75°C/W Junction to case
8-10 inch pounds (#6 screw)
.22 ounces (6.36 grams) typical



8700 East Thomas Road, P.O. Box 1390
Scottsdale, AZ 85252
PH: (480) 941-6300
FAX: (480) 947-1503
www.microsemi.com

05-07-07 Rev. 2

UF3060 — UF3080

Figure 1
Typical Forward Characteristics — Per Leg

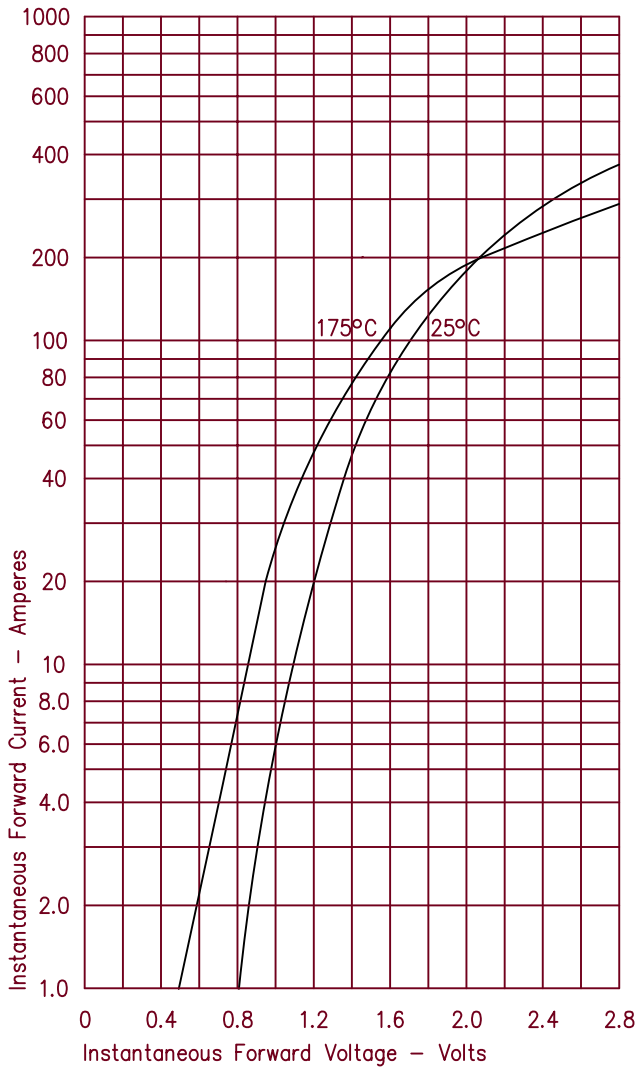


Figure 3
Typical Junction Capacitance — Per Leg

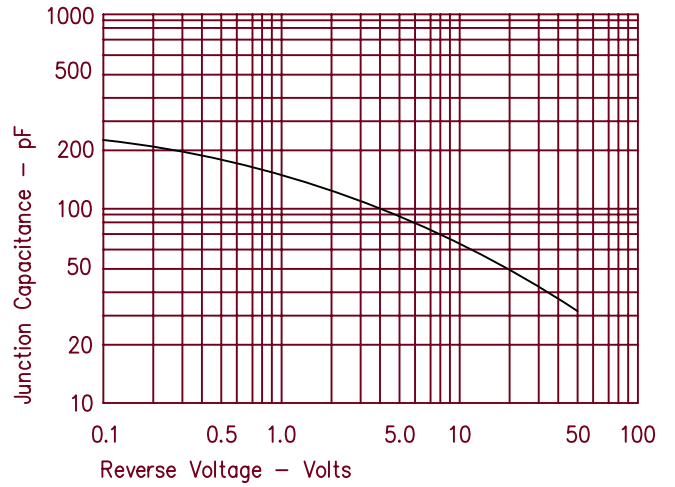


Figure 4
Forward Current Derating — Per Leg

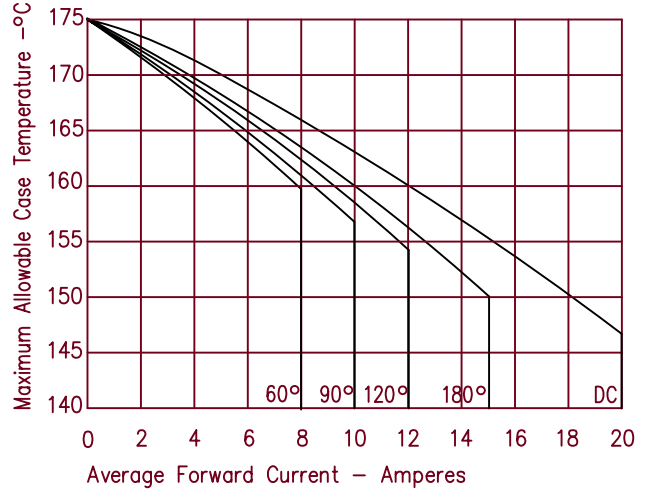


Figure 2
Typical Reverse Characteristics — Per Leg

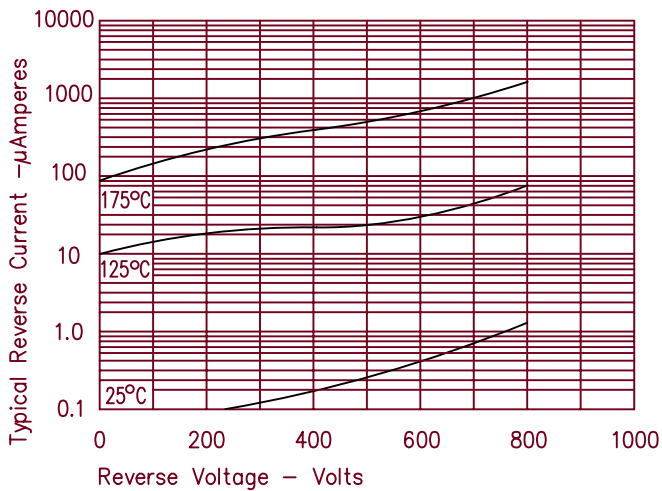


Figure 5
Maximum Forward Power Dissipation — Per Leg

