



SAW Components

Data Sheet B3861





SAW Components

B3861

Bandpass Filter

250,0 MHz

Data Sheet


Ceramic package DCC12A

Features

- IF filter for W-CDMA base station
- Usable bandwidth 4,0 MHz
- Temperature stable
- Ceramic SMD package

Terminals


- Gold plated

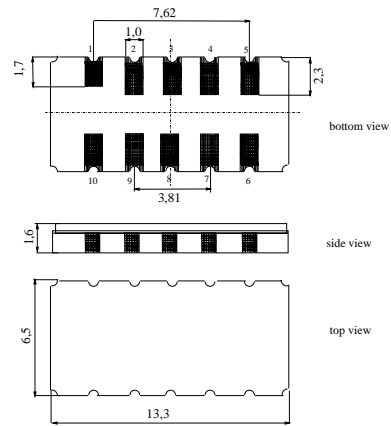

Dimensions in mm, appr. weight 0,4 g

Pin configuration

- | | |
|------------|----------------|
| 10 | Input |
| 1 | Input ground |
| 5 | Output |
| 6 | Output ground |
| 2, 4, 7, 9 | Case ground |
| 3, 8 | To be grounded |



Type	Ordering code	Marking and Package according to	Packing according to
B3861	B39251-B3861-H510	C61157-A7-A94	F61074-V8163-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-40 / +85	°C
Storage temperature range	T_{stg}	-40 / +85	°C
DC voltage	V_{DC}	0	V
Source power (average)	P_s	10	dBm
(peak < 10ns)		20	dBm



SAW Components

B3861

Bandpass Filter

250,0 MHz

Data Sheet

Characteristics

Operating temperature: $T_A = -10 \dots +85 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$ and matching network
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$ and matching network
 Group delay aperture: 125 kHz

		min.	typ.	max.	
Nominal frequency	f_N	—	250,0	—	MHz
Maximum insertion attenuation in passband¹⁾ (including matching network)	α_{\max}	—	16,3	19,0	dB
Passband width	$\alpha_{\text{rel}} \leq 1 \text{ dB}$				
	$B_{1\text{dB}}$	4,0	4,2	—	MHz
Amplitude ripple (p-p)	$\Delta\alpha$				
	$f_N \pm 2,0 \text{ MHz}$	—	0,5	1,0	dB
Group delay ripple (p-p)	$\Delta\tau$				
	$f_N \pm 2,0 \text{ MHz}$	—	120	150	ns
Relative attenuation (relative to α_{f_N})	α_{rel}				
$f_N \pm 3,0 \text{ MHz} \dots f_N \pm 3,5 \text{ MHz}$		11	15	—	dB
$f_N \pm 3,5 \text{ MHz} \dots f_N \pm 4,0 \text{ MHz}$		21	35	—	dB
$f_N \pm 4,0 \text{ MHz} \dots f_N \pm 6,0 \text{ MHz}$		24	35	—	dB
$f_N + 6,0 \text{ MHz} \dots f_N + 12,5 \text{ MHz}$		40	45	—	dB
$f_N + 12,5 \text{ MHz} \dots f_N + 14,3 \text{ MHz}$		54	57	—	dB
$f_N + 13,4 \text{ MHz}$		54	65	—	dB
$f_N + 14,3 \text{ MHz} \dots f_N + 24,6 \text{ MHz}$		40	47	—	dB
$f_N + 24,6 \text{ MHz} \dots f_N + 29,0 \text{ MHz}$		54	57	—	dB
0,1 MHz ... 244 MHz		40	50	—	dB
279 MHz ... 2,5 GHz		30	40		
VSWR	$f_N \pm 2,0 \text{ MHz}$	—	1,5:1	2:1	

1) matched with coilcraft CS0805 inductors



SAW Components

B3861

Bandpass Filter


250,0 MHz

Data Sheet

		min.	typ.	max.	
Impedance at f_N (without matching)					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	2,3 \parallel 4,1	—	k Ω \parallel pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	1,3 \parallel 12,2	—	k Ω \parallel pF
Temperature coefficient of frequency²⁾	TC_f	—	- 0,036	—	ppm/K ²
Turnover temperature	T_0	—	17	—	°C

²⁾ Temperature dependance of f_c : $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$

Matching network to 50 Ω (element values depend on pcb layout)

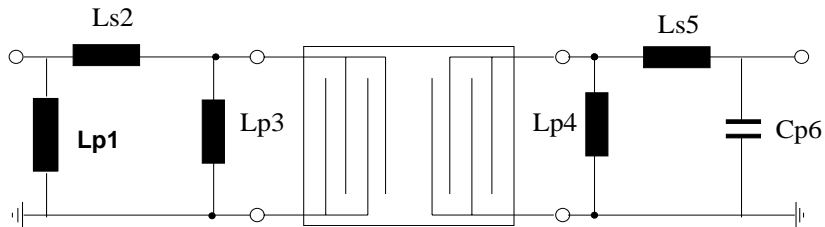

$L_{p1} = 27$ nH
 $L_{s2} = 120$ nH
 $L_{p3} = 100$ nH

$L_{p4} = 33$ nH
 $L_{s5} = 120$ nH
 $C_{p6} = 2,7$ pF



SAW Components


B3861

Bandpass Filter


250,0 MHz

Data Sheet

Normalized frequency response

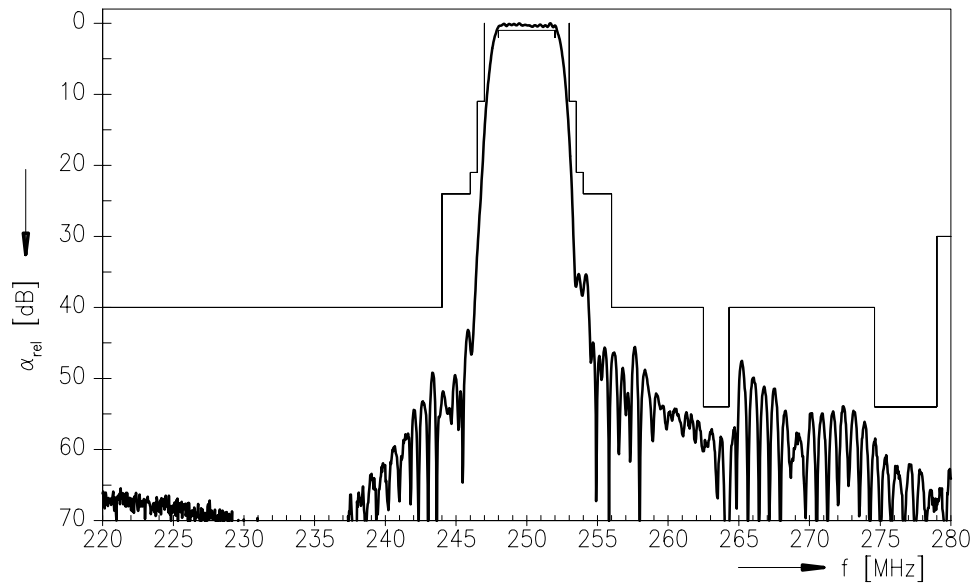

Normalized frequency response

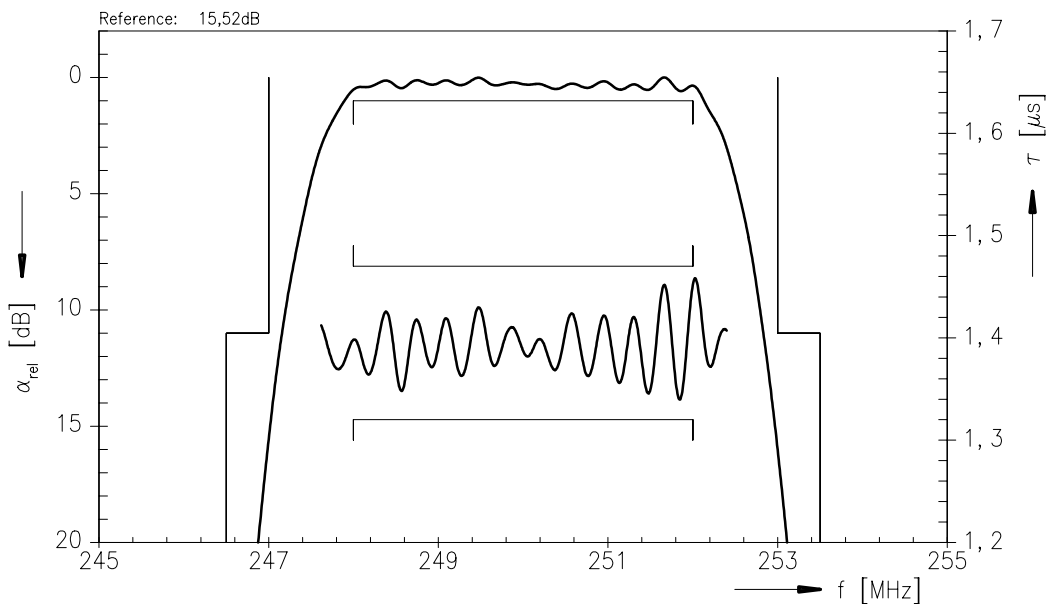



SAW Components

B3861

Bandpass Filter

250,0 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC IS
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.