



SAW Components

Data Sheet B9200





SAW Components

B9200

Low-Loss Dual Band Filter for Mobile Communication

881,5 / 1960,0 MHz

Data Sheet



Chip sized saw package **QCS10D**

Features


- Low-loss RF filter for mobile telephone CDMA 800/1900 system , receive path
- Usable passband:
Filter 1 (CDMA800): 25 MHz
Filter 2 (CDMA1900): 60 MHz
- Unbalanced to balanced operation of both filters
- Impedance transformation from 50 Ω to 100 Ω for both filters
- Ceramic package for **Surface Mounted Technology (SMT)**

Terminals


- Ni, gold-plated

Pin configuration

- 1 Input [Filter 1]
- 4 Input [Filter 2]
- 6, 7 Output, balanced [Filter 2]
- 8, 9 Output, balanced [Filter 1]
- 2, 3, 5,10 Case ground

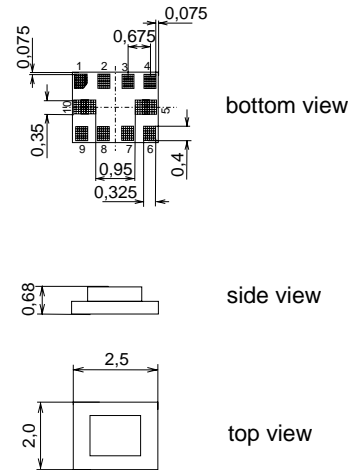

Dimensions in mm, approx. weight 12mg



Type	Ordering code	Marking and Package according to	Packing according to
B9200	B39202-B9200-G610	C61157-A7-A112	F61074-V8153-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	°C	Machine Model, 10 pulses
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}^*	50	V	
Input power at CDMA800/1900 Tx bands:				
Filter 1 (CDMA800-Rx)	P_{IN}	15	dBm	continuous wave @ +55 °C ambient
Filter 2 (CDMA1900-Rx)	P_{IN}	12	dBm	

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



Characteristics Filter 1 (CDMA800)

Operating temperature range: $T = +25 \pm 2 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 100 \text{ } \Omega$ (balanced) || 100nH

		min.	typ.	max.	
Center frequency	f_c	—	881,50	—	MHz
Maximum insertion attenuation	α_{max}				
869,0 ... 894,0 MHz		—	1,8	2,1	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0 ... 894,0 MHz		—	0,6	1,0	dB
Input VSWR					
869,0 ... 894,0 MHz		—	1,7	1,9	
Output VSWR					
869,0 ... 894,0 MHz		—	1,8	2,0	
Output amplitude balance (S_{31} / S_{21})					
869,0 ... 894,0 MHz		-0,5	-0,1/+ 0,1	0,5	dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^\circ$)					
869,0 ... 894,0 MHz		-5,0	-1/+ 2	5,0	degree
Inter-band isolation	α_{min}				
1930,0 ... 1990,0 MHz		30,0	52,0	—	dB
Attenuation	α_{min}				
10,0 ... 824,0 MHz		45,0	65,0	—	dB
824,0 ... 849,0 MHz		35,0	48,0	—	dB
915,0 ... 960,0 MHz		23,0	26,0	—	dB
960,0 ... 3000,0 MHz		45,0	59,0	—	dB
3000,0 ... 6000,0 MHz		30,0	60,0	—	dB




Characteristics Filter 1 (CDMA800)

Operating temperature range: $T = -30$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 100\ \Omega$ (balanced) || 100nH


		min.	typ.	max.	
Center frequency	f_c	—	881,50	—	MHz
Maximum insertion attenuation	α_{\max}				
869,0 ... 894,0 MHz		—	1,9	2,2	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0 ... 894,0 MHz		—	0,7	1,1	dB
Input VSWR					
869,0 ... 894,0 MHz		—	1,7	1,9	
Output VSWR					
869,0 ... 894,0 MHz		—	1,8	2,0	
Output amplitude balance (S_{31} / S_{21})					
869,0 ... 894,0 MHz		-0,5	-0,1/ +0,1	0,5	dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^{\circ}$)					
869,0 ... 894,0 MHz		-5,0	-1/+ 2	5,0	degree
Inter-band isolation	α_{\min}				
1930,0 ... 1990,0 MHz		30,0	52,0	—	dB
Attenuation	α_{\min}				
10,0 ... 824,0 MHz		45,0	65,0	—	dB
824,0 ... 849,0 MHz		35,0	44,0	—	dB
915,0 ... 960,0 MHz		23,0	25,0	—	dB
960,0 ... 3000,0 MHz		45,0	59,0	—	dB
3000,0 ... 6000,0 MHz		30,0	60,0	—	dB



Transfer function Filter 1 (CDMA800) - spec for 25 °C

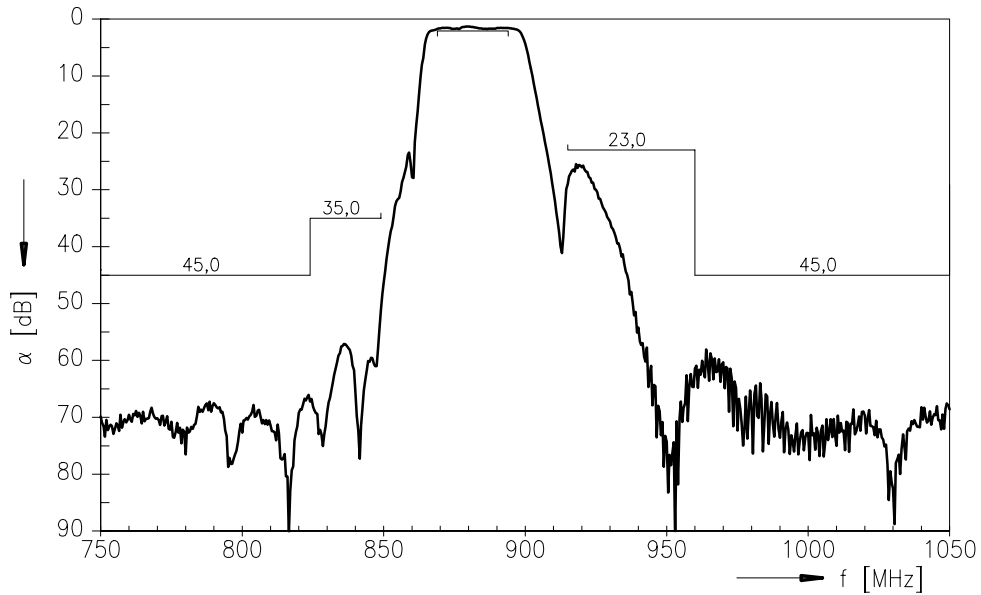

Transfer function Filter 1 (CDMA800) - wideband

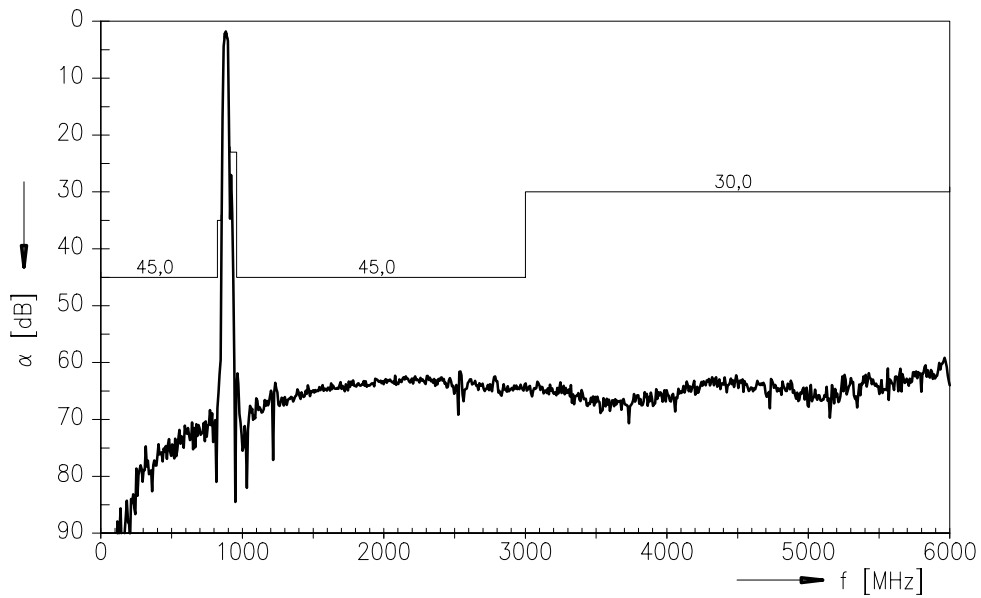



Characteristics Filter 2 (CDMA1900)

Operating temperature range: $T = +25 \pm 2 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 100 \text{ } \Omega$ (balanced) || 15nH

			min.	typ.	max.	
Center frequency	f_c		—	1960,0	—	MHz
Maximum insertion attenuation	α_{max}					
	1930,0 ... 1990,0 MHz		—	2,6	3,2	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1930,0 ... 1990,0 MHz		—	1,2	1,8	dB
Input VSWR						
	1930,0 ... 1990,0 MHz		—	2,0	2,3	
Output VSWR						
	1930,0 ... 1990,0 MHz		—	2,0	2,3	
Output amplitude balance (S_{31}/S_{21})						
	1930,0 ... 1990,0 MHz		-1,4	-1,0/+ 0,8	1,4	dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^\circ$)						
	1930,0 ... 1990,0 MHz		-12,0	-9/+ 9	12,0	degree
Inter-band isolation	α_{min}					
	869,0 ... 894,0 MHz		30,0	52,0	—	dB
Attenuation	α_{min}					
	10,0 ... 1850,0 MHz		30,0	37,0	—	dB
	1850,0 ... 1910,0 MHz		19,0	20,0	—	dB
	2040,0 ... 2200,0 MHz		25,0	32,0	—	dB
	2200,0 ... 2800,0 MHz		30,0	41,0	—	dB
	2800,0 ... 3400,0 MHz		40,0	46,0	—	dB
	3400,0 ... 6000,0 MHz		35,0	45,0	—	dB



Characteristics Filter 2 (CDMA1900)


Operating temperature range: $T = -30$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 100\ \Omega$ (balanced) || 15nH

			min.	typ.	max.	
Center frequency	f_c		—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}					
	1930,0 ... 1990,0 MHz		—	2,7	3,6	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1930,0 ... 1990,0 MHz		—	1,3	2,2 ¹⁾	dB
Input VSWR						
	1930,0 ... 1990,0 MHz		—	2,0	2,3	
Output VSWR						
	1930,0 ... 1990,0 MHz		—	2,0	2,3	
Output amplitude balance (S_{31}/S_{21})						
	1930,0 ... 1990,0 MHz		-1,8	-1,0/+ 1,2	1,8	dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^{\circ}$)						
	1930,0 ... 1990,0 MHz		-12,0	-9/ +9	12,0	degree
Inter-band isolation	α_{\min}					
	869,0 ... 894,0 MHz		30,0	52,0	—	dB
Attenuation	α_{\min}					
	10,0 ... 1850,0 MHz		30,0	37,0	—	dB
	1850,0 ... 1910,0 MHz		15,0	20,0	—	dB
	2040,0 ... 2200,0 MHz		25,0	32,0	—	dB
	2200,0 ... 2800,0 MHz		30,0	41,0	—	dB
	2800,0 ... 3400,0 MHz		40,0	46,0	—	dB
	3400,0 ... 6000,0 MHz		35,0	45,0	—	dB


1) 2,1 for $T = -30$ to $+70^{\circ}\text{C}$



Transfer function Filter 2 (CDMA1900) - spec for 25 °C

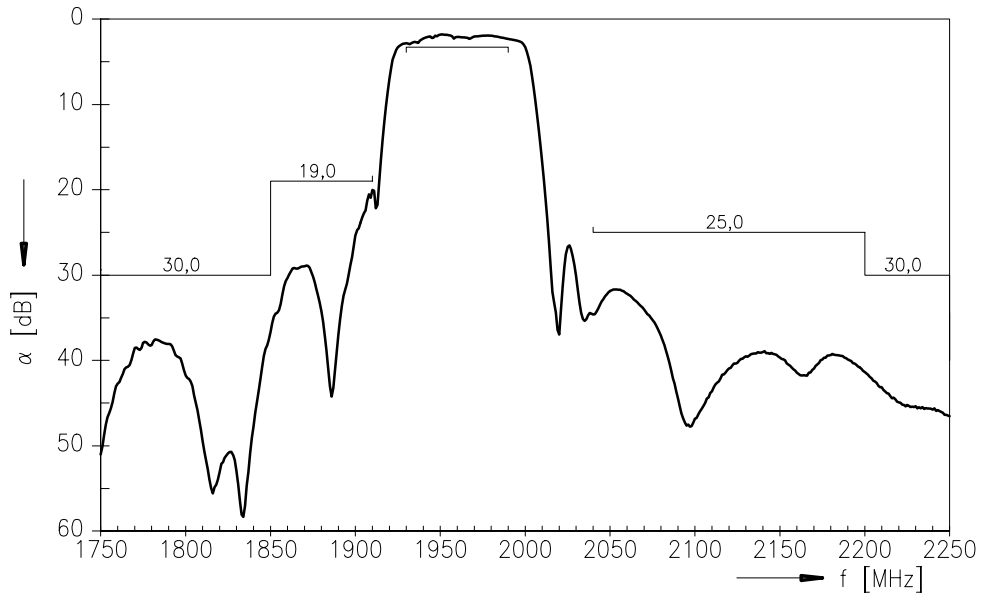

Transfer function Filter 2 (CDMA1900) - wideband

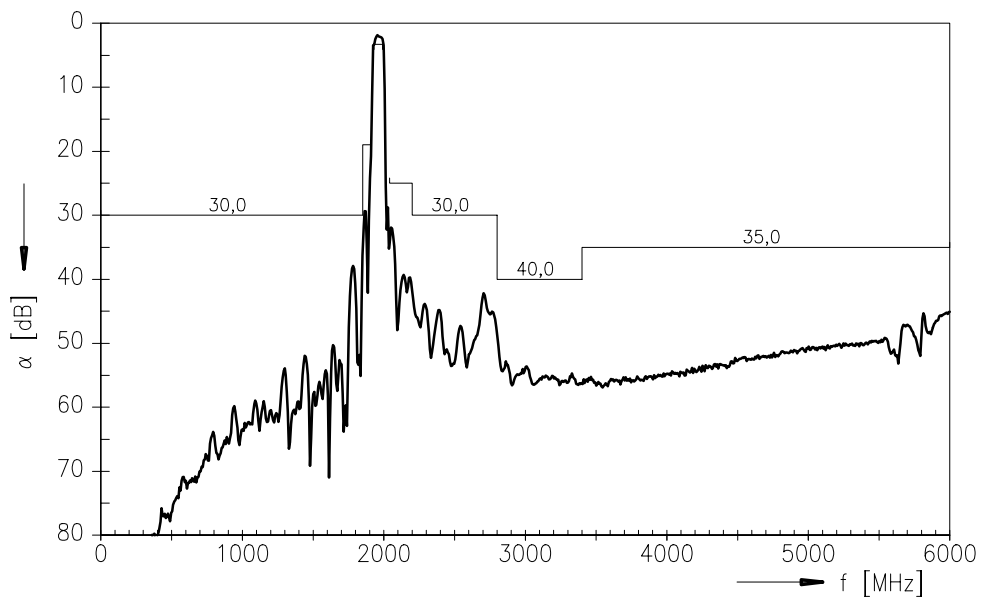



SAW Components

B9200

Low-Loss Dual Band Filter for Mobile Communication

881,5 / 1960,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.