



SAW Components

Data Sheet B4865





SAW Components

B4865

Low Loss Filter for Mobile Communication

134,04 MHz

Data Sheet




Features

- Low-loss IF filter for mobile telephone
- Channel selection in AMPS/TDMA systems
- Filter surface passivated
- Balanced or unbalanced operation possible
- Package for **Surface Mounted Technology (SMT)**

Terminals

- Ni, gold plated


SMD ceramic package **QCC12C**

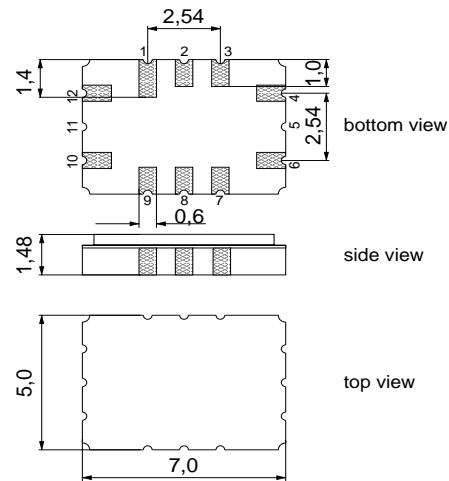

Dimensions in mm, approx. weight 0,25 g

Pin configuration

- | | |
|---------|----------------------------------|
| 12 | Input |
| 6 | Output |
| 10 | Balanced input or input ground |
| 4 | Balanced output or output ground |
| 3,9 | Case ground |
| 1,2,7,8 | Not connected |



Type	Ordering code	Marking and Package according to	Packing according to
B4865	B39131-B4865-H310	C61157-A7-A95	F61074-V8132-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30/+ 85	°C
Storage temperature range	T_{stg}	- 40/+ 85	°C
DC voltage	V_{DC}	13	V
Source power	P_s	10	dBm


SAW Components
B4865
Low Loss Filter for Mobile Communication
134,04 MHz
Data Sheet

Characteristics


Operating temperature range: $T = -30^{\circ}\text{C} \dots 85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 850 \Omega \parallel -0,8 \text{ pF}$
 Terminating load impedance: $Z_L = 850 \Omega \parallel -0,8 \text{ pF}$

		min.	typ.	max.	
Nominal frequency	f_N	—	134,04	—	MHz
3 dB Bandwidth		—	57	—	kHz
Minimum insertion attenuation (including losses in the matching network)	α_{\min}	—	3,6	4,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
$f_N - 10,0 \text{ kHz} \dots f_N + 10,0 \text{ kHz}$		—	0,2	1,5	dB
$f_N - 13,0 \text{ kHz} \dots f_N + 13,0 \text{ kHz}$		—	0,5	3,0	dB
Group delay ripple (p-p)	$\Delta\tau$				
$f_N - 13,0 \text{ kHz} \dots f_N + 13,0 \text{ kHz}$		—	3,5	10,0	μs
Relative attenuation (relative to α_{\min})	α_{rel}				
$f_N \pm 60 \text{ kHz}$		14	24	—	dB
$f_N \pm 120 \text{ kHz}$		40	50	—	dB
$f_N \pm 240 \text{ kHz}$		50	56	—	dB
$f_N \pm 330 \text{ kHz}$		55	65	—	dB
$f_N \pm 480 \text{ kHz}$		55	62	—	dB
$f_N \pm 660 \text{ kHz}$		55	70	—	dB
Spurious responses $f_N \pm 480 \text{ kHz} \dots 1 \text{ MHz}$		40	45	—	dB
Impedance within the passband					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	850 \parallel 0,8	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	850 \parallel 0,8	—	$\Omega \parallel \text{pF}$
Temperature coefficient of frequency ¹⁾	TC_f	—	-0,034	—	ppm/K ²
Turnover temperature	T_0	—	25	—	$^{\circ}\text{C}$


¹⁾ Temperature dependance of f_c : $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$

Test matching networks to 50 Ω (element values depend on pcb layout)

a) Unbalanced - unbalanced matching network

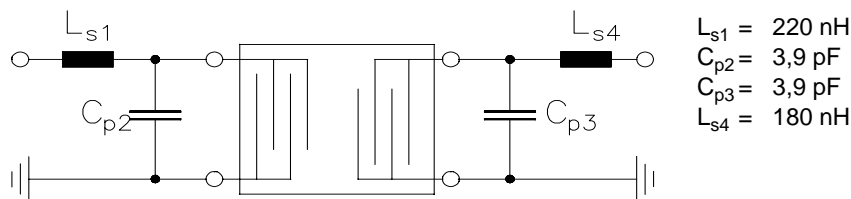

b) Balanced - balanced matching network

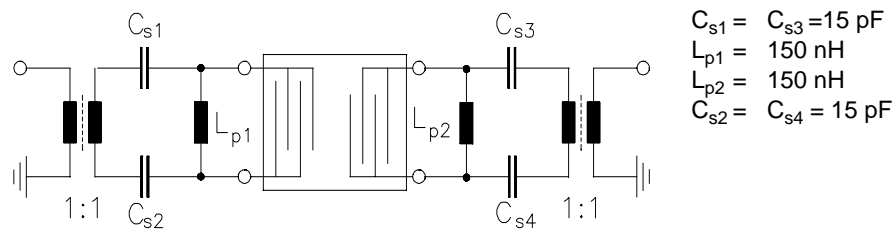

Note :

The balanced - balanced network is realized using TOKO 1:1 baluns B5FL. The insertion attenuation of each balun is 0,6 dB at f_N . The loss of the baluns is not included in the specified filter insertion attenuation.

The level of ultimate suppression may be limited by electromagnetic feedthrough depending on the layout of the pcb and the arrangement of the matching components.

The above mentioned characteristics can be realized either in balanced or in unbalanced mode of operation.

For more details see our application note *PCB Layout for Highly Selective IF Filters*.



SAW Components

B4865



Low Loss Filter for Mobile Communication

134,04 MHz

Data Sheet



Transfer functions passband and wideband, measured se/se on PCB

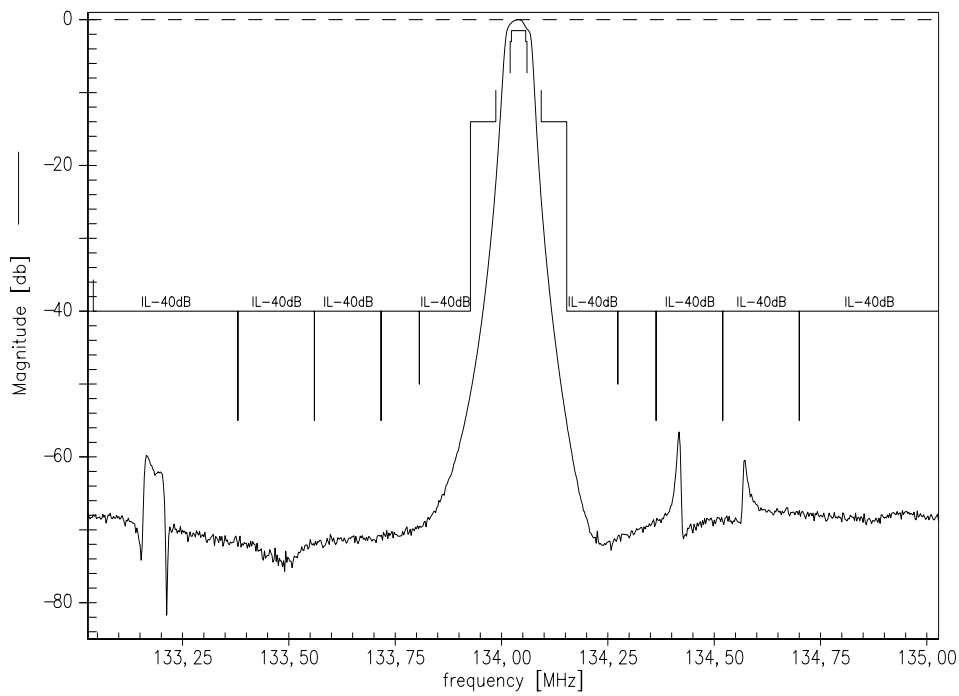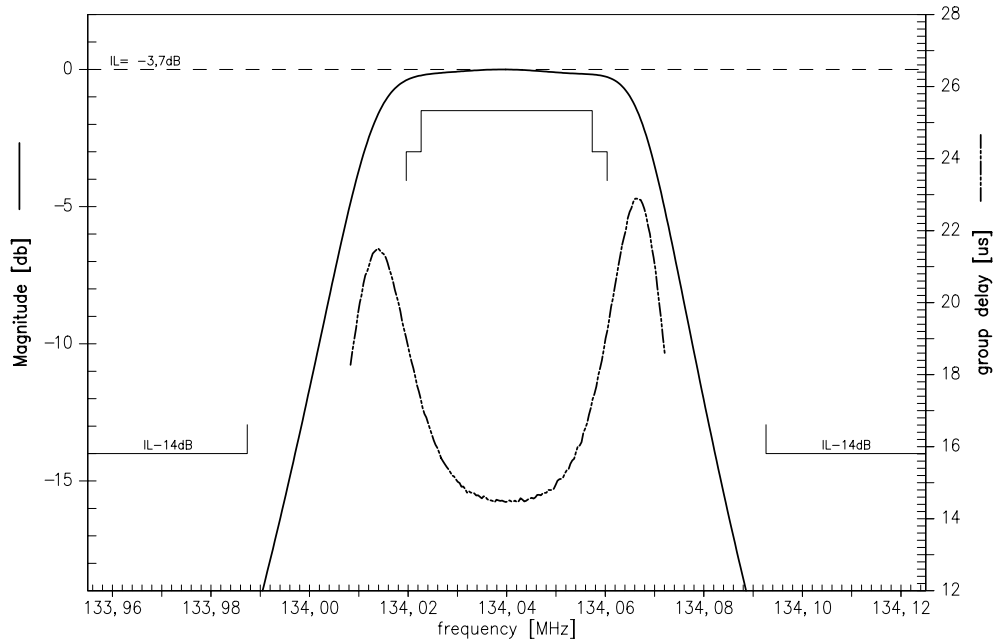



SAW Components

B4865

Low Loss Filter for Mobile Communication

134,04 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.