





## P-Channel 2.5-V (G-S) MOSFET

**TrenchFET<sup>®</sup>**  
Power MOSFETS  
**2.5-V Rated**

PRODUCT SUMMARY		
V <sub>DS</sub> (V)	r <sub>DS(on)</sub> (Ω)	I <sub>D</sub> (A)
-20	0.180 @ V <sub>GS</sub> = -4.5 V	± 1.5
	0.200 @ V <sub>GS</sub> = -3.6 V	± 1.4
	0.265 @ V <sub>GS</sub> = -2.5 V	± 1.2



ABSOLUTE MAXIMUM RATINGS (T <sub>A</sub> = 25 °C UNLESS OTHERWISE NOTED)					
Parameter		Symbol	5 secs	Steady State	Unit
Drain-Source Voltage		V <sub>DS</sub>	-20		V
Gate-Source Voltage		V <sub>GS</sub>	± 12		
Continuous Drain Current (T <sub>J</sub> = 150 °C) <sup>a</sup>	T <sub>A</sub> = 25 °C	I <sub>D</sub>	± 1.5	± 1.4	A
	T <sub>A</sub> = 85 °C		± 1.2	± 1.0	
Pulsed Drain Current		I <sub>DM</sub>	± 5		
Continuous Diode Current (Diode Conduction) <sup>a</sup>		I <sub>S</sub>	-0.8	-0.8	
Maximum Power Dissipation <sup>a</sup>	T <sub>A</sub> = 25 °C	P <sub>D</sub>	0.625	0.568	W
	T <sub>A</sub> = 85 °C		0.400	0.295	
Operating Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	-55 to 150		°C

THERMAL RESISTANCE RATINGS					
Parameter		Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient <sup>a</sup>	t ≤ 5 sec	R <sub>thJA</sub>	165	200	°C/W
	Steady State		180	220	
Maximum Junction-to-Foot (Drain)		R <sub>thJF</sub>	105	130	

Notes

a. Surface Mounted on 1" x 1" FR4 Board.





<b>SPECIFICATIONS (T<sub>J</sub> = 25 °C UNLESS OTHERWISE NOTED)</b>						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static</b>						
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = -250 μA	-0.6			V
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±12 V			±100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = -16 V, V <sub>GS</sub> = 0 V			-1	μA
		V <sub>DS</sub> = -16 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 85 °C			-5	
On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>	V <sub>DS</sub> = -5 V, V <sub>GS</sub> = -4.5 V	-2			A
Drain-Source On-State Resistance <sup>a</sup>	r <sub>DS(on)</sub>	V <sub>GS</sub> = -4.5 V, I <sub>D</sub> = -1.5 A		0.145	0.180	Ω
		V <sub>GS</sub> = -3.6 V, I <sub>D</sub> = -1.4 A		0.165	0.200	
		V <sub>GS</sub> = -2.5 V, I <sub>D</sub> = -0.8 A		0.220	0.265	
Forward Transconductance <sup>a</sup>	g <sub>fs</sub>	V <sub>DS</sub> = -10 V, I <sub>D</sub> = -1.5 A		3.8		S
Diode Forward Voltage <sup>a</sup>	V <sub>SD</sub>	I <sub>S</sub> = -0.8 A, V <sub>GS</sub> = 0 V		-0.78	-1.1	V
<b>Dynamic<sup>b</sup></b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> = -10 V, V <sub>GS</sub> = -4.5 V, I <sub>D</sub> = -1.5 A		3.7	4.5	nC
Gate-Source Charge	Q <sub>gs</sub>			0.9		
Gate-Drain Charge	Q <sub>gd</sub>			0.9		
Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> = -10 V, R <sub>L</sub> = 10 Ω I <sub>D</sub> ≅ -1 A, V <sub>GEN</sub> = -4.5 V, R <sub>G</sub> = 6 Ω		8	12	ns
Rise Time	t <sub>r</sub>			25	40	
Turn-Off Delay Time	t <sub>d(off)</sub>			21	32	
Fall Time	t <sub>f</sub>			20	30	
Source-Drain Reverse Recovery Time	t <sub>rr</sub>		I <sub>F</sub> = -0.8 A, di/dt = 100 A/μs		20	

Notes


- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.

**TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)**

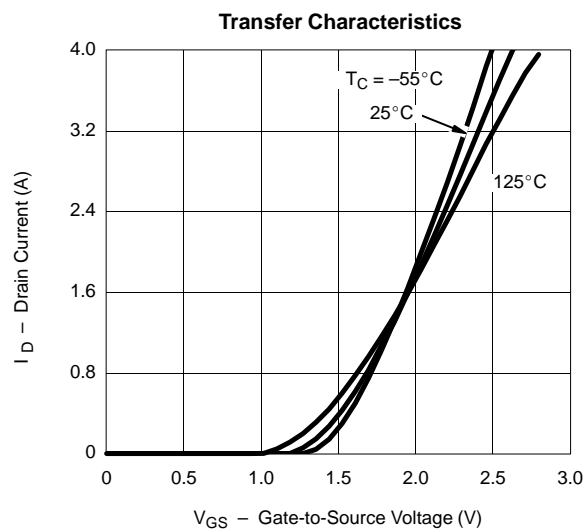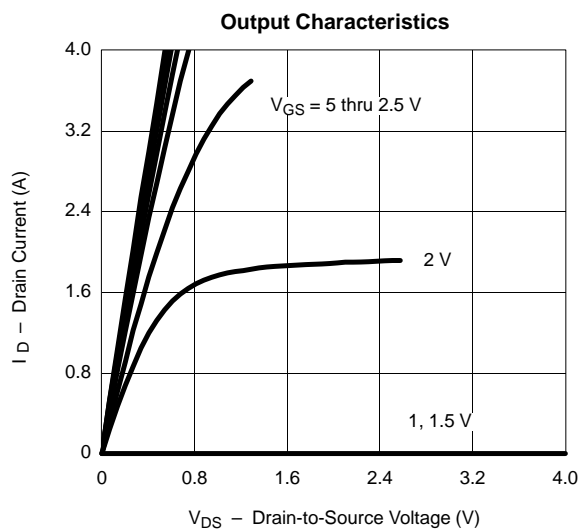


**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**


On-Resistance vs. Drain Current

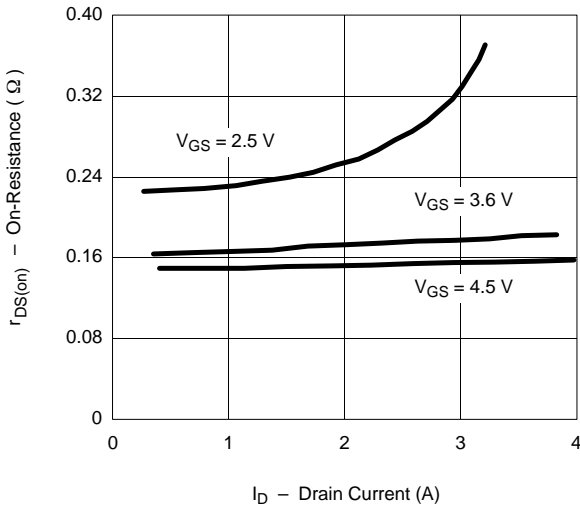


Capacitance

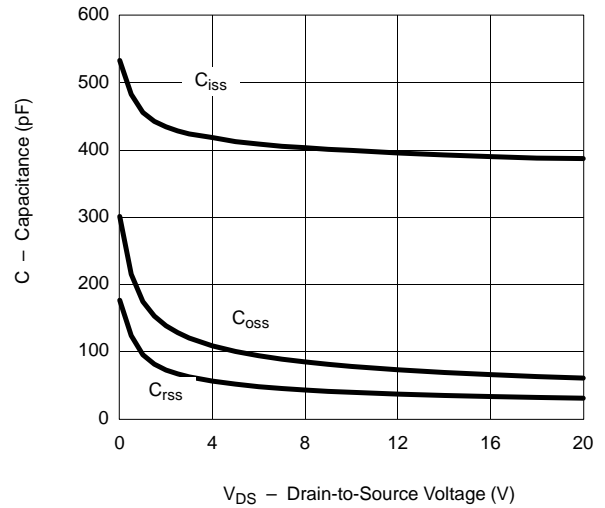


Gate Charge

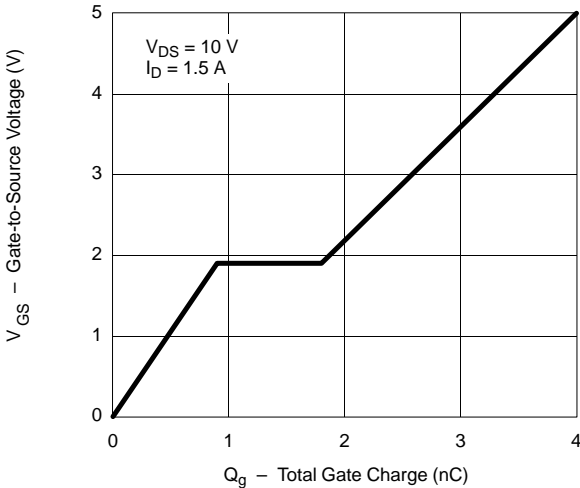


On-Resistance vs. Junction Temperature

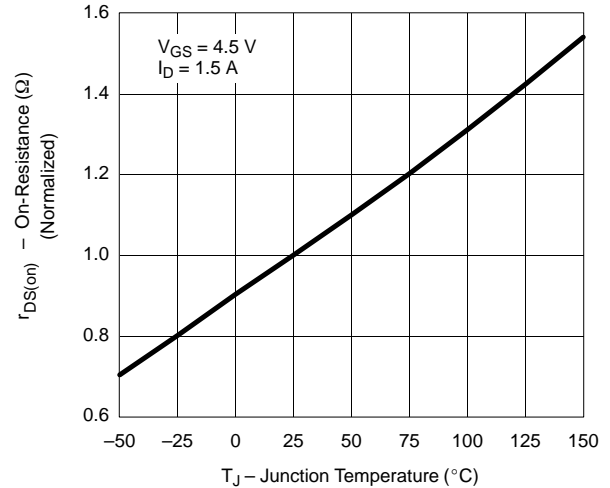

Source-Drain Diode Forward Voltage

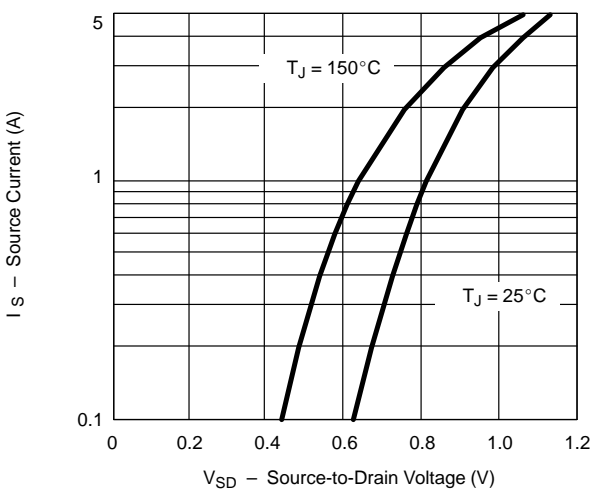

On-Resistance vs. Gate-to-Source Voltage

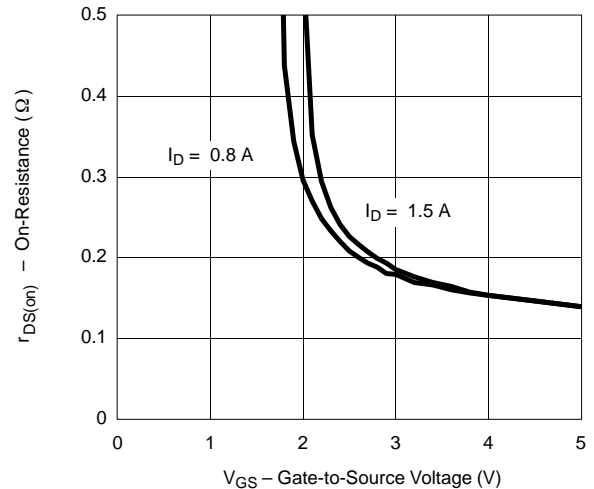



**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

