

IRLR3802
IRLU3802

HEXFET® Power MOSFET


Applications

- High Frequency 3.3V and 5V input Point-of-Load Synchronous Buck Converters
- Power Management for Netcom, Computing and Portable Applications.

| V_{DSS} | $R_{DS(on)}$ max | Q_g |
|-----------|------------------|-------|
| 12V | 8.5m Ω | 27nC |

Benefits

- Ultra-Low Gate Impedance
- Very Low $R_{DS(on)}$
- Fully Characterized Avalanche Voltage and Current

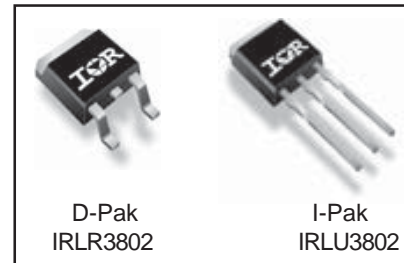

Absolute Maximum Ratings

| Symbol | Parameter | Max. | Units |
|---------------------------------|--|--------------|----------------------|
| V_{DS} | Drain-Source Voltage | 12 | V |
| V_{GS} | Gate-to-Source Voltage | ± 12 | V |
| $I_D @ T_C = 25^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 4.5\text{V}$ | 84 ④ | A |
| $I_D @ T_C = 100^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 4.5\text{V}$ | 60 ④ | |
| I_{DM} | Pulsed Drain Current ① | 320 | |
| $P_D @ T_C = 25^\circ\text{C}$ | Maximum Power Dissipation | 88 | W |
| $P_D @ T_C = 100^\circ\text{C}$ | Maximum Power Dissipation | 44 | W |
| | Linear Derating Factor | 0.59 | mW/ $^\circ\text{C}$ |
| T_J, T_{STG} | Junction and Storage Temperature Range | -55 to + 175 | $^\circ\text{C}$ |

Thermal Resistance

| | Parameter | Typ. | Max. | Units |
|-----------------|----------------------------------|------|------|---------------------------|
| $R_{\theta JC}$ | Junction-to-Case | — | 1.7 | $^\circ\text{C}/\text{W}$ |
| $R_{\theta JA}$ | Junction-to-Ambient (PCB mount)* | — | 40 | |
| $R_{\theta JA}$ | Junction-to-Ambient | — | 110 | |

Notes ① through ④ are on page 9
www.irf.com


Static @ T_J = 25°C (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|---------------------------------------|---|------|-------|------|-------|---|
| BV _{DSS} | Drain-to-Source Breakdown Voltage | 12 | — | — | V | V _{GS} = 0V, I _D = 250μA |
| ΔBV _{DSS} /ΔT _J | Breakdown Voltage Temp. Coefficient | — | 0.009 | — | V/°C | Reference to 25°C, I _D = 1mA ③ |
| R _{DS(on)} | Static Drain-to-Source On-Resistance | — | 6.5 | 8.5 | mΩ | V _{GS} = 4.5V, I _D = 15A ③ |
| | | — | — | 30 | | V _{GS} = 2.8V, I _D = 12A |
| V _{GS(th)} | Gate Threshold Voltage | 0.6 | — | 1.9 | V | V _{DS} = V _{GS} , I _D = 250μA |
| ΔV _{GS(th)} /ΔT _J | Gate Threshold Voltage Coefficient | — | -3.2 | — | mV/°C | |
| I _{DSS} | Drain-to-Source Leakage Current | — | — | 100 | μA | V _{DS} = 9.6V, V _{GS} = 0V |
| | | — | — | 250 | | V _{DS} = 9.6V, V _{GS} = 0V, T _J = 125°C |
| I _{GSS} | Gate-to-Source Forward Leakage | — | — | 200 | nA | V _{GS} = 12V |
| | Gate-to-Source Reverse Leakage | — | — | -200 | | V _{GS} = -12V |
| g _{fs} | Forward Transconductance | 31 | — | — | S | V _{DS} = 6.0V, I _D = 12A |
| Q _g | Total Gate Charge | — | 27 | 41 | nC | V _{DS} = 6.0V V _{GS} = 5.0V I _D = 6.0A See Fig.16 |
| Q _{gs1} | Pre-V _{th} Gate-Source Charge | — | 3.6 | — | | |
| Q _{gs2} | Post-V _{th} Gate-Source Charge | — | 2.0 | — | | |
| Q _{gd} | Gate-to-Drain Charge | — | 10 | — | | |
| Q _{godr} | Gate Charge Overdrive | — | 11 | — | | |
| Q _{sw} | Switch Charge (Q _{gs2} + Q _{gd}) | — | 12 | — | | |
| Q _{oss} | Output Charge | — | 28 | — | nC | V _{DS} = 10V, V _{GS} = 0V |
| t _{d(on)} | Turn-On Delay Time | — | 11 | — | ns | V _{DD} = 6.0V, V _{GS} = 4.5V③ I _D = 12A Clamped Inductive Load |
| t _r | Rise Time | — | 14 | — | | |
| t _{d(off)} | Turn-Off Delay Time | — | 21 | — | | |
| t _f | Fall Time | — | 17 | — | | |
| C _{iss} | Input Capacitance | — | 2490 | — | pF | V _{GS} = 0V V _{DS} = 6.0V f = 1.0MHz |
| C _{oss} | Output Capacitance | — | 2150 | — | | |
| C _{rss} | Reverse Transfer Capacitance | — | 530 | — | | |

Avalanche Characteristics

| Symbol | Parameter | Typ. | Max. | Units |
|-----------------|--------------------------------|------|------|-------|
| E _{AS} | Single Pulse Avalanche Energy② | — | 300 | mJ |
| I _{AR} | Avalanche Current① | — | 20 | A |

Diode Characteristics

| Symbol | Parameter | Min. | Typ. | Max. | Units | Conditions |
|-----------------|--|------|------|------|-------|--|
| I _S | Continuous Source Current (Body Diode) | — | — | 84④ | A | MOSFET symbol showing the integral reverse p-n junction diode.  |
| I _{SM} | Pulsed Source Current (Body Diode) ① | — | — | 320 | | |
| V _{SD} | Diode Forward Voltage | — | 0.81 | 1.2 | V | T _J = 25°C, I _S = 12A, V _{GS} = 0V ③ |
| | | — | 0.65 | — | | T _J = 125°C, I _S = 12A, V _{GS} = 0V ③ |
| t _{rr} | Reverse Recovery Time | — | 52 | 78 | ns | T _J = 25°C, I _F = 12A, V _R = 20V |
| Q _{rr} | Reverse Recovery Charge | — | 54 | 81 | nC | di/dt = 100A/μs ③ |
| t _{rr} | Reverse Recovery Time | — | 50 | 75 | ns | T _J = 125°C, I _F = 12A, V _R = 20V |
| Q _{rr} | Reverse Recovery Charge | — | 50 | 75 | nC | di/dt = 100A/μs ③ |

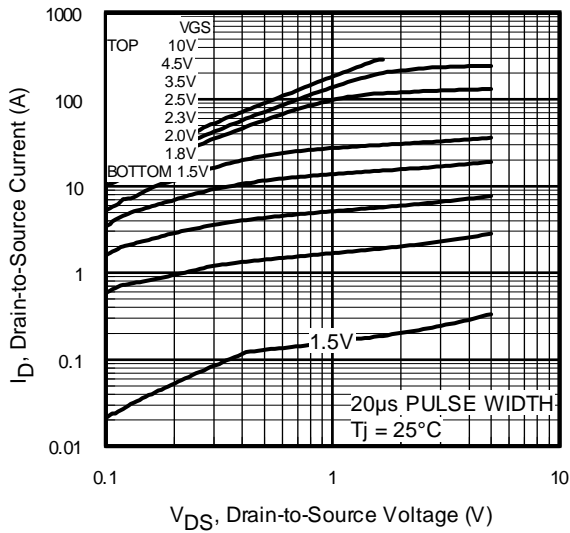


Fig 1. Typical Output Characteristics

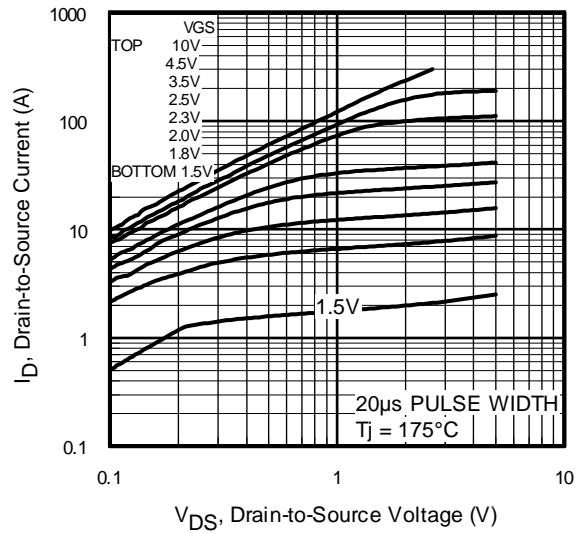


Fig 2. Typical Output Characteristics

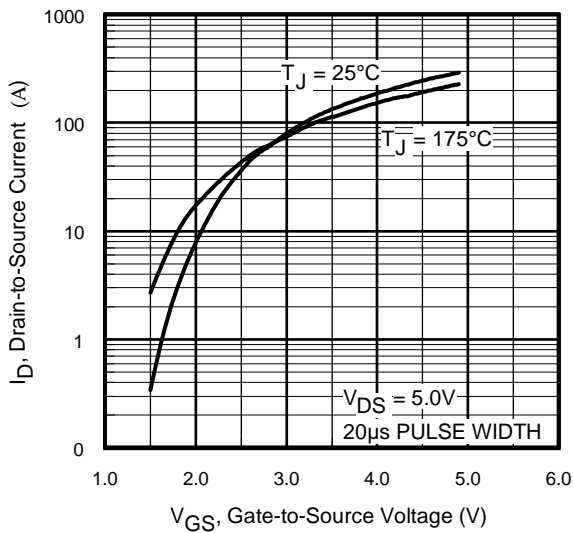


Fig 3. Typical Transfer Characteristics

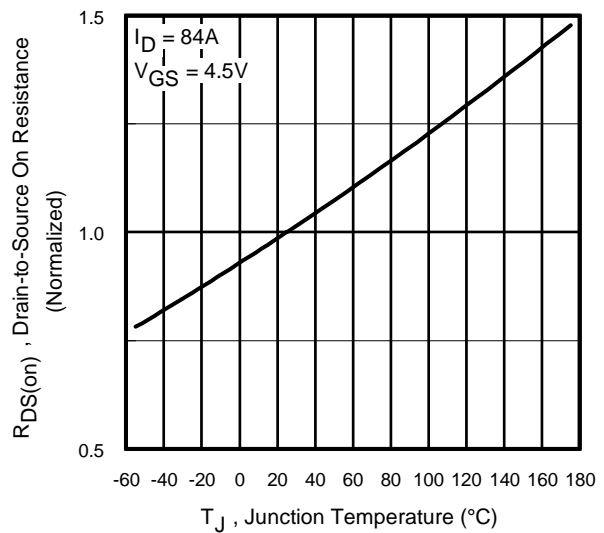


Fig 4. Normalized On-Resistance Vs. Temperature

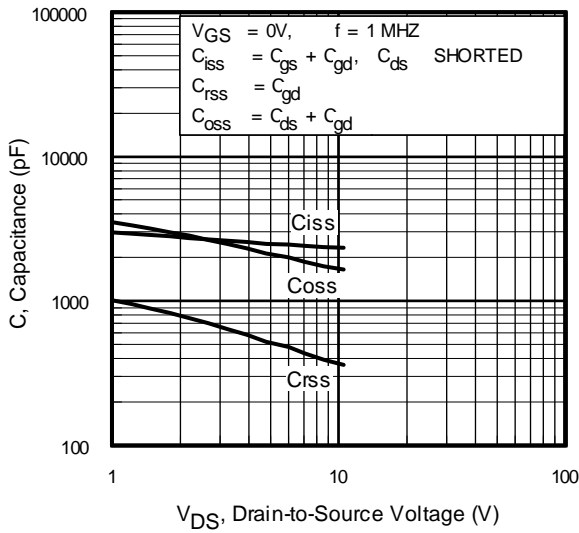


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

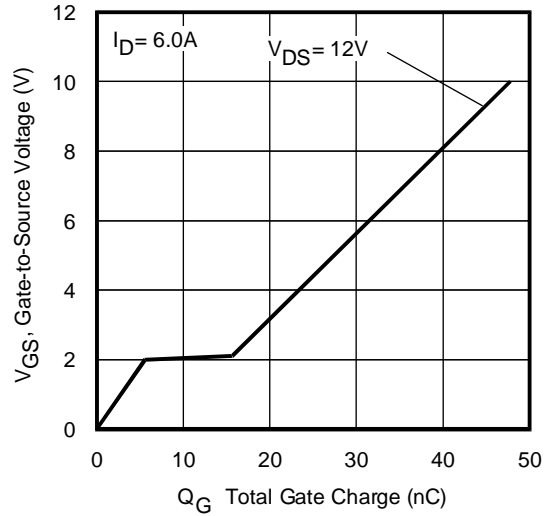


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

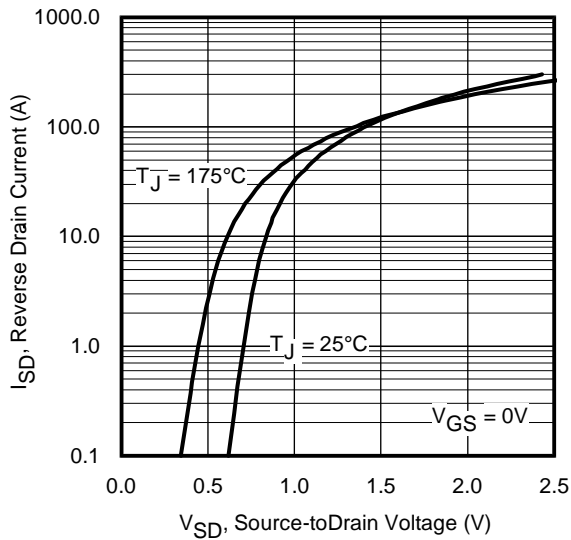


Fig 7. Typical Source-Drain Diode Forward Voltage

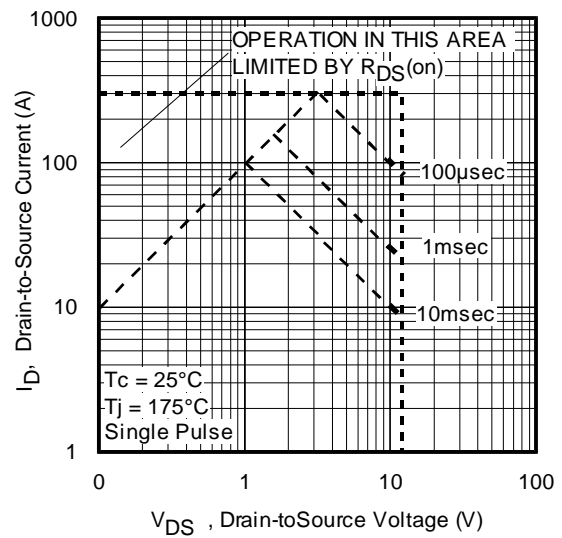


Fig 8. Maximum Safe Operating Area

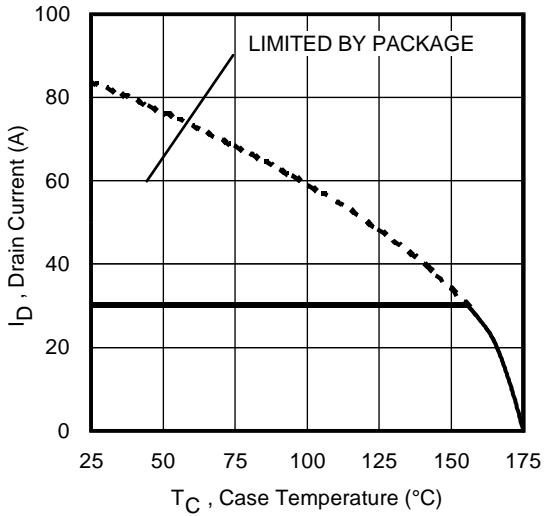


Fig 9. Maximum Drain Current Vs. Case Temperature

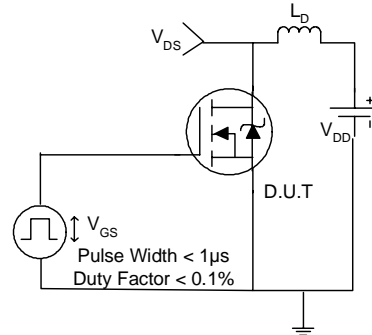


Fig 10a. Switching Time Test Circuit

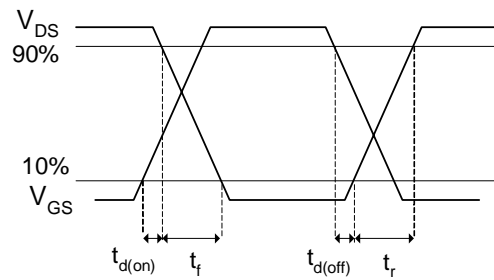


Fig 10b. Switching Time Waveforms

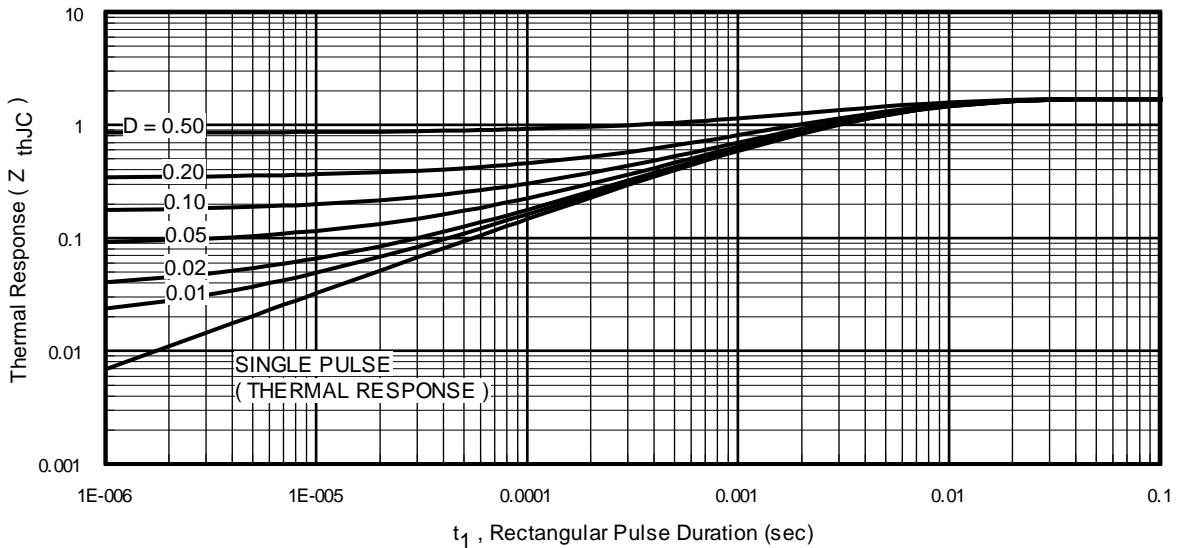


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

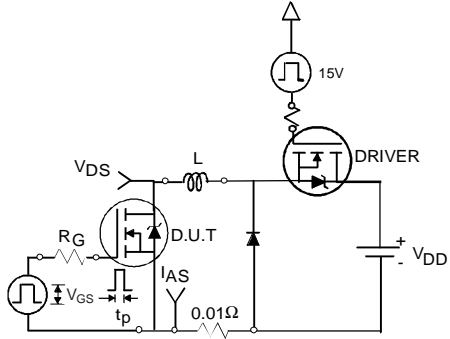


Fig 12a. Unclamped Inductive Test Circuit

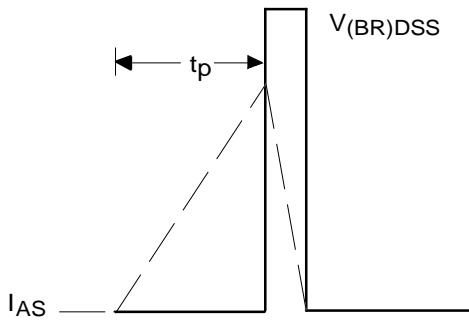


Fig 12b. Unclamped Inductive Waveforms

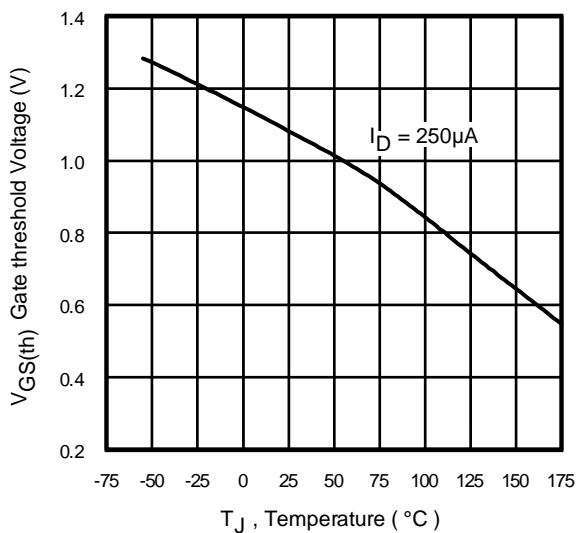


Fig 13. Threshold Voltage Vs. Temperature

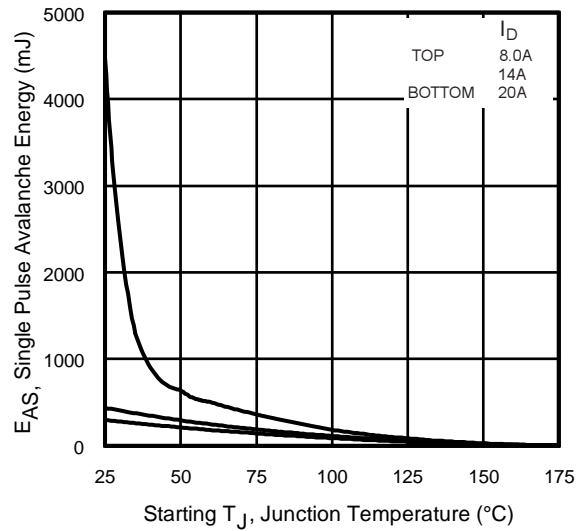


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

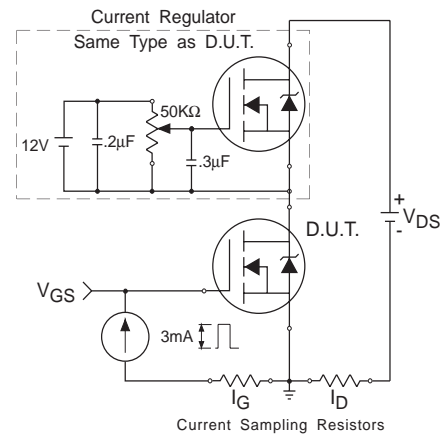


Fig 14. Gate Charge Test Circuit

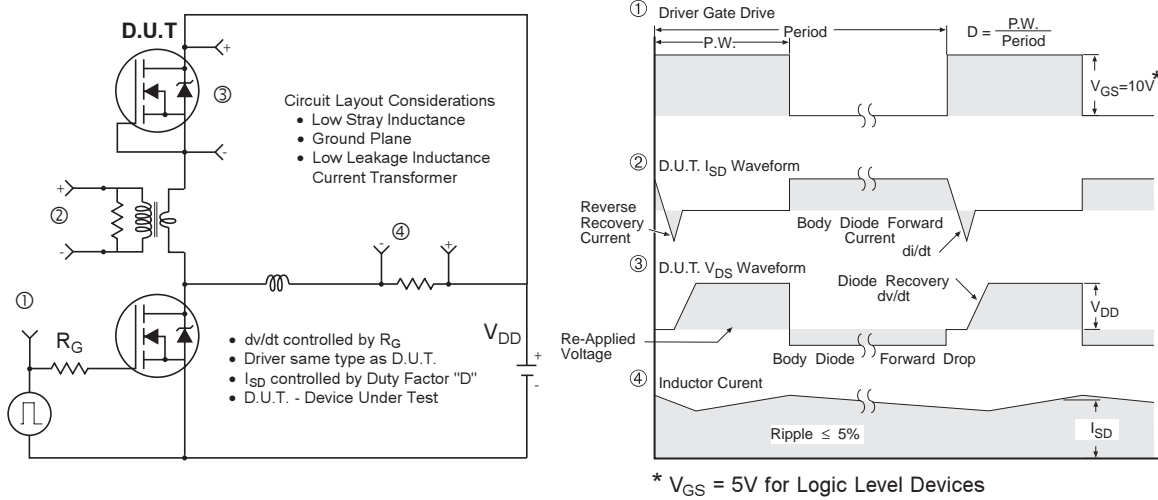


Fig 15. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs


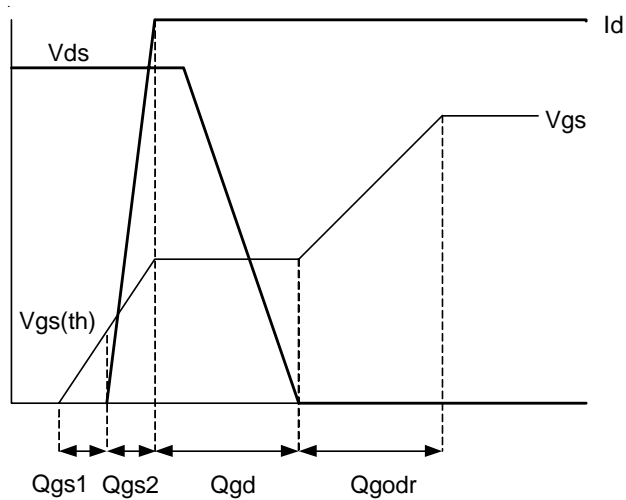


Fig 16. Gate Charge Waveform

IRLR/U3802


D-Pak (TO-252AA) Package Outline

Dimensions are shown in millimeters (inches)

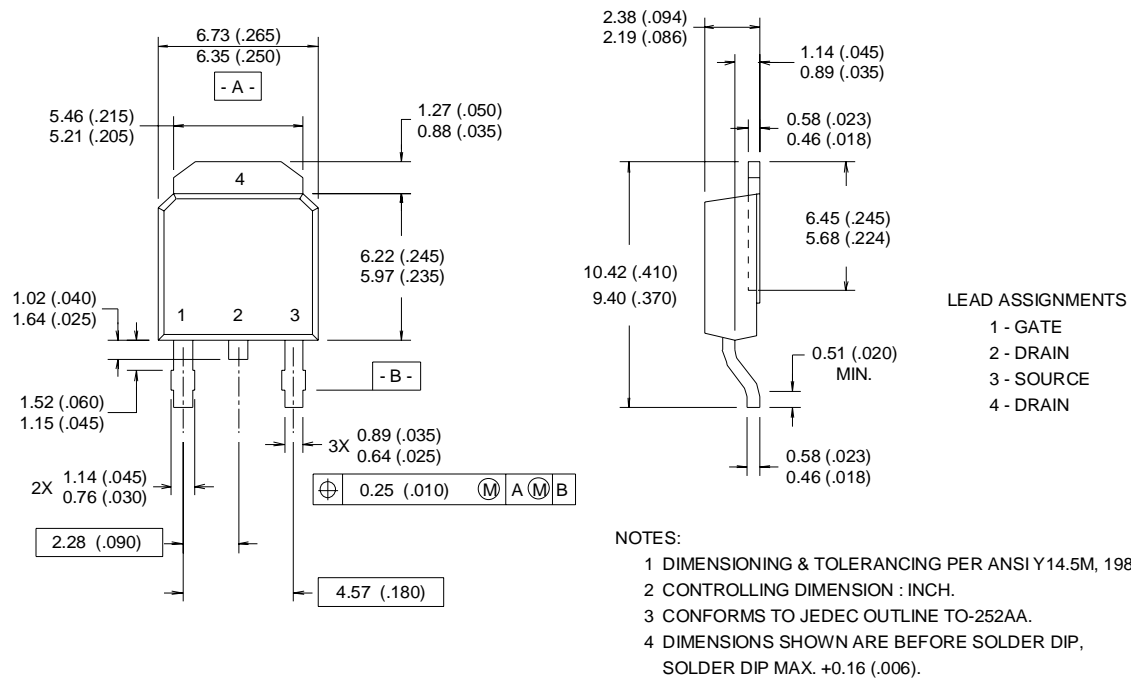



D-Pak (TO-252AA) Part Marking Information

EXAMPLE: THIS IS AN IRFR120
WITH ASSEMBLY
LOT CODE 1234
ASSEMBLED ON WW 16, 1999
IN THE ASSEMBLY LINE "A"

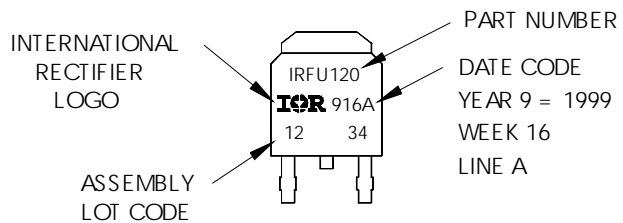

I-Pak (TO-251AA) Package Outline

Dimensions are shown in millimeters (inches)

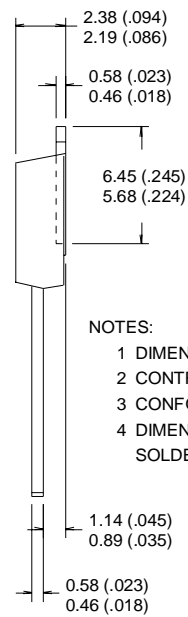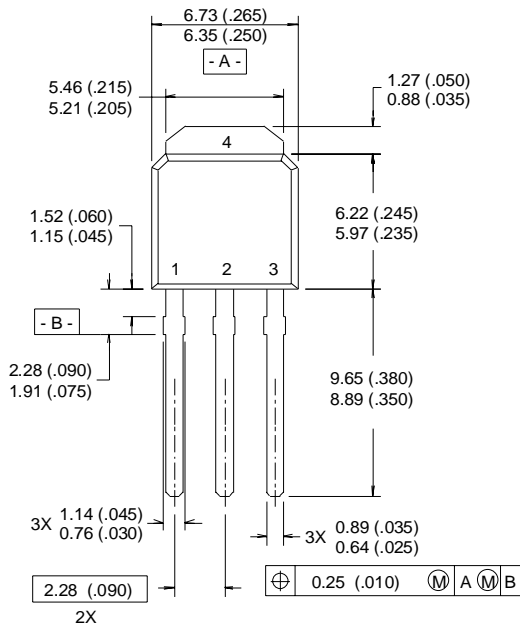

LEAD ASSIGNMENTS

- 1 - GATE
- 2 - DRAIN
- 3 - SOURCE
- 4 - DRAIN

NOTES:


- 1 DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
- 2 CONTROLLING DIMENSION : INCH.
- 3 CONFORMS TO JEDEC OUTLINE TO-252AA.
- 4 DIMENSIONS SHOWN ARE BEFORE SOLDER DIP, SOLDER DIP MAX. +0.16 (.006).

I-Pak (TO-251AA) Part Marking Information

EXAMPLE: THIS IS AN IRFR120
 WITH ASSEMBLY
 LOT CODE 5678
 ASSEMBLED ON WW 19, 1999
 IN THE ASSEMBLY LINE "A"

INTERNATIONAL
 RECTIFIER
 LOGO

ASSEMBLY
 LOT CODE

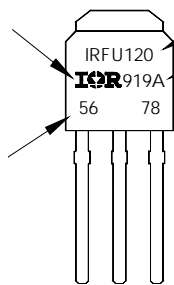


PART NUMBER
 DATE CODE
 YEAR 9 = 1999
 WEEK 19
 LINE A

IRLR/U3802

International
IR Rectifier


D-Pak (TO-252AA) Tape & Reel Information

Dimensions are shown in millimeters (inches)

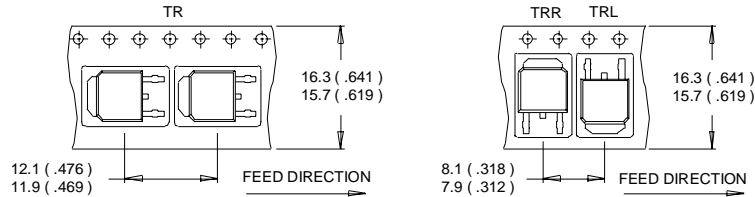

NOTES :

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

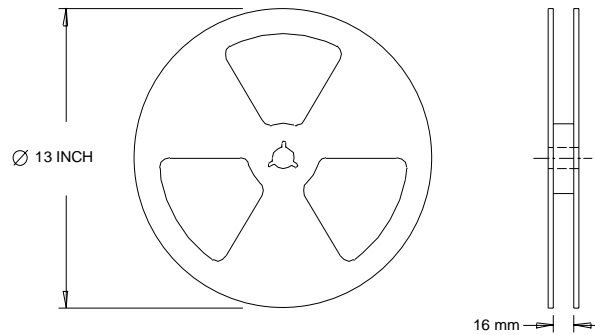

NOTES :

1. OUTLINE CONFORMS TO EIA-481.

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
 - ② Starting $T_J = 25^\circ\text{C}$, $L = 1.4\text{mH}$
 $R_G = 25\Omega$, $I_{AS} = 20\text{A}$.
 - ③ Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.
 - ④ Calculated continuous current based on maximum allowable junction temperature. Package limitation current is 30A.
- * When mounted on 1" square PCB (FR-4 or G-10 Material).
For recommended footprint and soldering techniques refer to application note #AN-994.

Data and specifications subject to change without notice.
This product has been designed and qualified for the Industrialmarket.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.8/02

www.irf.com

Note: For the most current drawings please refer to the IR website at:
<http://www.irf.com/package/>