




Specification

Contact Material	Silver Alloy
Contact Resistance	Max. 100m ohm
Operate Time	20ms
Release Time	10ms
Insulation Resistance	1000M ohm Min. (500VDC)
Dielectric Strength	Between Open Contacts 50HZ 1000VAC (for 1 min) Between Coil to Contacts 50HZ 5000VAC (for 1 min)
Vibration	10-55Hz, D.A, 1.5mm
Shock Resistance	10G
Life Expectancy Mechanical	1,000,000ops. Min. (1800 ops/hr)
Life Expectancy Electrical	100,000ops. Min.
Operating Temperature	-30°C ~ +85°C
Weight	Approx. 16g

Dimensions (Unit: mm)

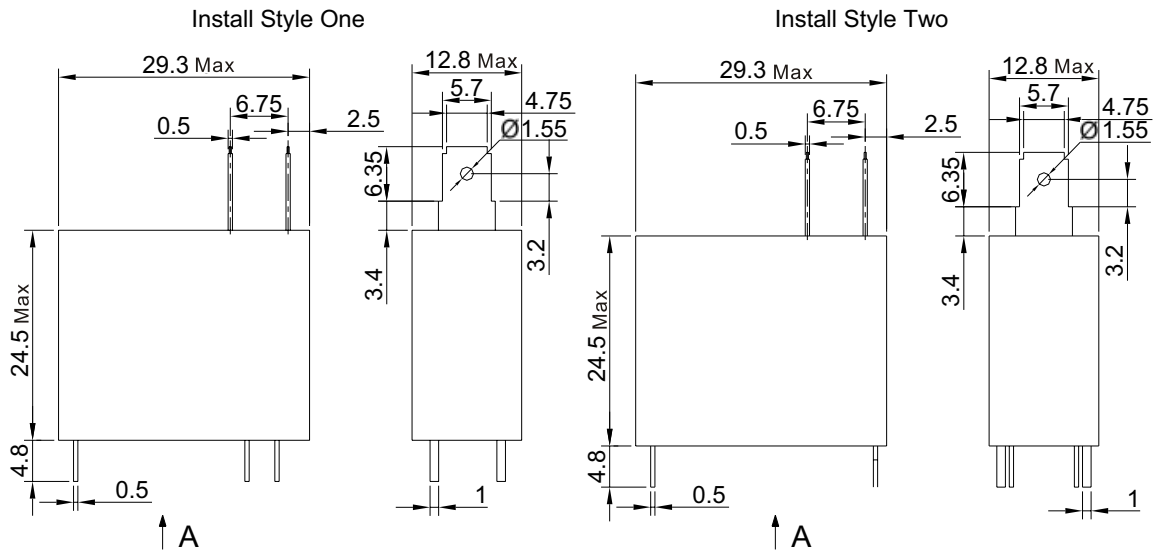

Wiring Diagrams (Bottom View)

