



1. CONFIGURATION & DIMENSIONS :

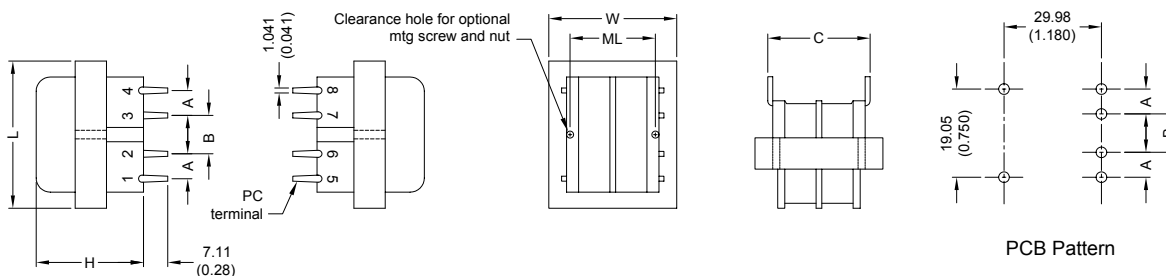

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
2	1.1	35.50 (1.40)	30.00 (1.180)	24.00 (0.95)	----	6.35 (.250)	6.35 (.250)	30.48 (1.200)	None	70

2. SCHEMATIC :



" . " indicates polarity

3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

a. Primary Voltage	AC 115 V 60 Hz .
b. No Load Primary Current	Less Than 10mA .
c. Secondary Voltage (±5%)	Series AC 74.80V . Parallel AC 37.40V .
d. Secondary Load Current	Series 0.023A . Parallel 0.046A .
e. Full Load Primary Current	Less Than 20mA .
f. Full Load Secondary Voltage (±5%)	Series 48.00V . Parallel 24.00V .
g. DC Resistance (±20%)	
Pin 1-4	Primary = 1338 Ohm .
Pin 5-6	Secondary = 240.00 Ohm .
Pin 7-8	= 324.00 Ohm .
h. Insulation Resistance	DC 500V 100Meg Ohm Of More .
i. Withstand Voltage (Hi-Pot)	AC 2500V 60Hz 1 Minutes .
j. Temperature Rise	Less Than 60 Deg C .
k. Core Size	EI-35 x 7.00 m/m .



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1