

Ceramic Surface Mount Crystal

The SM5 series incorporates a sub-miniature AT-cut strip crystal resonator housed in a standard 7.0x5.0x1.3 mm ceramic package. These compact crystals are ideal for surface mount, densely-populated PCB applications.

SM5

RoHS Compliant

Specifications:

Frequency Range:	8.0 MHz ~ 45 MHz	Fundamental
	36 MHz ~ 121 MHz	Overtone

Operating Temperature:	0°C ~ +50°C	-A
	-10°C ~ +60°C	-B
	-20°C ~ +70°C	-C
	-40°C ~ +85°C	-L

Storage Temperature:	-55°C ~ +125°C
-----------------------------	----------------

Frequency Tolerance: (at 25°C)	± 50 ppm	-50
	± 30 ppm	-30
	± 20 ppm	-20
	± 10 ppm	-10

Frequency Stability: (over temperature range)	± 50 ppm	-50
	± 30 ppm	-30
	± 20 ppm	-20
	± 10 ppm	-10

Circuit Condition:	10 pF ~ 32 pF or series
---------------------------	-------------------------

Equivalent Series Resistance:	Maximum resistance corresponds to frequency. Please see ESR table.
--------------------------------------	--

Drive Level:	0.1 mW max
---------------------	------------

Shunt Capacitance:	7 pF max
---------------------------	----------


Aging:	± 3 ppm max per year
---------------	----------------------

Optional Features:	Fundamental	-F
	3 rd , 5 th , 7 th O.T.	-3,5,7
	Tape & Reel	-TR

Note:

- Other frequencies, tolerances, stabilities, and operating temperature ranges available. Consult VTC Support for specific requirements.
- Not all combinations of the above tolerances, stabilities, and temperature ranges are available. Consult VTC Support if your requirement is not standard.
- All specifications subject to change without notice.

SM5

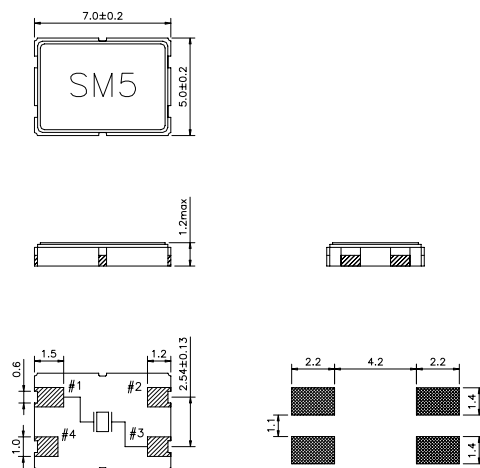

All dimensions are in mm

Ordering Information

Product name + CL + Operating Temperature Range + Tolerance + Stability + Other Code + Frequency.

i.e. SM5-20-C-30-30-F-24.000MHz