

# 30C75

definite purpose contactor



- 30C 75FLA Definite Purpose Contactor
- Robust 2 & 3 Pole Contactor
- Arc Covers as standard
- Industry Standard Mounting
- RoHS Compliant
- UL File No: E61703



Contact Data Table 1

Arrangements: 2 Form X (2PST-NO-DM)  
 3 Form X (3PST-NO-DM)

Material: AgCdO, AgSnOInO

Model No	Full Load Amps (FLA)	Poles	Line Voltage (VAC)	Locked Rotor Amps (LRA)	Resistive Amps	Max. HP		
						Voltage	1 Phase	3 Phase
30C75-1022	75	2	120	450	93	120	5	-
			240/277	450		240	15	25
			480	375		480	-	40
			600	300		600	-	40
30C75-1023	75	3	120	450	93	120	5	-
			240/277	450		240	15	25
			480	375		480	-	40
			600	300		600	-	40

FLA rating tested for 6000 cycles of endurance at 240/480/600VAC per UL508.  
 Resistive Heat rating tested for 250,000 cycles at 277VAC.  
 LRA rating tested for 6000 cycles of Locked Rotor endurance per UL508.

Coil Data Table 2

Voltage: 24-277VAC 50/60Hz. See coil data below. (480VAC available but not UL approved)  
 Insulation Class: UL Class B (130°C)

Coil Voltage Code	Rated Voltage 50/60Hz	Coil Resistance (Ohms)	Coil Operating Voltage (VAC)			Minimum Inrush		Nominal Coil Power	
			Must Release	Must Operate	Max Voltage	VA @ 50Hz	VA @ 60Hz	VA @ 50Hz	VA @ 60Hz
5024	24	0.63	6	18	26.4	285	240	42	27
5120	120	15.6	20	88	132	285	240	42	27
5230	208/240	63.5	40	177	264	285	240	42	27
5277	277	84	65	220	305	285	240	42	27
5480	480	255	150	384	528	285	240	42	27



# 30C75

## definite purpose contactor




### General Specifications

Table 2

Initial Operate Time	mS	40	Terminations		
Release Time	mS	25 (typical)	Coil Terminals		Dual 0.250" QC (#6-32 screw to special option only)
Bounce Time	mS	≤ 15	Power Terminals	box lug	14-1/0 AWG
Arc Cover		Standard	Recommended Tightening Torque	box lug	50 in.lbf (5.65 Nm)
Insulation System		UL Class B 130°C	Wire size	box lug	14-1/0 AWG
Initial Dielectric Strength					
between contacts and coil	VAC	2200			
between poles	VAC	2200 (includes shunt)			
between open contacts	VAC	2200			
Temperature Range	°C	-40 ... +65			
Unit Weight (approx.)	3 pole	4lb			

### Ordering Codes

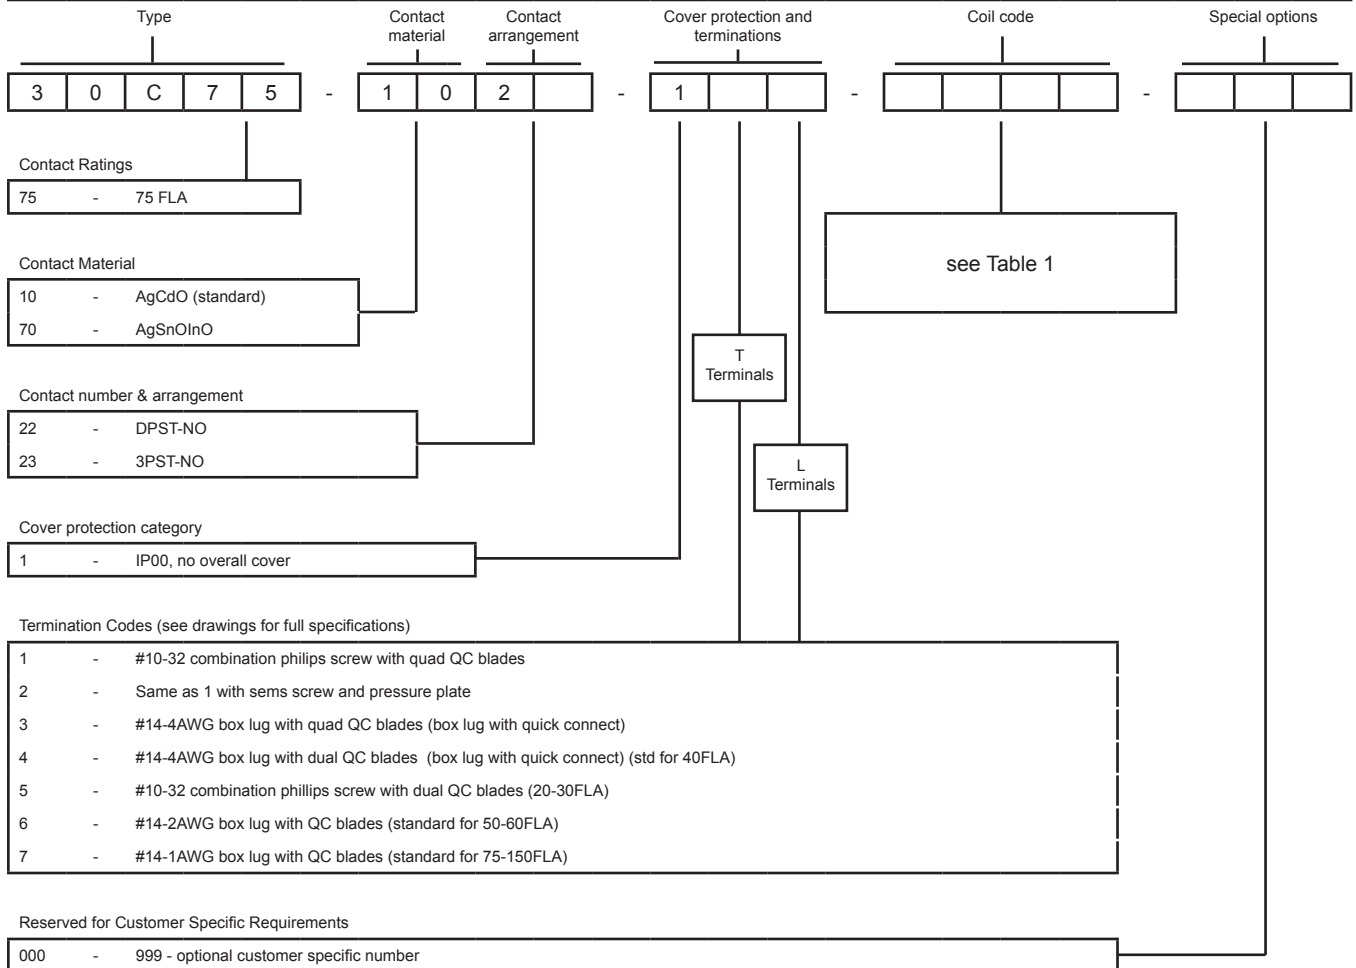


# 30C75

## definite purpose contactor



Overall Dimensions

Fig. 1

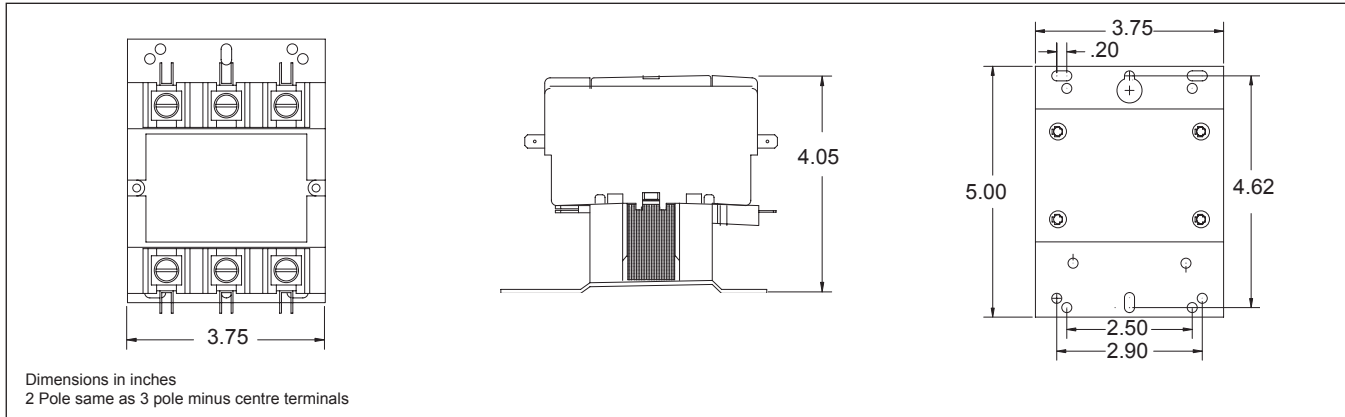

Power Terminations		
Termination Codes: 1 & 5 Standard for 20-30FLA only #10-32 combination phillips/slotted and 5/16 hex head screw with #12 washer		Termination Code: 6 Standard for 50 & 60FLA Box Lug 14-2 AWG (Cu/Al)
Termination Code: 2 Optional for 20-40FLA only. #10-32 sems screw with pressure plate		Termination Code: 7 Standard for 75 & 90FLA Box Lug 14-1 AWG (Cu/Al)
Termination Codes: 3 & 4 Standard for 40FLA only Box Lug 14-4 AWG (Cu/Al)		Dimension in inches

