

Specification of Pt Thermal Sensor

1. Electrical Characteristics of SA10100609

- 1-1 Resistance value (at 0°C) : 100±0.12 ohm
 1-2 Maximum applied current : 1mA
 1-3 Insulation resistance : exceed 100M ohm at 500V DC
 (@ room temp.)
 1-4 Thermal response time (90%) : 10 sec. max. (in air, 1m/sec.)
 1-5 Self heating : 2.5 mW/°C (in air, 1m, sec.)
 1-6 Operation temperature range : -50°C to 500°C

2. Outline Drawings

Please see attached figure.

3. Reliability Test

- 3-1 High temperature test
 Keep the Pt sensor in 500°C for 1000 hours
 3-2 Low temperature test
 Keep the Pt sensor in -50°C for 1000 hours
 3-3 Humidity test
 Keep the Pt sensor in 60°C and 90 to 95% RH for 1000 hours
 3-4 Thermal shock test
 Keep the Pt sensor in 0°C ice water for at least 15 sec.,
 then within 10 sec. directly put into 100°C hot water for
 at least 15 sec.. The above process should be proceeded for
 at least 10 cycles.

After each item test, valuation of item 1-1 should be within 0.12%
 and item 1-3 should exceed 100M ohm at 500VDC.



A UNLESS OTHERWISE SPECIFIED TOLERANCES ON : X = ± X.X = ± X.XX = ± ANGLES ± HOLE DIA. ±	DRAWN BY:		乾坤科技股份有限公司 CYNTEC CO., LTD.	
	DESIGNED BY:			
	CHECKED BY:			
	APPROVED BY:		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CYNTEC CO., LTD. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
SCALE: X	UNIT: X			
TITLE: ENGINEERING SPEC. OF SA10100609		DOCUMENT NO.	SA10100609	PAGE REV. A0

D

C

B

A

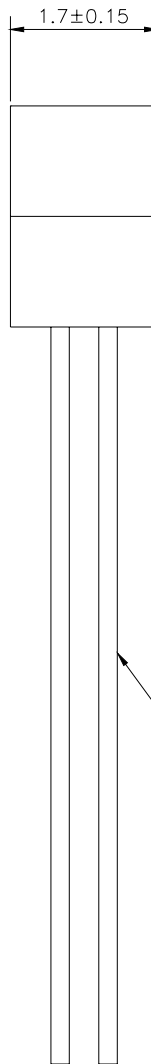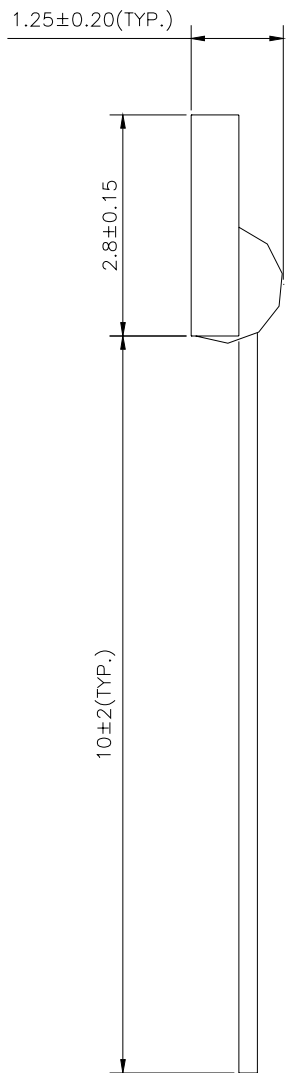

THE MATERIAL OF WIRE
IS Ni WIRE, $\phi 0.22$ (TYP.)

UNLESS OTHERWISE SPECIFIED
TOLERANCES ON :

X = ±

X.X = ±

X.XX = ±

ANGLES ± HOLE DIA.±

DRAWN BY:

DESIGNED BY:

CHECKED BY:

APPROVED BY:

SCALE: 10:1 UNIT: MM

乾坤科技股份有限公司
CYNTEC CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CYNTEC CO., LTD.
AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: ENGINEERING SPEC. OF SA10100609

DOCUMENT
NO.

SA10100609

PAGE
REV.
A0

Temperature (°C)	Nominal Resistance(ohm)	Resistance Deviation(ohm)	Temperature Deviation(ohm)
-50	80.31	0.22	0.55
-25	90.19	0.17	0.43
0	100.00	0.12	0.30
25	109.73	0.16	0.43
50	119.40	0.21	0.55
75	128.99	0.26	0.68
100	138.51	0.30	0.80
125	147.95	0.35	0.93
150	157.33	0.39	1.05
175	166.63	0.44	1.18
200	175.86	0.48	1.30
225	185.01	0.52	1.43
250	194.10	0.56	1.55
275	203.11	0.60	1.68
300	212.05	0.64	1.80
325	220.92	0.68	1.93
350	229.72	0.72	2.05
375	238.44	0.76	2.18
400	247.09	0.79	2.30
425	255.67	0.83	2.43
450	264.18	0.86	2.55
475	272.61	0.90	2.68
500	280.98	0.93	2.80

(1)Relationship of temperature with resistance

When $t \geq 0^\circ\text{C}$	When $t < 0^\circ\text{C}$
$R_t = R_o (1 + At + Bt^2)$	$R_t = R_o [1 + At + Bt^2 + C(t-100)t^3]$
$A = 3.9083E-03$	$A = 3.9083E-03$
$B = -5.7750E-07$	$B = -5.7750E-07$
	$C = -4.1830E-12$
	$R_o = 1.000E+02$

(2)Temperature deviation

$$\pm(a + b |t|) ^\circ\text{C}$$

$$a = 0.300$$

$$b = 0.005$$

(3)Specifications are subject to change without notice

UNLESS OTHERWISE SPECIFIED TOLERANCES ON : X = ± X.X = ± X.XX = ± ANGLES ± HOLE DIA. ±	DRAWN BY:		乾坤科技股份有限公司 CYNTEC CO., LTD.	
	DESIGNED BY:			
	CHECKED BY:			
	APPROVED BY:		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CYNTEC CO., LTD. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
SCALE: X	UNIT: X			
TITLE: ENGINEERING SPEC. OF SA10100609		DOCUMENT NO.	SA10100609	PAGE REV. AO