
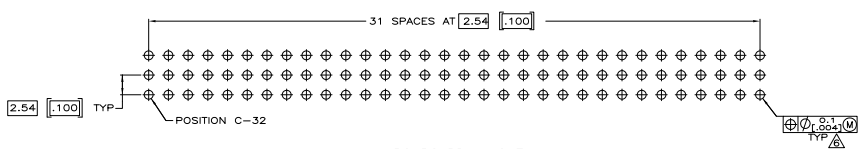


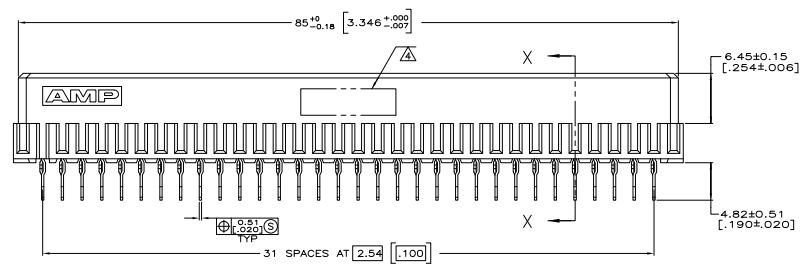


REV	DATE	DESCRIPTION	BY	CHK	APP
AD	25				
G		REVISED FOR ENH 0512-0512-04			

- △ HOUSING MATERIAL: GLASS-FILLED POLYESTER, COLOR: GRAY.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH: 0.00076[.00030] GOLD IN CONTACT AREA, 0.00127[.00050] NICKEL UNDERPLATE ALL OVER, TIN-LEAD ON POSTS. IN THIS APPROXIMATE AREA.
- △ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO HOT-STAMPED IN THIS APPROXIMATE AREA.
- △ POINT OF MEASUREMENT FOR GOLD.
- △ ACTION PIN POSTS REQUIRE 1.57[.062] MIN THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE #1.51±0.02 [0.453±.001] DRILLED HOLE WITH 0.02-0.07[.001-.003] COPPER AND 0.008[.003] MIN TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING, #0.94-1.09 [0.37-.043].
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD ON POSTS.

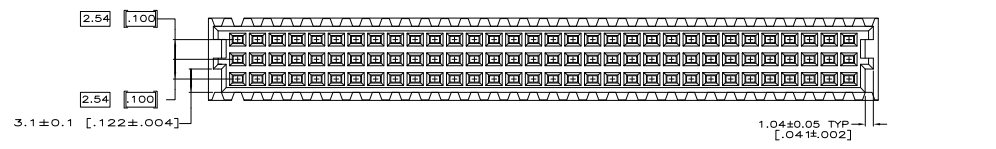

POSITIONS	LOADED	POSITION	ASSY PART NUMBER
1 THRU 32	X X X X	96	535056-5
1 THRU 32	X X X X	96	535056-4
POSITIONS LOADED	C B A	100-005	
POSITIONS LOADED			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	BY	CHK	APP
DESIGNED	BY	DATE	BY	CHK	APP
DRAWN	BY	DATE	BY	CHK	APP
CHECKED	BY	DATE	BY	CHK	APP
APPROVED	BY	DATE	BY	CHK	APP