


REV	INITIALS	DATE	DESCRIPTION

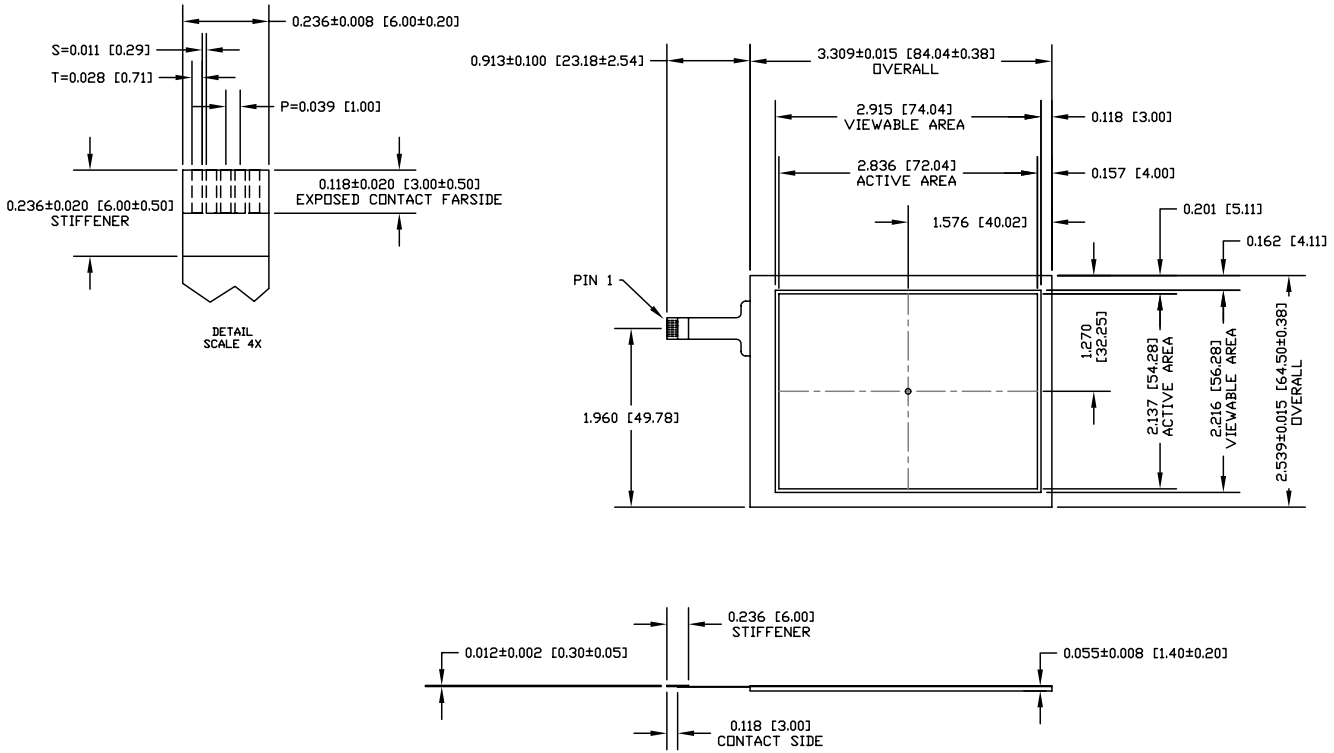

NOTES:

- TOLERANCE ± 0.015 UNLESS NOTED OTHERWISE.
- TOP CONDUCTIVE LAYER TO BE 0.007" THICK POLYESTER WITH A DIFFUSED SCRATCH RESISTANT COATING.
- PIN ONE LOCATION IS THE RIGHT PIN WHEN VIEWING SCREEN WITH CABLE TO THE LEFT.
- PINOUT TO BE AS INDICATED.
 - PIN 1 - UPPER RIGHT.
 - PIN 2 - UPPER LEFT.
 - PIN 3 - SENSE.
 - PIN 4 - LOWER LEFT.
 - PIN 5 - LOWER RIGHT.
- FPC TAIL CONSTRUCTION IS KAPTON OVER 0.5 OZ Cu TRACES.
- TAIL CONTACT END TO MATE WITH ZIF TYPE CONNECTOR.
- NOMINAL GLASS THICKNESS IS .043 CHEMICALLY STRENGTHENED.

BERGQUIST TOUCH PRODUCTS			
30 WASHINGTON STREET CANNON FALLS, MN 55609			
TITLE: 3.5" DIAGONAL 5 WIRE TOUCHSCREEN			
DRN: MLR	DATE: 2/1/08	SCALE: 1:1	TOL: ± 0.015
CHKD:	DATE:	PART NUMBER:	400333
APVD:	DATE:	REV:	