




REV	DATE	DESCRIPTION	BY	APP
AJ	00			
A1		REVISED FOR ECO 06-027620		1/19/2007 DW JL

△ USE WITH PRO-CRIMPER 354940-1
 2. SEE INSTRUCTION SHEET 408-9780

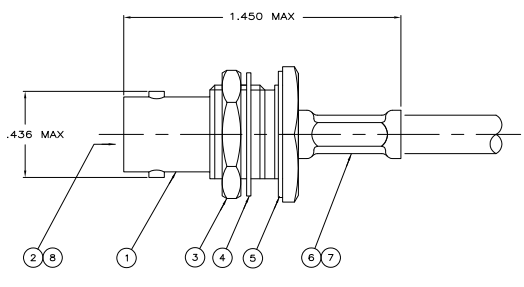

RECOMMENDED STRIP LENGTH



SUGGESTED PANEL CUTOUT

RG-174, RG-188 & RG-316	.065	.175	58436-3	227194-3	9-413658-0	329633	1-329632-2	1-329631-2	1-413774-5	413772-3	5413771-3
RG-58/U, 58A/U, 58B/U, 58C/U & BELDEN 88240	.068	.213	58436-1		9-221132-0	329633	1-329632-2	1-329631-2	413774-5	413772-1	5413771-1
FOR USE WITH CABLE	CONTACT CRIMP (HEX)	FERRULE CRIMP (HEX)	DIE SET △	⑦ TUBING QTY=1	⑥ FERRULE QTY=1	⑤ GASKET QTY=1	④ LOCKWASHER QTY=1	③ JAM NUT QTY=1	② CONTACT QTY=1	① JACK ASSEMBLY QTY=1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY	APPROVED BY	DATE	REVISED BY	DATE

TTI ELECTRONICS CORPORATION
 HARRISBURG, PA 17105-3608
 JACK, BULKHEAD, HEX CRIMP, COMMERCIAL BNC

SIZE: 4.1
 SHEET: 1 OF 1
 REV: A1