



REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE & CANCEL	1/3/03
	BXA-12553/KIT & BXA-12553/INV	

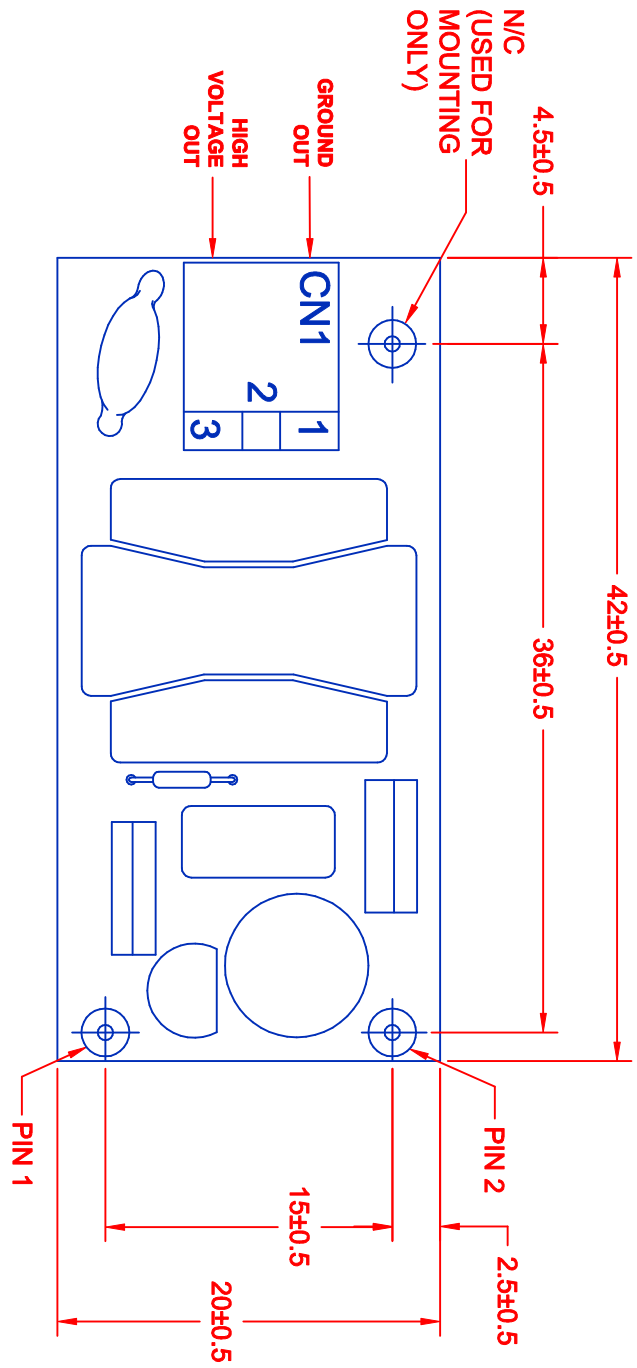

NOTE:
 MATING CONNECTOR IS NOT INCLUDED WITH INVERTER.
 JKL WIRE HARNESS PART NO. BXC-10566 CAN BE ORDERED SEPARATELY.

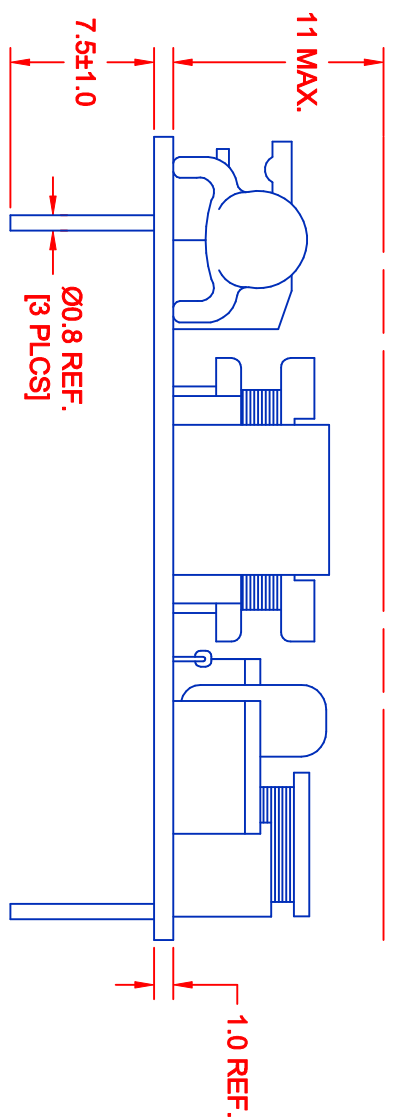

CN1 PIN #	TO LAMP
1	OUT GROUND
2	N/C
3	HIGH V

BOARD PIN #	INPUT
1	+V (V in)
2	V (GND)

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	----	180	250
OUTPUT VOLTAGE: (Vrms)	600	700	800
OUTPUT CURRENT (marms)	4.0	5.5	7.0
OUTPUT FREQUENCY: (kHz)	10	25	40
OPERATING TEMP: (CELSIUS)	0	25	50

JKL COMPONENTS CORPORATION

CCFL POWER SUPPLY

METRIC DIMENSIONS ARE IN MILLIMETERS
 TOLERANCE UNLESS OTHERWISE SPECIFIED
 1 PL +/- 0.3
 2 PL +/- 0

THIRD ANGLE PROJECTION

DRAWN BY L. WENGSTROM F.D. 1/3/03
 APP'D BY DATE
 SCALE A
 SIZE 55335
 FCQM NO. 55335
 DRAWING NO. BXA-12553

RELEASED DATE 1/3/03
 REVISION DATE
 REV. NO. SHEET OF

- CAD DRAWING -
 MANUAL REVISIONS NOT PERMITTED