#### **Specification**



# **Specification**

Spec No. : FXP245


Part No. : **FXP245.07.0100A** 

Model : 450MHz ISM Band Flex Circuit Antenna

Features : 75\*45\*0.1mm

100mm Ø1.13 Cable

**RoHS** ✓

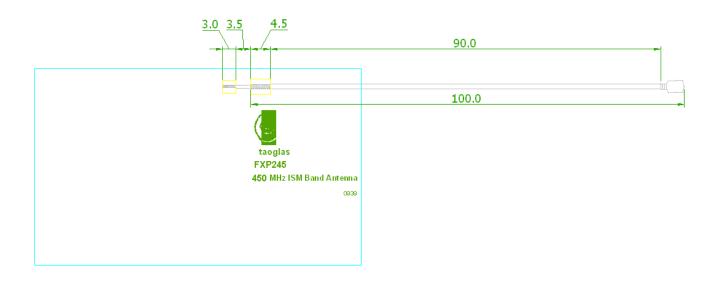

| VERSION | DATE       | PAGE | DESCRIPTION            | CENTRE | APPROVED         |
|---------|------------|------|------------------------|--------|------------------|
| A       | 09/21/2009 | All  | Antenna Specifications | Taiwan | Ruben F. Cuadras |

**Specification** 



#### I. OVERVIEW

The Taoglas FXP245 450 MHz ISM Antenna covers from 450-457 MHz used in the 450 MHz ISM (Industrial Scientific Medical) Band. The antenna has been designed in a flexible material with a square form-factor and cable connection for an easy installation. The antenna works on different plastic materials and thickness. We have selected a piece of ABS with 2 mm of thickness as a baseline for testing.

#### II. ANTENNA CHARACTERISTICS

| Parameter              | Specification           |  |  |
|------------------------|-------------------------|--|--|
| Frequency Range        | 450MHz to 457MHz        |  |  |
| Return Loss (dB)       | -20                     |  |  |
| Gain (dBi)             | 0                       |  |  |
| Impedance              | 50 Ω                    |  |  |
| VSWR                   | ≤2:1                    |  |  |
| Polarization           | Linear                  |  |  |
| Power Handled          | 5W                      |  |  |
| Operation Temperature  | -40°C ~ +85°C           |  |  |
| Storage Temperature    | -40°C ~ +85°C           |  |  |
| Dimensions             | 75*45*0.1mm             |  |  |
| Weight                 | 1.5g                    |  |  |
| Connector              | MHFII (U.FL Compatible) |  |  |
| Cable Standard         | Mini-Coax 1.13 mm       |  |  |
| Cable Length and color | 100mm, Black            |  |  |
| RoHS Compliant         | Yes                     |  |  |
| Adhesive               | 3M 467                  |  |  |



# III. TEST SET UP

# Rhode & Schwartz ZVL6 Vector Network Analyzer

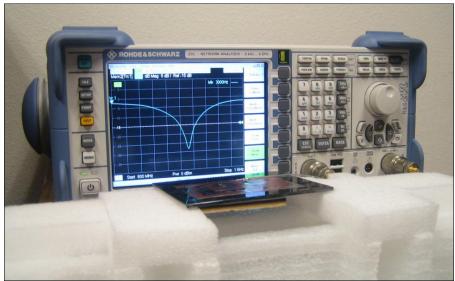


Figure 1. Network Analyzer.

**Specification** 



#### IV. ANTENNA PARAMETERS

The next antenna parameter graphs like Return Loss, VSWR and smith chart were measured in the Agilent Rhode & Schwartz ZVL6 Vector Network Analyzer.

## A. Return Loss Data

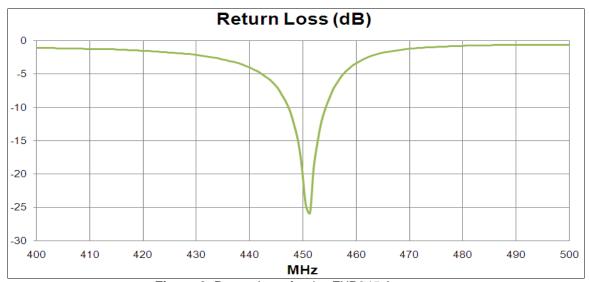


Figure 2. Return Loss for the FXP245 Antenna.

#### **B. VSWR Data**

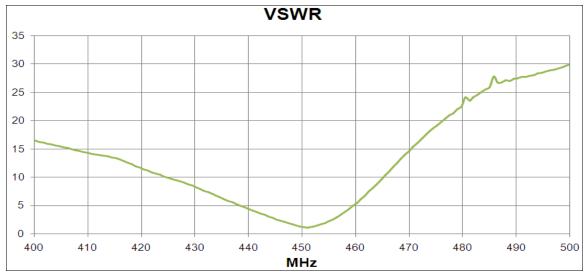


Figure 3. VSWR for the FXP245 Antenna.



### C. Smith Chart Data

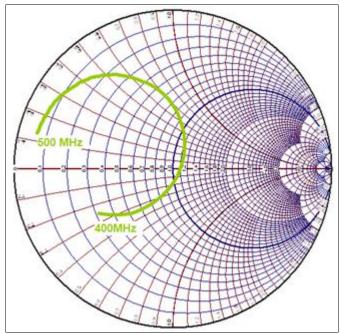


Figure 4. Smith Chart for the FXP245 Antenna.

#### V. MECHANICAL DRAWING 3.0 3.5 4.5 90.0 100.0 taoglas 45mm FXP245 450 MHz ISM Band Antenna Notes -1. 1.13 Mini-Coaxial Cable in colour black. 2. IPEX MHFII Connector. 75mm 3. Open/short test required. XXX $\pm 2.0$ PRODUCT NAME PART NO XX ±1.0 FXP245 FXP245 450 MHz ISM Band Antenna ±0.5 This drawing and its inherant design concepts are proeprty ±0.1 **REV** SCALE SHEET UNIT CUSTOMER of taoglas. It should not be copied or given to third parties 1 OF 1 without the written consent of taoglas. $\pm 0.05$ 1/1 A 4 taoglas mm

Figure 5. Mechanical Drawing for the FXP245 Antenna.

© All Rights Reserved
Taoglas Limited, Unit 3 Enniscorthy Technology Centre, Enniscorthy, Co. Wexford, Ireland
www.taoglas.com