

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		DATE	BY	APPD
H	-	F	LR			
		A1	ECR-10-026369	24DEC2010	MO	MO

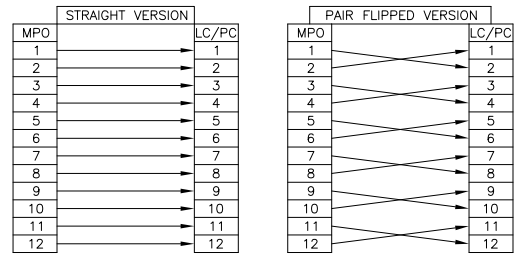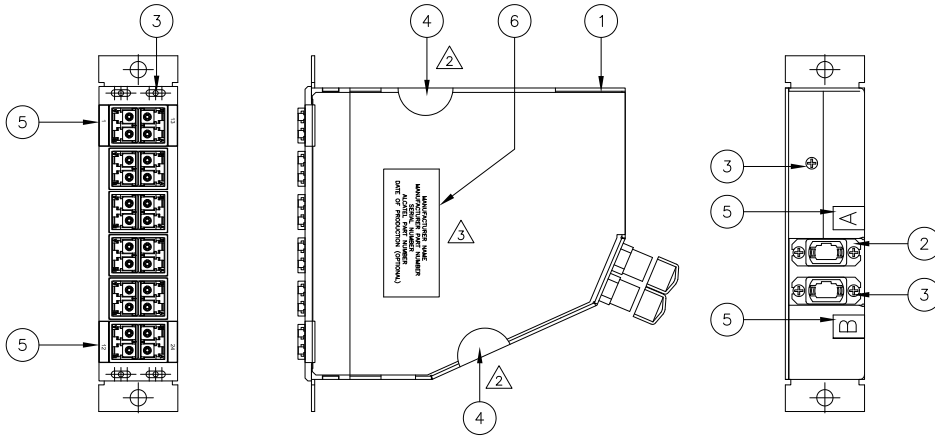

STRAIGHT VERSION		PAIR FLIPPED VERSION	
PART NUMBER	TYPE	PART NUMBER	TYPE
0-1920033-1	SM	0-1920033-2	SM
0-1920033-3	MM50	0-1920033-4	MM50
0-1920033-5	MM62.5	0-1920033-6	MM62.5
0-1920033-7	OM3	0-1920033-8	OM3

NOTES

1. LOSSES

FOR MM :CASSETTE LOSS ≤ 1,2 dB MEASURED AGAINST REF. CONN. AT 1300 nm
 (50/125) ACC. IEC 61300-3-4, CPR 16~16,5 dB
 RETURN LOSS ≥ 20 dB, MEASURED AGAINST REF. CONN. AT 1300 nm

FOR MM :CASSETTE LOSS ≤ 1,2 dB MEASURED AGAINST REF. CONN. AT 1300 nm
 (62,5/125) ACC. IEC 61300-3-4, CPR 21~22 dB
 RETURN LOSS ≥ 20 dB, MEASURED AGAINST REF. CONN. AT 1300 nm

FOR OM3: CASSETTE LOSS ≤ 1,2 dB MEASURED AGAINST REF. CONN. AT 1300 nm
 ACC. IEC 61300-3-4, CPR 16~16,5 dB
 RETURN LOSS ≥ 30 dB, MEASURED AGAINST REF. CONN. AT 1300 nm

FOR SM : CASSETTE LOSS ≤ 1,0 dB MEASURED AGAINST REF. CONN. AT 1310 nm
 RETURN LOSS ≥ 35 dB, MEASURED AGAINST REF. CONN. AT 1310 nm

WARRANTY VOID IF SEAL IS BROKEN

LABEL INFORMATION:

- MANUFACTURER NAME
- MANUFACTURER PART NUMBER
- SERIAL NUMBER
- DATE OF PRODUCTION

4. TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY

Qty	Description	Item
1	FOAC INFO LABEL	6
6	FOAC LABEL	5
2	FOAC WARRANTY LABEL	4
9	SCREW	3
2	MPO COUPLING BUSH	2
1	FOAC CONNECTOR MODULE BLACK	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW	R. COOLEN	18 MAR 08	Tyco Electronics Nederland BV
DIMENSIONS: mm		CHK	V. MEULEN	22 MAR 08	's-Hertogenbosch, Netherlands
TOLERANCES UNLESS OTHERWISE SPECIFIED:		T			
0 PLC	±	F	V. GEUN	22 MAR 08	NAME
1 PLC	±	PRODUCT SPEC:			FOCASS SM/MM50/MM62.5/OM3
2 PLC	±	APPLICATION SPEC:			2xMPO - 24xLC/PC
3 PLC	±	MATERIAL:			
4 PLC	±	FINISH:			
MATERIAL: -		SIZE: A2		CAGE CODE: 00779	DRAWING NO: 1920033
FINISH: -		CUSTOMER DRAWING		SCALE: NTS	SHEET: 1 OF 1
				RESTRICTED TO:	REV: A1