MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
2TL6 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN (5) KEYWAY SIDE (1-2,4-5)	CENTER (1-2,4-5)	OPPOSITE KEYWAY (2-3,5-6)	MILITARY RATING (AMPS) RESISTIVE LOAD DC VOLTS 28	125	250	AC VOLTS 125	250	LAMP LOAD 28 VDC	125 VAC	INDUCTIVE LOAD 28 VDC	125 VAC
2TL6-1	ON	OFF	ON									
2TL6-2	OFF	NONE	ON									
2TL6-3	ON	NONE	ON	20	.75	.5	15	6	7	4	15	15
2TL6-21	NONE	OFF	ON	(REFER TO L191 FOR UL RATING)								
2TL6-31	NONE	ON	ON									
2TL6-4	MOM OFF	NONE	ON									
2TL6-5	MOM ON	OFF	ON									
2TL6-6	MOM ON	NONE	OFF									
2TL6-7	MOM ON	OFF	MOM ON	18	.75	.5	11	6	5	2	10	8
2TL6-8	MOM ON	NONE	ON	(REFER TO L192 FOR UL RATING)								
2TL6-51	NONE	ON	MOM ON									
2TL6-61	MOM ON	OFF	NONE									

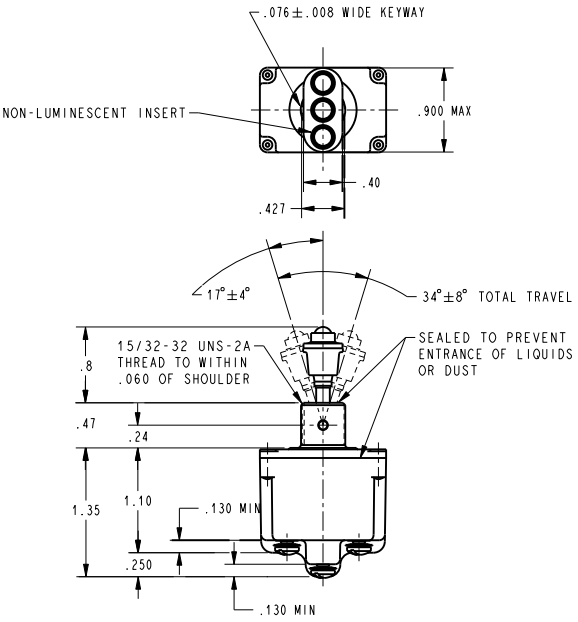

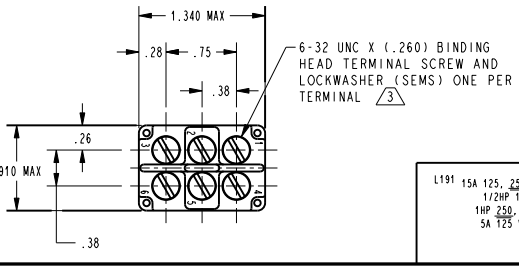

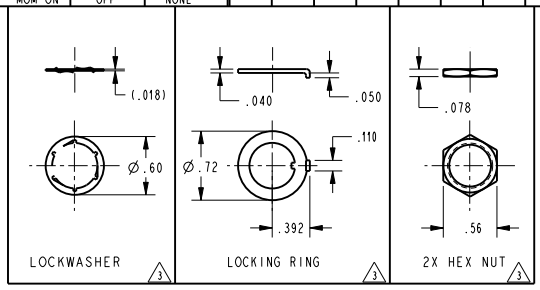

NOTES
1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
(3) FURNISHED UNASSEMBLED
4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8
(5) APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
6 - WHITE NON-FLUORESCENT CAP IS ATTACHED TO LEVER BY A LOCKING TYPE INTERNAL THREAD. LEVER CAP MAY BE REMOVED TO INSTALL SWITCH

ELECTRICAL DATA

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"

L192 10A 125, 250, 277 VAC
1/4HP 125 VAC
1/2HP 250, 277 VAC
3A 125 VAC "L"

THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .12 LB APPROX

ANSI Y14.5M-1982 APPLIES

CATALOG LISTING 2TL6 SERIES CHART 1 | PAGE 1 OF 1 | RELEASE NO. CO-32835 | REPLACES
ISSUE 8

REVISIONS					
A	CO-94438	S A V	23 NOV 99		
B	0003037	TSG	05 FEB 04		

PTC/CAD	2D	DRAWN	S A V	23 NOV 99	JAF	23 NOV 99	MDM	05 FEB 04	CHECK

Downloaded from Elcodis.com electronic components distributor