


## OPTO SWITCH - TRANSMISSIVE

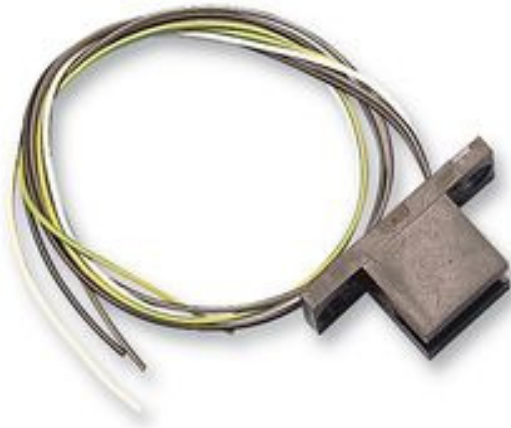

|  |            |
|--|------------|
| <b>Order Code:</b>                     | 121-9003   |
| <b>Manufacturer Part No:</b>           | STS-88-058 |
| <b>No. of Channels:</b>                | 1          |
| <b>Input Current:</b>                  | 50mA       |
| <b>Output Voltage:</b>                 | 30V        |
| <b>Current I<sub>x</sub>:</b>          | 200nA      |
| <b>Gap Width:</b>                      | 5.1mm      |
| <b>Max Output Voltage:</b>             | 30V        |
| <b>Max Voltage V<sub>ce Sat</sub>:</b> | 0.4V       |
| <b>On Current I<sub>c</sub>:</b>       | 400μA      |
| <b>Typ Voltage V<sub>f</sub>:</b>      | 2.4V       |
| <b>Max Reverse Leakage Current:</b>    | 100μA      |
| <b>Min Voltage B<sub>Vceo</sub>:</b>   | 30V        |
| <b>Min Voltage B<sub>Ve</sub>:</b>     | 5V         |
| <b>On Current I<sub>ce</sub>:</b>      | 100nA      |