
CQR INTERNAL SOUNDERS & SPEAKERS



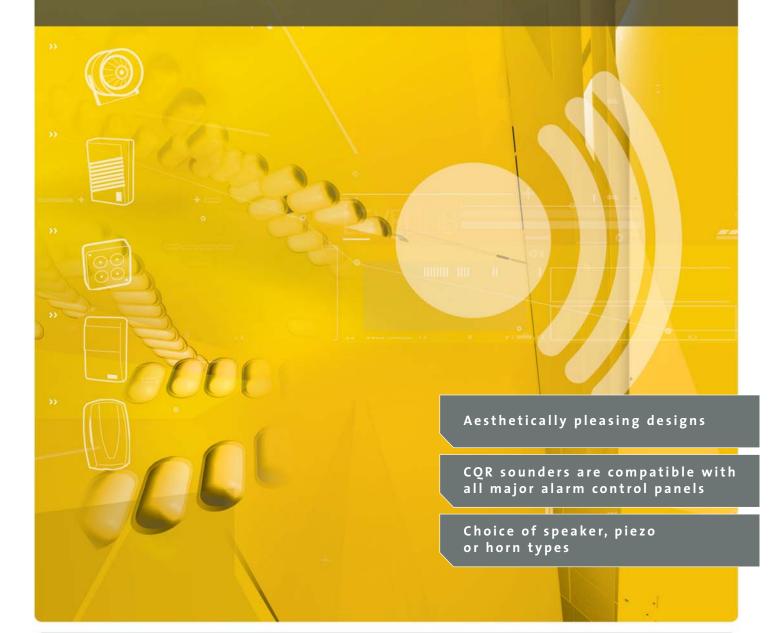

www.cqr.co.uk

INNOVATIVE SOLUTIONS

COR INTERNAL SOUNDERS & SPEAKERS



CQR is one of the major manufacturers of security products in the UK, and as a leading supplier to the European security industry, has consistently been at the forefront of traditional and new product development since opening for business way back in the early eighties.

The CQR brand is recognised worldwide and has become synonymous with quality and reliability. CQR branded products are all designed with ease of installation and use in mind and meet many product standards worldwide, including also full compliance to ISO 9001:2000.

Now part of the OSL Group, CQR continues to bring new products to market, backed up by a sales and support service, we believe is second to none.

This Technical Data Sheet reflects our 'modern' approach to our industry and provides you with all the information you need on this section of our extensive range.

All CQR's Internal Speakers & Sounders are designed for Consistency, Quality and Reliability. Their proven track record over many years means they can be fitted as part of any installation with confidence, ensuring that top quality, reliable products are consistent throughout the system.

The useful 'at a glance' tables on the back of this leaflet gives you all the performance data you need to choose the right component for the job.

All of CQR Internal Speakers and Sounders are available from a wide range of specialist security Distributors who ,together with our own technical back up, provide an excellent after-sales service as and when required.

However, should you require further information on any product in this leaflet, please give our Technical Support Team a call on +44(0)151 606 6311.





A sleek white low profile louvre-free housing containing just a speaker (SOINT1), or a sounder SOINT2, that will blend discreetly into any surrounding setting.

OPTIONS: SOINT 1/EC 16 Ohm speaker SOINT 1/16/WH 16 Ohm speaker, tampered SOINT 1/8/WH 8 Ohm speaker, tampered SOINT 2/WH Electronically driven speaker with SELECTABLE SOUND OUTPUT and LED indication



The same low profile housing containing a multi tone sounder, with separate inputs for exit time and alarm sound.

OPTIONS: SOINT 2/WH/HI-LO

110dB(A)300mA, TAMPERED

An attractive louvre-effect internal sounder whose two-piece housing clips together and is also available as either a speaker SOMACH1 or sounder SOMACH2.

OPTIONS: SOMACH1/WH/16 SOMACH1/WH/16/T SOMACH 1/WH/8 SOMACH1/WH/8/T SOMACH2/WH

16 Ohm speaker 16 Ohm speaker, tampered 8 Ohm speaker 8 Ohm speaker, tampered Electronically driven speaker with hi-warble 110dB(A) sound output



A fully functional sounder and strobe in miniature form which may be used internally and externally. It contains a 6V rechargeable battery and 20

minute cut-off timer.

AVAILABLE COLOURS: LENS COLOURS:



CODE: BCINTRA/W/COLOUR OF LENS

A range of piezo electronic sounders which allow you to select the right unit according to size, sounder output and current drain requirements. The Omega includes a separate strobe input





BUZZERS

SOSB2



A range of electro mechanical

numerous applications.

and piezo buzzers, miniature in size, suitable for



OMEGA

SO812



506012

SPEAKERS

A range of mylar cone loudspeakers in three different diameter sizes for use in alarm and other applications.

S0812/1C





SO66M



SO50M2

SO85M

BZ35/LS BZ27/LS BZ722

Downloaded from Elcodis.com electronic components distributor

plus tamper.



A range of horn sounders with different sound outputs and current consumption, suitable for use in internal and external applications



SOINT & SOINT2 HI-LO W: 100mm H: 155mm D: 48mm



SOMACH W: 100mm H: 160mm D: 70mm



INTRA W: 112mm H: 175mm D: 50mm



HORN SOUNDERS

BUZZERS



PIEZO SOUNDERS



SPEAKERS



CQR Security 125 Pasture Road, Moreton, Wirral United Kingdom, CH46 4TH Tel: +44(0)151 606 1000 Fax: +44(0)151 606 1122 Email: info@cqr.co.uk www.cqr.co.uk



INTERNAL SOUNDERS AT A GLANCE

	Soint EC	Soint1	Soint2	Soint Hi-Lo	Somach1	Somach 2	Intra
Sounder type	16 ohm speaker	8/16ohm speaker	16 ohm speaker	16 ohm speaker	8/16 ohm speaker	16 ohm speaker	Single piezo
Voltage	N/A	N/A	6 -15vdc	12 -15 vdc	N/A	6 -15 vdc	12 -15 vdc
Current	N/A	N/A	250mA	300mA - Hi 33 mA - Lo	N/A	240 mA	240 mA sounder 120 mA strobe
Sound output dB(A) at 1m	N/A	N/A	110	110 - Hi 90 - Lo	N/A	110	115
Frequency range	N/A	N/A	1.2 - 1.8 kHz	1.2 - 1.8 kHz	N/A	0.6 - 1.2 kHz	1.6 - 2.2 kHz
Timer	N/A	N/A	N/A	N/A	N/A	N/A	20min
Tamper protection	N/A	Wall/cover	Wall/cover	Wall/cover	Optional	Wall/cover	Wall/cover
Material	ABS	ABS	ABS	ABS	ABS	ABS	Polycarbonate
Visual indication	N/A	N/A	LED	LED	N/A	N/A	Strobe
SAB	N/A	N/A	N/A	N/A	N/A	N/A	Yes

HORN SOUNDERS AT A GLANCE

Voltage 6 -15 vdc 6 -15 vdc 6 -15 vdc Current 1.5A 300mA 650mA Sound output dB(A) at 1m 130 118 122 Frequency range 1.7 - 2.4kHz 0.6 1.2kHz 0.8 -1.7kHz Material ABS ABS ABS 1100gm 432gm 440gm Weight 127 x 100 Hom Dia 115 83x 96 Horn Dia 83 83x 96 Horn Dia 83 Size mm

BUZZERS AT A GLANCE

	BZ35/LS	BZ27/LS	BZ722
Voltage	3 -24 vdc	3 -24 vdc	9 -15 vdc
Current	15 mA	12mA	25mA
Sound output dB(A) at 1m	100	75	75
Frequency range	3.3kHz	2.6kHz	400Hz
Material	ABS	ABS	ABS
Size mm	26 x 39 Dia	14 x 32 Dia	23 x 17 x 27

SPEAKERS AT A GLANCE

	SO5OM2	SO66M	SO85M
ОНМ	8	8	8/16
Max power (W)	2	3	12
Frequency range	3kHz	4.5kHz	5kHz
Material	Mylar	Mylar	Mylar
Size mm	50 Dia x 20	66 Dia x 20	87x87x35

PIEZO SOUNDERS AT A GLANCE

	SOSB1	SOSB2	SO401	Omega
Voltage	6 -15 vdc	6 -15 vdc	6 -15 vdc	12 vdc
Sounder Current	85mA	190mA	160mA	120mA
Sound output dB(A) at 1m	109	111	109	110/95
Frequency range	1.7 - 2.4kHz	0.6 1.2kHz	2.3 - 2.8kHz	1.5 - 2.8 kHz
Strobe	N/A	N/A	N/A	Yes
Strobe Current	N/A	N/A	N/A	120mA
Material	ABS	ABS	ABS	Polystyrene
Size mm	115x55x33	106x106x34	60x45x40	133 Dia x 40

DATA SHEETS ALSO AVAILABLE:

Cable & door loops

Detection External sounders

Emergency switches & accessories

Freewave - wirefree system

Hydrosure - fall detection for swimming pools & ponds

distributed by:

