


## FLASHING FILAMENT AUDIBLE BEACONS



Code No:	Voltage:	Light Source:	Current:
FFA125-80	12v Dc ---	Ba15d x 21w	1.80 A
FFA125-81	24v Dc ---	Ba15d x 21w	0.90 A
FFA125-82	115v Ac ~	Ba15d x 15w	0.15 A
FFA125-83	230v Ac ~	Ba15d x 15w	0.08 A

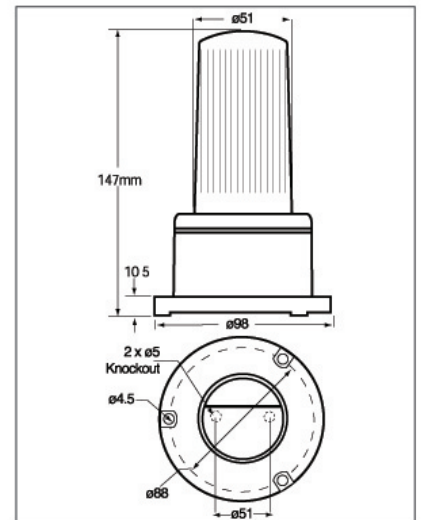

01 02 03 04 05

f.p.m. 60

C -25+66

IP 65

50/60 Hz

Kg 0.25

dB 85

**MOFLASH**  
**SIGNALLING LTD**

Unit 18, Klaxon Industrial Estate  
Warwick Road, Tyseley,  
Birmingham B11 2HA  
England

E mail: sales@moflash.co.uk  
Web: http://www.moflash.co.uk  
Tel: ++44 (0) 121 707 6681  
Fax: ++44 (0) 121 707 8305