



DESCRIPTION	DATA SHEET FOR COPPER TUBE TERMINALS AS SUPPLIED TO, FARNELL	QUALITY SYSTEM NO: D A V 1 2 7 8
DISTRIBUTION	MANAGING DIRECTOR	SHEET 1 of 2
SALES DIRECTOR.	INSPECTION REPRESENTATIVE	ISSUE DATE 27-2-93
TEST. STORES	DAVICO	SIGNED. 

FINISH
ELECTRO TINNED
TO BS 1872 (1984)


COPPER CONDUCTIVITY
TO 99.9% I.A.C.S.
COPPER TO BS 6017 (1981)
and BS 1977 (1976)

ALL COPPER TUBE TERMINALS HAVE A RADIUSSED ENTRY

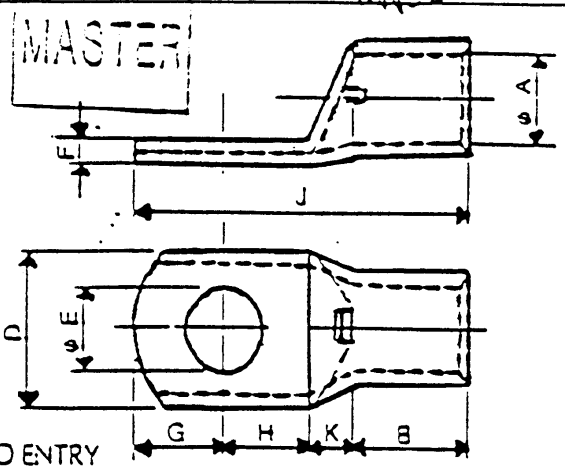

DAVICO PART NUMBER	FARNELL PART NUMBER	SQ MM	A	B	D	E	F	G	H	J	K	SID SIZE MM DIA
D 6-5	269.074	4.6	3.8	9	10	5.2	1.2	5	6	23	3	5
D 6-6	269.086	4.6	3.8	9	12	6.5	1.0	6	9	27	3	6
D 10-5	268.938	10.0	4.5	9	12	5.2	1.2	6	7	25	3	5
D 10-6	268.940	10.0	4.5	9	12	6.5	1.2	6	7	25	3	6
D 10-8	268.951	10.0	4.5	9	12	8.4	1.2	6	7	25	3	8
D 16-6	268.975	16.0	5.4	12	12	6.5	1.4	7	7	30	4	6
D 16-8	268.987	16.0	5.4	12	12	8.4	1.4	7	9	32	4	8
D 25-6	268.999	25.0	6.8	12	13	6.5	2.0	7	7	30	4	6
D 25-8	269.001	25.0	6.8	12	61	8.4	1.6	10	11	37	4	8
D 25-10	269.013	25.0	6.8	12	16	10.5	1.6	10	11	37	4	10

DAVICO
Keeping electricity firmly in its place

REV 1	DATE 15-3-93	Supersedes DAV1228	SIG 
REV 2	DATE		SIG

