

### Description

- For 1/4" x 1-1/4" (6.35mm x 31.8mm) fuses
- Waterproof for exposed locations
- Accepts #16 to #12 copper wire
- Copper crimp lead material
- Recommended crimp tools:
  - Thomas & Betts – WT-112M
  - Thomas & Betts – ERG-2002
  - Channelock No. 909
- High temperature, flame retardant, phenolic meets UL 94 HB
- Crimp or 1/4" quick connect terminals
- In-line connection

### Agency Information

- UL Recognized: (IZLT2, E14853) HFA recognized with use of No. 12 AWG copper conductors secured with Thomas & Betts crimping tool WT-180
- HFA-HH not UL Recognized

### Environmental Data

- Temperature Rating (RTI): 150°C


### Ordering

- Specify packaging, product, and option code



### Dimensions

Drawing Not to Scale

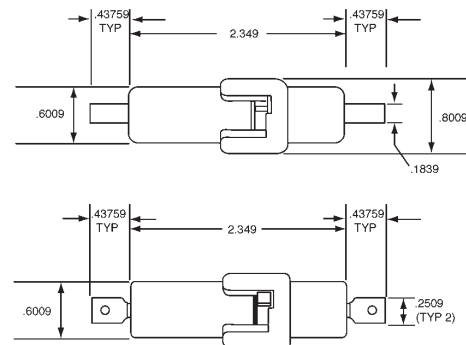

Component	Material
Body	Phenolic
Crimp	Copper, Tin-Plated

SPECIFICATIONS			
Product Code	Voltage Rating	Current Rating	Terminal
HFA	250V	20A	Crimp
HFA-HH	250V	20A	1/4 Quick Connect

PACKAGING CODE	
Packaging Code	Description
Blank	10 pieces of fuseholders packed into a carton
BK	20 pieces of fuseholders packed into a carton

OPTION CODE	
Option Code	Description
-R	RoHS compliant version

#### North America

Cooper Electronic Technologies  
 1225 Broken Sound Parkway NW  
 Suite F  
 Boca Raton, FL 33487-3533  
 Tel: 1-561-998-4100  
 Fax: 1-561-241-6640  
 Toll Free: 1-888-414-2645

Cooper Bussmann  
 P.O. Box 14460  
 St. Louis, MO 63178-4460  
 Tel: 1-636-394-2877  
 Fax: 1-800-544-2570

#### Europe

Cooper Electronic Technologies  
 Cooper (UK) Limited  
 Burton-on-the-Wolds  
 Leicestershire • LE12 5TH UK  
 Tel: +44 (0) 1509 882 737  
 Fax: +44 (0) 1509 882 786

Cooper Electronic Technologies  
 Avda. Santa Eulalia, 290  
 08223  
 Terrassa, (Barcelona), Spain  
 Tel: +34 937 362 812  
 +34 937 362 813  
 Fax: +34 937 362 719

#### Asia Pacific

Cooper Electronic Technologies  
 1 Jalan Kilang Timor  
 #06-01 Pacific Tech Centre  
 Singapore 159303  
 Tel: +65 278 6151  
 Fax: +65 270 4160