




### IBM 3270 Baluns

### Product Facts

:: These baluns are compatible with IBM 3270 and 3174 Category A devices

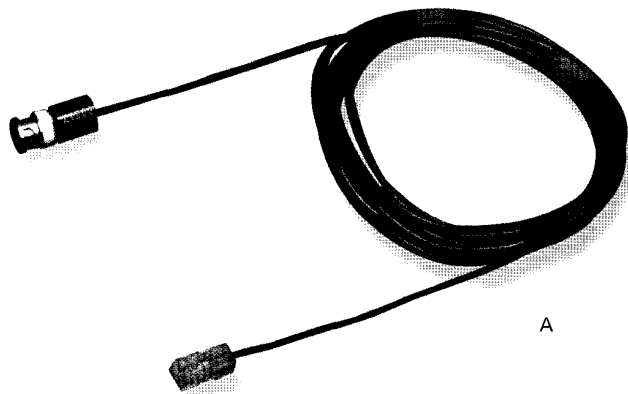

A



B

#### RJ45 to BNC Plug

| Description   | Figure | Active Pin Numbers | Part Number |
|---|--------|--------------------|-------------|
| RJ45 Plug (8-pos.) to BNC Plug with 14ft Twisted Pair Cable | A      | 4 & 5              | 555242-1    |
|   |        | 1 & 2              | 555242-2    |
| RJ45 Jack to BNC Plug                                       | B      | 4 & 5              | 555330-1    |
|   |        | 1 & 2              | 555330-2    |


#### RJ11 to BNC Plug

| Description   | Figure | Active Pin Numbers | Part Number |
|---|--------|--------------------|-------------|
| RJ11 Plug (6-pos.) to BNC Plug with 14ft Twisted Pair Cable | A      | 3 & 4              | 555195-1    |
| RJ11 Jack to BNC Plug                                       | B      | 3 & 4              | 555329-1    |

3.2



CONNECTORS, COUPLERS AND ADAPTERS

### 4-Position Data Connector to Modular Jack Adapters



ATM/TP-PMD

Token Ring Wiring



| Interface Type          | Wiring     | Part Number |
|-------------------------|------------|-------------|
| 8-Position Modular Jack | ATM/TP-PMD | 555414-1    |
|                         | Token Ring | 555414-2    |

60

.....  
For more information, call 1-800-553-0938