

### Description

#### TDC10


- Fast Acting
- 1/4" x 1-1/4" physical size
- Glass tube, electroplated brass endcap construction
- Interrupting rating equals 10 times rated current
- Designed to British Standard BS2950A

#### TDC11


- Time Delay
- 1/4" x 1-1/4" physical size
- Glass tube, electroplated brass endcap construction
- Interrupting rating equals 10 times rated current

### Ordering

- Specify packaging and product code

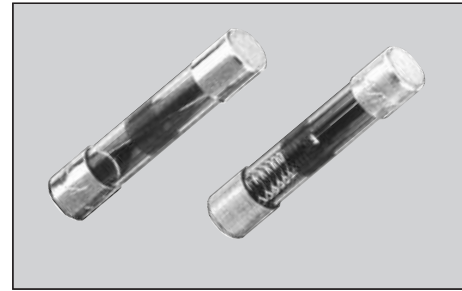

Dimensions <sup>mm/(inches)</sup>

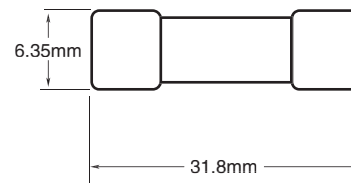

### SPECIFICATIONS - TDC10

Product Code	Voltage Rating AC	Interrupting Rating*							
		1000V	750V	500V	350V	250V	150V	100V	32V
TDC10-50MA	1000V	500MA	-	-	-	-	-	-	-
TDC10-60MA	1000V	600MA	-	-	-	-	-	-	-
TDC10-100MA	1000V	1A	-	-	-	-	-	-	-
TDC10-150MA	1000V	1.5A	-	-	-	-	-	-	-
TDC10-250MA	1000V	2.5A	-	-	-	-	-	-	-
TDC10-500MA	750V	-	5A	-	-	-	-	-	-
TDC10-750MA	500V	-	-	7.5A	-	-	-	-	-
TDC10-1A	350V	-	-	-	10A	-	-	-	-
TDC10-1.5A	250V	-	-	-	-	15A	-	-	-
TDC10-2A	250V	-	-	-	-	20A	-	-	-
TDC10-3A	250V	-	-	-	-	30A	-	-	-
TDC10-5A	250V	-	-	-	-	50A	-	-	-
TDC10-7A	150V	-	-	-	-	-	70A	-	-
TDC10-10A	100V	-	-	-	-	-	-	100A	-
TDC10-12A	32V	-	-	-	-	-	-	-	120A
TDC10-15A	32V	-	-	-	-	-	-	-	150A
TDC10-20A	32V	-	-	-	-	-	-	-	200A
TDC10-25A	32V	-	-	-	-	-	-	-	250A



### SPECIFICATIONS - TDC11

Product Code	Voltage Rating AC	Interrupting Rating*						
		1000V	750V	500V	350V	250V	150V	100V
TDC11-50MA	1000V	500MA	-	-	-	-	-	-
TDC11-60MA	1000V	600MA	-	-	-	-	-	-
TDC11-100MA	1000V	1A	-	-	-	-	-	-
TDC11-150MA	1000V	1.5A	-	-	-	-	-	-
TDC11-250MA	1000V	2.5A	-	-	-	-	-	-
TDC11-500MA	750V	-	5A	-	-	-	-	-
TDC11-750MA	500V	-	-	7.5A	-	-	-	-
TDC11-1A	350V	-	-	-	10A	-	-	-
TDC11-1.5A	250V	-	-	-	-	15A	-	-
TDC11-2A	250V	-	-	-	-	20A	-	-
TDC11-3A	250V	-	-	-	-	30A	-	-
TDC11-5A	250V	-	-	-	-	50A	-	-
TDC11-7A	150V	-	-	-	-	-	70A	-
TDC11-10A	100V	-	-	-	-	-	-	100A

\* Interrupting Rating: Interrupting rating is 10 times the rated current.

\*\* DC Cold Resistance (Measured at <10% of rated current)

**TIME CURRENT CURVE**

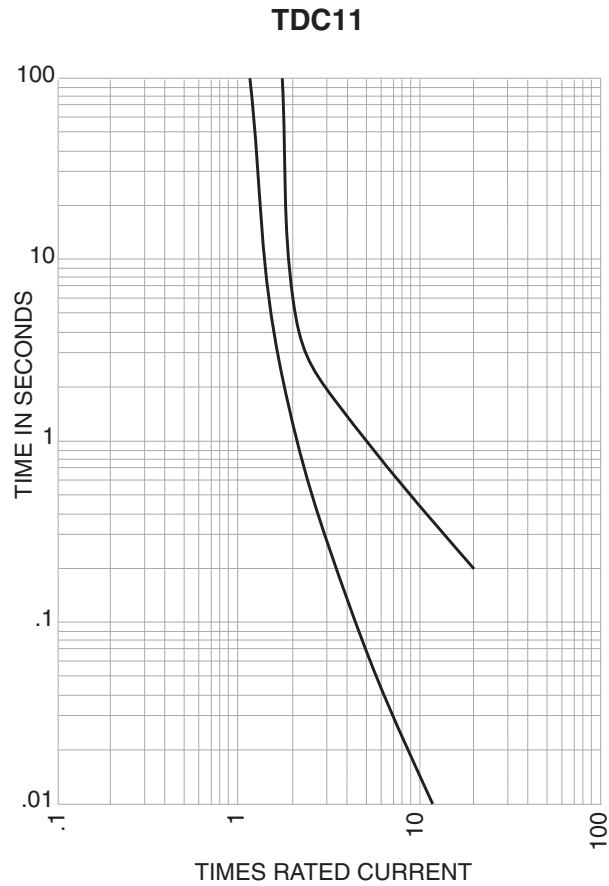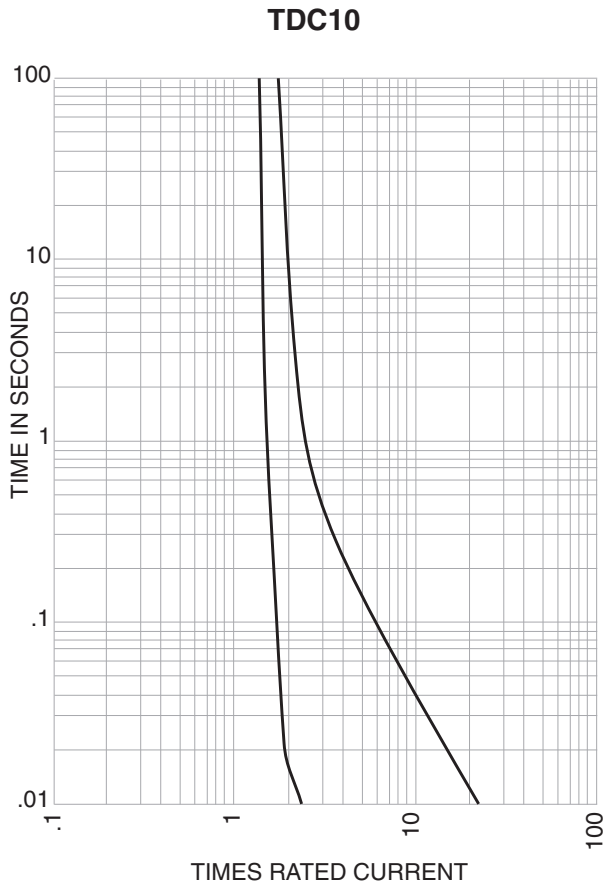

PACKAGING CODE	
Packaging Code	Description
<b>BK</b>	100 pieces of fuses packed into a cardboard carton
<b>BK1</b>	1,000 pieces of fuses packed into a cardboard carton