



### ■ Features :


- Universal AC input / Full range
- Protections: Short circuit / Over load / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty



### SPECIFICATION

MODEL	NET-35A			NET-35B			NET-35C			NET-35D			
OUTPUT NUMBER	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	
<b>OUTPUT</b>	<b>DC VOLTAGE</b>	5V	12V	-5V	5V	12V	-12V	5V	15V	-15V	5V	24V	12V
	<b>RATED CURRENT</b>	3A	1A	0.5A	3A	1A	0.5A	2.5A	1A	0.5A	2.5A	0.5A	1A
	<b>CURRENT RANGE</b> <small>Note.6</small>	0.5 ~ 4A	0.1 ~ 1.5A	0.1 ~ 0.5A	0.5 ~ 4A	0.1 ~ 1.5A	0.1 ~ 0.5A	0.5 ~ 3.5A	0.1 ~ 1.5A	0.1 ~ 0.5A	0.5 ~ 3.5A	0.1 ~ 1A	0.1 ~ 1A
	<b>RATED POWER</b>	29.5W			33W			35W			36.5W		
	<b>RIPPLE &amp; NOISE (max.)</b> <small>Note.2</small>	80mVp-p	120mVp-p	120mVp-p	80mVp-p	120mVp-p	120mVp-p	80mVp-p	150mVp-p	150mVp-p	80mVp-p	200mVp-p	120mVp-p
	<b>VOLTAGE ADJ. RANGE</b>	CH1: 4.75 ~ 5.5V			CH1: 4.75 ~ 5.5V			CH1: 4.75 ~ 5.5V			CH1: 4.75 ~ 5.5V		
	<b>VOLTAGE TOLERANCE</b> <small>Note.3</small>	±2.0%	±6.0%	±6.0%	±2.0%	±6.0%	±6.0%	±2.0%	±8.0%	±8.0%	±2.0%	±8.0%	±8.0%
	<b>LINE REGULATION</b> <small>Note.4</small>	±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%
	<b>LOAD REGULATION</b> <small>Note.5</small>	±1.5%	±3.0%	±3.0%	±1.5%	±3.0%	±3.0%	±1.5%	±3.0%	±3.0%	±1.5%	±3.0%	±3.0%
	<b>SETUP, RISE TIME</b>	500ms, 30ms/230VAC			1200ms, 30ms/115VAC at full load								
	<b>HOLD UP TIME (Typ.)</b>	50ms/230VAC			10ms/115VAC at full load								
<b>INPUT</b>	<b>VOLTAGE RANGE</b>	85 ~ 264VAC			120 ~ 370VDC								
	<b>FREQUENCY RANGE</b>	47 ~ 63Hz											
	<b>EFFICIENCY (Typ.)</b>	78%			79%			79%			79%		
	<b>AC CURRENT (Typ.)</b>	0.75A/115VAC			0.5A/230VAC								
	<b>INRUSH CURRENT (Typ.)</b>	COLD START 45A											
	<b>LEAKAGE CURRENT</b>	<2mA / 240VAC											
<b>PROTECTION</b>	<b>OVERLOAD</b>	110 ~ 150% rated output power			Protection type : Hiccup mode, recovers automatically after fault condition is removed								
	<b>OVER VOLTAGE</b>	CH1: 5.75 ~ 6.75V			Protection type : Shut down o/p voltage, re-power on to recover								
<b>ENVIRONMENT</b>	<b>WORKING TEMP.</b>	-20 ~ +60°C (Refer to output load derating curve)											
	<b>WORKING HUMIDITY</b>	20 ~ 90% RH non-condensing											
	<b>STORAGE TEMP., HUMIDITY</b>	-40 ~ +85°C, 10 ~ 95% RH											
	<b>TEMP. COEFFICIENT</b>	±0.03%/°C (0 ~ 45°C)											
	<b>VIBRATION</b>	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes											
<b>SAFETY &amp; EMC (Note 7)</b>	<b>SAFETY STANDARDS</b>	UL60950-1, CB(IEC60950-1) approved											
	<b>WITHSTAND VOLTAGE</b>	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC											
	<b>ISOLATION RESISTANCE</b>	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH											
	<b>EMI CONDUCTION &amp; RADIATION</b>	Compliance to EN55022 (CISPR22) Class B											
	<b>HARMONIC CURRENT</b>	Compliance to EN61000-3-2,-3											
	<b>EMS IMMUNITY</b>	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, ENV50204, EN55024, EN61000-6-1, light industry level, criteria A											
<b>OTHERS</b>	<b>MTBF</b>	386.2Khrs min. MIL-HDBK-217F (25°C)											
	<b>DIMENSION</b>	99*97*36mm (L*W*H)											
	<b>PACKING</b>	0.36Kg; 45pcs/17.2Kg/0.93CUFT											
<b>NOTE</b>	<ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF &amp; 47uF parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. Line regulation is measured from low line to high line at rated load.</li> <li>5. Load regulation is measured from 20% to 100% rated load, and other output at 60% rated load.</li> <li>6. Each output can work within current range. But total output power can't exceed rated output power.</li> <li>7. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a>)</li> </ol>												


### Mechanical Specification

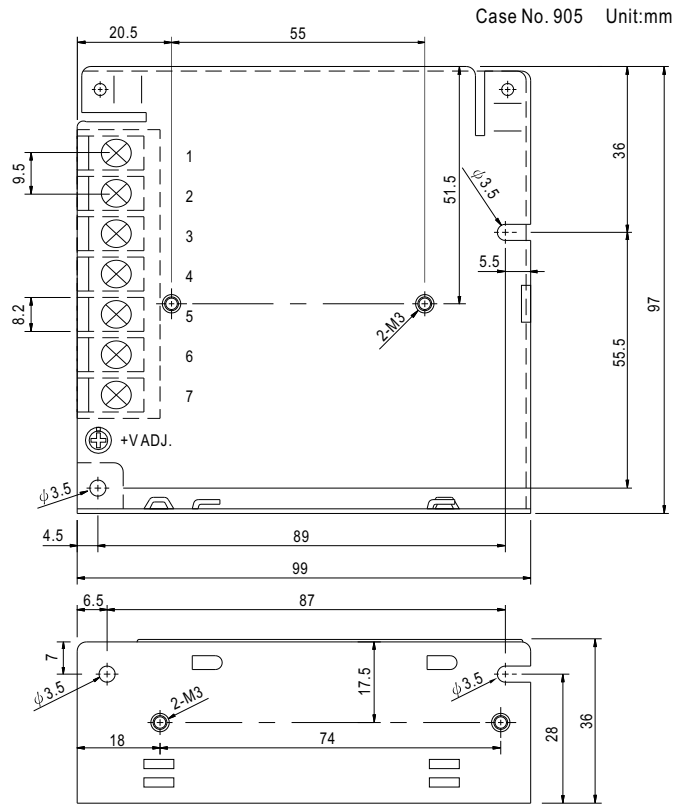


Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	5	DC OUTPUT +V2
2	AC/N	6	DC OUTPUT COM
3	FG $\perp$	7	DC OUTPUT +V1
4	DC OUTPUT V3		

### Block Diagram

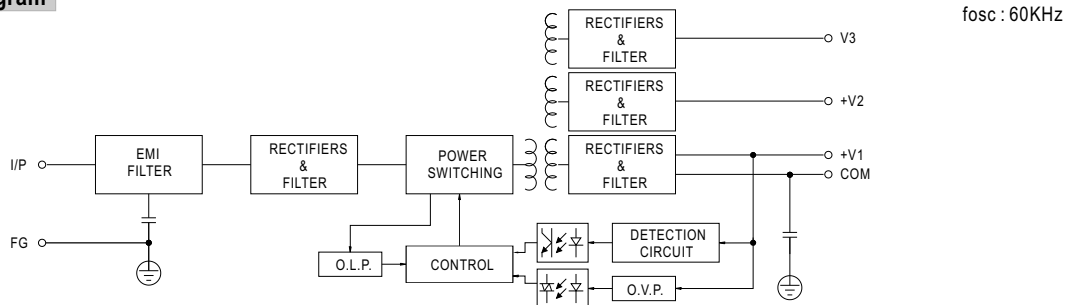

### Derating Curve

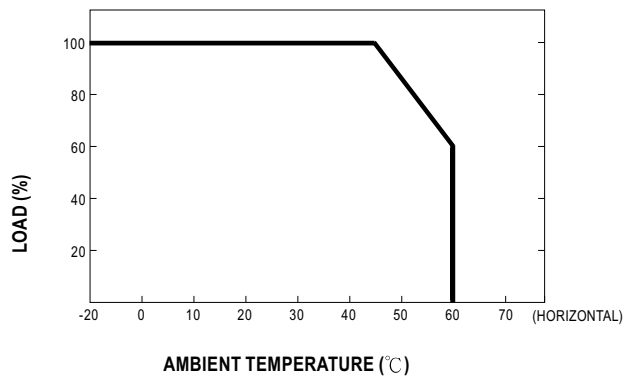

### Output Derating VS Input Voltage

