Set Points from 10-400 psi 5000 Series Ultra Duty Pressure Switch

Honeywell Sensing and Control has designed a high pressure/low set point pressure switch for applications that see sudden pressure spikes and high system pressures that can result in early switch failures. This series has been strengthened to prevent cracking of the base with plated steel and screw machined components in a 3-piece design. Modifications to the effective area of the pressure cavity and size of the diaphragm button and diaphragm o-ring are what makes the switch capable of handling sudden pressure transients and high system pressures that are common in applications such as braking, transmission and hydraulic systems.

The switch's physical appearance is similar to our 5000 Series switches with a height of only 2.3" (approx) and a diameter of 1.47". In comparison to our 5000 Series Switch the burst rating has significantly increased from 1250 psi to over 4000 psi on the new design.

Specifications

Type: Direct action blade contact Contacts: Silver alloy, gold plated Set Point Range: 10-400 PSI **Operating Pressure: 500 PSI** Proof Pressure: 2000 PSI Burst Pressure: 4000 PSI Base: Plated Steel — Screw Machined 3-piece construction Diaphragm: Polymide Film Connector: 1/8-27 NPT Male Thread Temperature Range: -40°F to +250°F Terminals: #8-32 screws, 1/4" blade, 280 Series Metripack Circuitry: SPST-N.O., N.C., SPDT Cover: Glass Reinforced Polyester Options: Base connector sizes, wire leads, N.O./N.O. dual circuit and N.C./N.C. dual circuit.

Ratings:

Resistive:	15	AMP-	6	VDC
	8	AMP-	12	VDC
	4	AMP-	24	VDC
Inductive:	1	AMP-	120	VAC
	0.5	AMP-	240	VAC


Approximate Dead Band Standard Switches						
Contact Setting	Dead Band					
10-35 PSI	15-25 PSI					
35-75 PSI	25-35 PSI					
75-150 PSI	40-60 PSI					
150-250 PSI	50-70 PSI					
250-400 PSI	80-100 PSI					

	5000 Series Ultra Duty Pressure Switches			2 Terminals		Metri-Pack Integral Connector (See Note 1)				
Contact Setting	Factory Set At	Circuitry	Screw Part #	Blade Part #	Contact Setting	Factory Set At	Circuitry	Part #		
		N.O.	83298	83313			N.O.	83328		
		N.C.	83299	83314	10.00 001		N.C.	83329		
10-35 PSI ±4 psi	20 PSI	DC*	83300	83315	10-30 PSI ± 4 psi	20 PSI	DC*	83330		
		N.O.	83301	83316			N.O.	83331		
		N.C.	83302	83317			N.C.	83332		
35-75 PSI ± 6 psi	60 PSI	DC*	83303	83318	30-65 PSI ± 5 psi	45 PSI	DC*	83333		
		N.O.	83304	83319		85 PSI	N.O.	83334		
75 4 50 501		N.C.	83305	83320			N.C.	83335		
75-150 PSI ±10 psi	100 PSI	DC*	83306	83321	65-125 PSI ± 7 psi		DC*	83336		
		N.O.	83307	83322			N.O.	83337		
150 050 001		N.C.	83308	83323	105 000 001		N.C.	83338		
150-250 PSI ± 15 psi	200 PSI	DC*	83309	83324	125-200 PSI ± 10 psi	165 PSI	DC*	83339		
		N.O.	83310	83325			N.O.	83340		
0.50 (00 00)		N.C.	83311	83326		000 001	N.C.	83341		
250-400 PSI ± 20 psi	300 PSI	DC*	83312	83327	200-400 PSI ± 15 psi	300 PSI	DC*	83342		

Metri-Pack Switches								
10-30 PSI	20-35 PSI							
30-65 PSI	35-55 PSI							
65-125 PSI	60-85 PSI							
125-200 PSI	85-115 PSI							
200-400 PSI	150-200 PSI							

Note 1: Mating connector for N.O. and N.C. is Packard Part# 15300027; Mating connector for DC is Packard Part# 12034147.

DC*- The N.C. is the reference circuit for the DC Switch; the N.O. circuit is not adjusted. The approximate dead band between the N.C. and N.O. circuit is shown in the charts. For applications requiring the N.O. circuit as the reference circuit, the N.C. circuit is not adjusted.

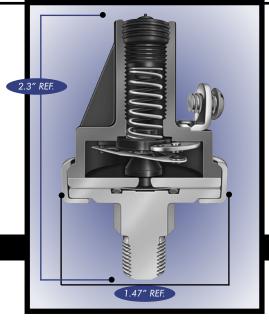

Set Points from 0.5 to 150 psi 5000 Series Extended Duty Pressure Switch With Direct Action Blade Contacts


Standard Specifications

The 5000 Series switch is specifically designed to stand up to extended duty applications. This switch is factory set but capable of field adjustment. It features a Kapton diaphragm for compatibility with a wide variety of fluids, and various terminations including a Metri-Pack connector that forms a tight seal when connected. Among the outstanding design benefits are its durable construction, compact size, and enhanced set point integrity.

Type:	Direct action
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	blade contact
Contacts:	Silver alloy,
	gold plated
Set Point:	Factory set
	from 0.5 to 150 PSI
Operating F	Pressure:
150 PSI for	0.5-24 PSI set point range,
250 PSI for	25-150 PSI set point range
Proof Pressu	ire: 500 PSI
Burst Pressu	re: 750 PSI for 0.5-24 PSI
	set point range

1250 PSI for 25-150 PSI set point range.

R

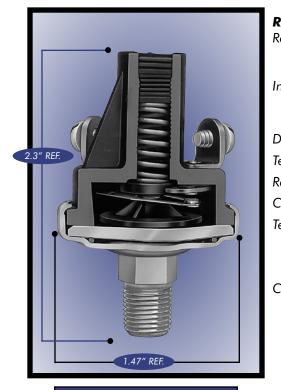


5000 Series Switch with Screw Terminals

		6	VDC			
-						
4				2.9		
).5		. – .	VAC			
_						
	lyimide	film				
-4	0° F to	+ 250	° F			
1/3	8 -27 N	IPT ma	le three	bc		
#8-32 screws,						
1/	4″ blac	le,				
28	0 Serie	s Metri	i-Pack			
SP	st-n.o	., N.C.	,			
1	circuit c	adjusta	ble duc	ıl		
cir	cuit, or	2 circu	uits			
ad	ljustable	e dual	circuit.			
Als	so avail	able a	re			
N.	0./N.C). dual	circuit			
an	d N.C.	/N.C. (dual cir	cuit.		
Plated Steel						
Glass reinforced polyester						
Brass, plastic or stainless						
steel base; various base						
со	nnector	thread	d sizes;			
wire leads (potted & sealed).						
	8 4 1).5 Po -4 1/3 #8 1/ 28 SP 1/ 28 SP 1/ 28 SP 1/ 28 SP 1/ 28 SP 1/ 3 Cir ad Als SP 5 Cir ad Bra ST 6 Cir ST 6 Cir S	 D.5 AMP- Polyimide -40° F to 1/8 -27 N #8-32 sc 1/4" blac 280 Serie SPST-N.O 1 circuit or adjustable Also avail N.O./N.C and N.C., Plated Stee Glass reir Brass, plo steel base connector 	8 AMP- 12 4 AMP- 24 1 AMP- 120 D.5 AMP- 240 Polyimide film -40° F to + 250 1/8 -27 NPT ma #8-32 screws, 1/4" blade, 280 Series Metri SPST-N.O., N.C. 1 circuit adjusta circuit, or 2 circu adjustable dual Also available a N.O./N.O. dual and N.C./N.C. o Plated Steel Glass reinforced Brass, plastic or steel base; vario connector thread	8 AMP- 12 VDC 4 AMP- 24 VDC 1 AMP- 120 VAC 0.5 AMP- 240 VAC Polyimide film -40° F to + 250° F 1/8 -27 NPT male threa #8-32 screws, 1/4" blade, 280 Series Metri-Pack SPST-N.O., N.C., 1 circuit adjustable duc circuit, or 2 circuits adjustable dual circuit. Also available are N.O./N.O. dual circuit and N.C./N.C. dual circuit and N.C./N.C. dual circuit Steel Steel Glass reinforced polyes Brass, plastic or stainles steel base; various base connector thread sizes;		



Switch Boot P/N 79380 for Vacuum and Pressure

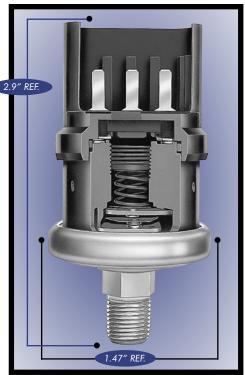

5000 Series Switch with Metri-Pack Terminal

NOTE: OPERATING MEDIA (PRESSURE SWITCH) The pressure switch is designed to operate with air, motor oils, transmission oils, jet fuels and other similar hydrocarbon media.

	5000 Series Pressure Switch With Standard Terminal										
			Single Circuit 1 Terminal		Single Circuit 2 Terminals		Dual Circuit One circuit adjustable ¹		Dual Circuit Both circuits adjustable ²		ole ²
Contact	Factory	Circuitry	Part N	umber	Part N	umber	Part N	lumber	Contact	Part N	lumber
Setting	Set At	Circonity	Screw	Blade	Screw	Blade	Screw	Blade	Setting ³	Screw	Blade
0.5-1 PSI	1 PSI	N.O.	78630	78631	78628	78629	70711	70710	3-4 PSI	76081	76086
±0.3	1131	N.C.	78634	78635	78632	78633	78711	78712	±0.5	70001	70000
1.1-3 PSI	2 PSI	N.O.	78142	78399	76051	76056	7/071	7/07/	5-8 PSI	76582	76590
±0.5	2131	N.C.	78149	78406	76061	76066	76071	76076	±1	70302	70370
3.1-7 PSI	4 PSI	N.O.	78143	78400	76575	76583	7/570	7/507	9-24 PSI	76082	76087
±1	4151	N.C.	78150	78407	76577	76585	76579	76587	±2	70002	/000/
8-13 PSI	10 PSI	N.O.	78144	78401	76576	76584	7/500	7/500	25-50 PSI	76083	76088
±2	10131	N.C.	78151	78408	76578	76586	76580	76588	±3	70005	70000
14-24 PSI	15 PSI	N.O.	78145	78402	76052	76057	7/070	7/077	51-90 PSI	76084	76089
±3	13131	N.C.	78152	78409	76062	76067	76072	76077	+5/-2	70004	/000/
25-50 PSI	35 PSI	N.O.	78146	78403	76053	76058	7/070	7/070	91-150 PSI	76085	76090
±5	55151	N.C.	78153	78410	76063	76068	76073	76078	+8/-2	70005	/00/0
51-90 PSI	60 PSI	N.O.	78147	78404	76054	76059	7/07/	7/070			
±7	00131	N.C.	78154	78411	76064	76069	76074	76079			
91-150PSI	100 PSI	N.O.	78148	78405	76055	76060	7/075	7/000			
±10	100131	N.C.	78155	78412	76065	76070	76075	76080			

5000 Series Pressure Switch With Metri-Pack Terminal

	(Ma		Single Circuit ates with Packard /N 15300027)	Dual Circuit One circuit adjustable (Mates with Packard P/N 12034147)			
Contact Setting	Factory Set At	Circuitry	Part Number	Part Number	/	Contact Setting ³	Part Number
1-3 PSI ±0.5	2 PSI	N.O. N.C.	77029 77020	77038		3-4 PSI ±0.5	77047
4-6 PSI ±1	5 PSI	N.O. N.C.	77030 77021	77039		5-10 PSI ±1	77048
7-12 PSI ±2	10 PSI	N.O. N.C.	77031 77022	77040		11-24 PSI ±2	77049
13-24 PSI ±3	20 PSI	N.O. N.C.	77032 77023	77041		25-46 PSI ±3	77050
25-46 PSI ±5	35 PSI	N.O. N.C.	77033 77024	77042		47-76 PSI +5/-2	77051
47-76 PSI ±6	60 PSI	N.O. N.C.	77034 77025	77043		77-100 PSI +7/-2	77052
77-100 PSI ±7	85 PSI	N.O. N.C.	77035 77026	77044		101-126 PSI +9/-2	77053
101-126 ±9	115 PSI	N.O. N.C.	77036 77027	77045		127-150 PSI +10/-2	77054
127-150 PSI ±10	135 PSI	N.O. N.C.	77037 77028	77046			

Notes:

1. The N.C. circuit is the reference circuit for the dual circuit switch; the normally open circuit is not adjusted. The expected dead band between the N.C. & N.O. circuit is shown in the chart below. For applications requiring the normally open circuit as the reference circuit the N.C. circuit is not adjusted.

2. Switch may be adjusted so that: A. N.C. circuit opens before N.O. circuit closes.

B. N.C. and N.O. circuit have same set point.

C. N.O. circuit closes before the N.C. circuit opens. (There is no dead band and both circuits are on for a brief period of time.)

3. The tolerances given in the table are applicable to a switch adjusted so that the N.O. circuit closes before the N.C. circuit opens and applies to the N.C. circuit. The N.O. set point and tolerances are such that a minimum overlap of 1 PSI exists during which both circuits are on.

Note 1: Expected Dead Band (Higher than N.C. circuit)

Contact Setting	Dead Band			
0.5-3 PSI	1.5 PSI			
4-7 PSI	2.5 PSI			
8-13 PSI	3.5 PSI			
14-24 PSI	8 PSI			
25-50 PSI	15 PSI			
51-90 PSI	23 PSI			
91-150 PSI	40 PSI			

Set Points from 1.1" to 22" Hg 5000 Series Extended Duty Vacuum Switches With Direct Action Blade Contacts


The 5000 Series switch is specifically designed to stand up to extended duty applications. This switch is factory set. It features a fluorosilicone rubber diaphragm for compatibility with a wide variety of fluids, and various terminations including a Metri-Pack connector that forms a tight seal when connected. Among the outstanding design benefits are its durable construction, compact size, and enhanced set point integrity.

Standard Specifications

Type:Direct action blade
contactContacts:Silver alloy, gold platedSet Point:Factory setVacuum:1.1 to 22" HgOperatingPressure:Burst Pressure:150 PSI

Ratings:

Resistive:	15	AMP-	6	VDC		
	8	AMP-	12	VDC		
	4	AMP-	24	VDC		
Inductive:	1	AMP-	120	VAC		
	0.5	AMP-	240	VAC		
Diaphragm:	Fluor	osilicor	ne elas	stomer		
Temperature						
Range:	-40° F to $+$ 250° F					
Connector:	1/8-27 NPT male thread					
Terminals:	#8-3	32 screv	vs,			
	1/4″	blade,				
	280	Series <i>I</i>	Netri-F	Pack		
Circuitry:	SPST	-N.O.,	N.C.			
Base:	Brass	5				
Cover:	Glass reinforced					
	polyester					
Options:	Various base connector					
	threc	nd sizes	; wire	leads		
	(pott	ed & se	aled).			

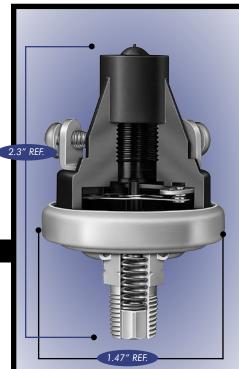

5000 Series Switch with Screw Terminals

5000 Series Vacuum Switch							
		Internally (Grounded	Two Terminals			
		Part Nu	mber	Part Number			
Contact Setting	Circuitry	Screw	Blade	Screw	Blade		
1.1-22″ Hg	N.O.	78813	78814	77342	77344		
0	N.C.	78815	78816	77343	77345		

Standard set points are 2"Hg(27" H₂O), 4"Hg, 9"Hg, and 17"Hg

Contact Setting	Tolerance		
1.1-3"Hg (15-41"H2O)	±.22"Hg(3"H ₂ O)		
4-8″Hg	±1″Hg		
9-17″Hg	±2″Hg		
18-22″Hg	±3″Hg		



Switch Boot P/N 79380 for Vacuum and Pressure