

# Titanis 2.4 GHz Swivel SMA Antenna

Part No. B4844 / B6090

**Product Specification** 

### **Features**

- Designed for 2.4 GHz applications: Bluetooth®, Wi-Fi® (802.11a/b/g/n), ZigBee®, etc. as well as 2.3 GHz WiMAX<sup>™</sup>, 2.5 GHz WiMAX<sup>™</sup> and WiBro.
- Antenna with a SMA male connector
- Also available as SMA reverse thread to meet FCC regulations, part 15
- High efficiency
- Supplied in bulk

### **Description**

Titanis is intended for use with all 2.4 GHz applications. The antenna is fitted with a SMA male connector and a blade made of flexible material that can be rotated 360 degree.

No external matching network required.

## **Applications**

- Development tools
- Test equipment
- Access points, routers, etc
- **Printers**



### 4 Part number

Titanis Standard SMA - male: B4844

Titanis Reverse thread SMA - male: B6090

### 5 General data

Product name	Titanis 2.4 GHz	
Part Number	B4844 (Standard SMA – male)	
	B6090 (Reverse thread SMA – male)	
Frequency	2.4 – 2.5 GHz	
Polarization	Linear	
Operating temperature	-40 °C to +85 °C	
Impedance	50 Ω	
Weight	7.1 g	
Antenna type	<sup>1</sup> Swivel external	
Dimensions	20 x 19.5 x 62.5 [mm]	

<sup>&</sup>lt;sup>1</sup>The blade of the antenna is the only part that swivels. DO NOT twist the plastic housing of the antenna blade. The housing is NOT designed to twist or turn and any attempt to do so will likely result in permanent damage to the antenna and its performance and will not be covered by warranty. Installation and removal of the antenna should only be done by turning the metal SMA connector.


Titanis is not suitable for outdoor use or applications.

### 6 Electrical characteristics


	Typical performance	Conditions
Peak gain	2.2 dBi	
Average gain	-1.0 dBi	
Average efficiency	80%	Data given for the 2.4 – 2.5 GHz frequency range
Maximum Return Loss	-13 dB	
Maximum VSWR	1.6:1	

## 7 Electrical performance


### 7-1 Return Loss

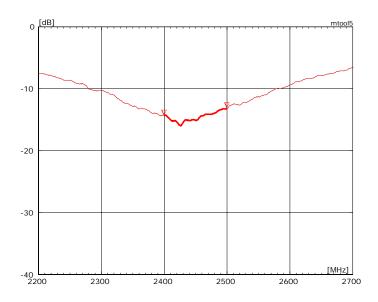

### **7-2 VSWR**

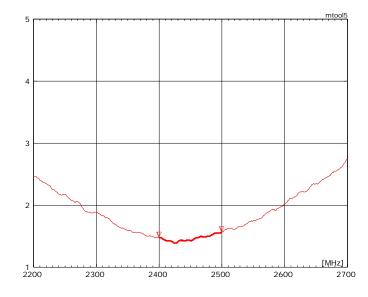


## 7-3 Antenna patterns

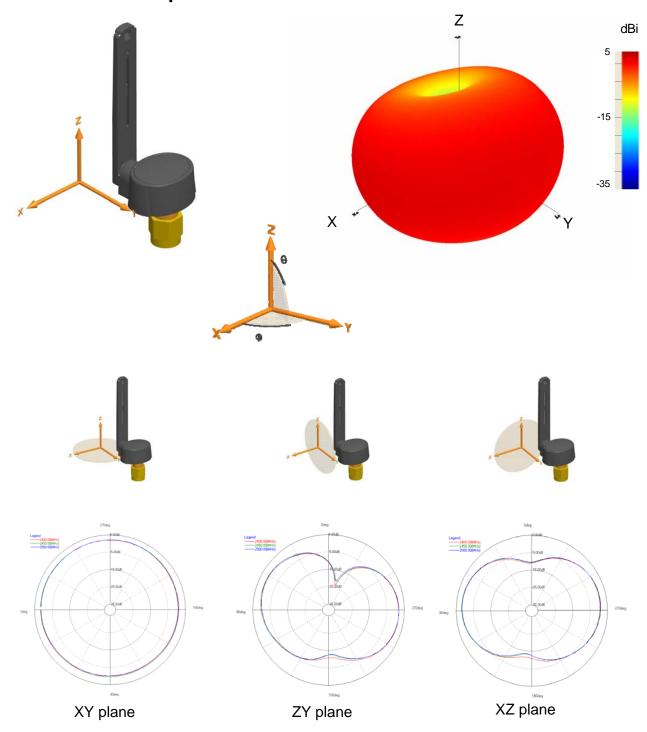

Patterns show combined polarisations

### 8 Antenna dimensions

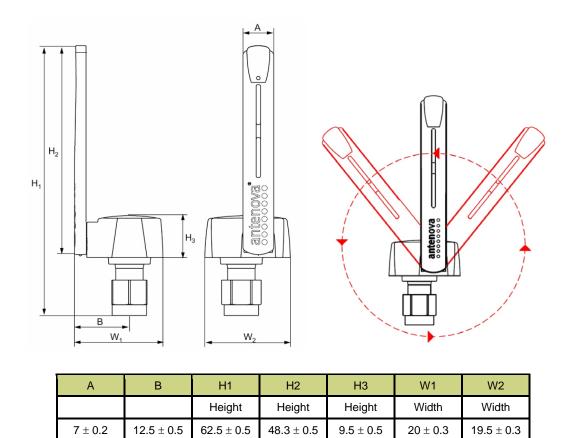

Dimensions in mm

Warning: The blade of the antenna is the only part that swivels. DO NOT twist the plastic housing of the antenna blade. The housing is NOT designed to twist or turn and any attempt to do so will likely result in permanent damage to the antenna and its performance and is not covered by warranty. Installation and removal of the antenna should only be done by turning the metal SMA connector.

## 9 Hazardous material regulation conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova's website.

## 10 Packaging


### 10-1 Optimal storage conditions


Temperature	-10°C to 40°C	
Humidity	Less than 75% RH	
Shelf Life	48 Months	
Storage place	Away from corrosive gas and direct sunlight	

### 10-2 Packaging information

The antennas are delivered in bulk, enclosed in plastic bags.

### 10-3 Bag label information

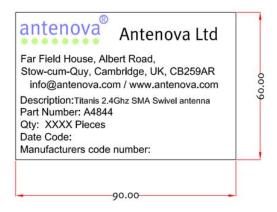

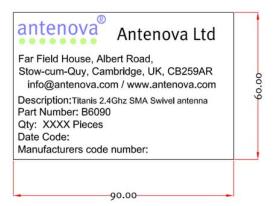

Dimensions in mm



## www.antenova.com

### **Corporate Headquarters**

Antenova Ltd. Far Field House Albert Road Stow-cum-Quy Cambridge CB25 9AR

### **North America Headquarters**

Antenova Ltd. Rogers Business Park 2541 Technology Drive Suite 403 Elgin, IL 60124

Tel: +886 (0) 2 8797 8

**Asia Headquarters** 

Antenova Asia Ltd.

Nei-Hu District

Taipei 11493 Taiwan, ROC

4F. No. 324, Sec. 1, Nei-Hu Road

 Tel:
 +44 1223 810600
 Tel:
 +1 (847) 551 9710
 Tel:
 +886 (0) 2 8797 8630

 Fax:
 +44 1223 810650
 Fax
 +1 (847) 551 9719
 Fax:
 +886 (0) 2 8797 6890

 Email:
 info@antenova.com
 Email:
 info@antenova.com

**Copyright**® **2011 Antenova Ltd.** All Rights Reserved. Antenova® and gigaNOVA® are trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies.

The materials provided herein are believed to be reliable and correct at the time of print. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.



## Integrated Antenna and RF Solutions

7