

Chronos 2 Plug-In Timers

Crouzet Products /Automation Controls /Electronic Timers /8 & 11 Pin Chronos 2 Timers


PRODUCT FEATURES

- ✚ Multi-function or mono-function
- ✚ Multi-range (7 ranges, available options)
- ✚ Multi-voltage
- ✚ SPDT or DPDT relay output: 10 A - 250 V
- ✚ 8 and 11 Plug-in
- ✚ LED status indicator
- ✚ 3-wire sensor control option
- ✚ cUL, UL listed, CSA recognized, CE Approved



8-Pin Plug-In Timers

Type	Function	Connection	Supply Voltage	Nominal Rating	Part number	
OL2R1	L (Repeat Cycle)	8-Pin Plug-In	24VDC, 24-240VAC	8A SPDT	88867801	Check Stock
OUR1	Multifunction	8-Pin Plug-In	24VDC, 24-240VAC	10A SPDT	88867105	Check Stock
OA2R1	A (Delay-on-Make)	8-Pin Plug-In	24VDC, 24-240VAC	10A DPDT	88867215	Check Stock
OCR1	C (Delay-on-Break)	8-Pin Plug-In	24VDC, 24-240VAC	10A SPDT	88867135	Check Stock
OLR1	Li,L (Repeat Cycle)	8-Pin Plug-In	24VDC, 24-240VAC	10A SPDT	88867155	Check Stock
OUR4	Multifunction	8-Pin Plug-In	12VAC/DC	10A SPDT	88867100	Check Stock
OUR3	Multifunction	8-Pin Plug-In	12-240VAC/DC	10A SPDT	88867103	Check Stock

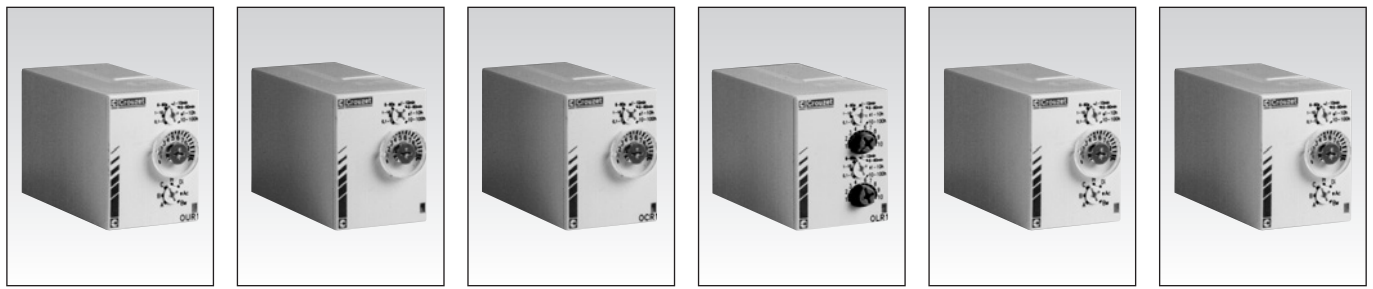

0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h
OUR1	OA2R1	OCR1	OLR1	OUR4	OUR3
88 867 105	88 867 215	88 867 135	88 867 155	88 867 100	88 867 103
Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw	Mono-function A	Mono-function C	Bifunction Li - L	Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw	Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw
10 A	10 A	10 A	10 A	10 A	10 A
1 relay	2 relays	1 relay	1 relay	1 relay	1 relay

Function diagrams

Function A
Delay on Make
1 relay

Function C
Delay on Break
1 relay

Function L
Repeat Cycle. Off Time First
Pause start

Function D
Repeat Cycle. Equal On/Off Time.
Off Time First.
Pause start

Function H
Interval
1 relay

Function Li
Repeat Cycle. On Time First.
Pulse start

Function Di
Repeat Cycle. Equal On/Off Time.
On Time First.
Pulse start

Function At
Accumulative Delay on Make
1 relay

Function Ht
Accumulative Interval
1 relay

Function Ac
Combo Delay on Make/Delay on Break. Equal On/Off Time.
1 relay

Function Bw
Pulse output (adjustable)
1 relay

Function B
Single Shot
1 relay

Connections: 8-pin 1 relay
(Y1 = C, Function diagrams)

Functions:
A - At / H - Ht / B / C
Di - D / Ac / Bw

Li:

8-pin 2 relay

A

Dimensions

Accessories

8-pin connector base S08

To order, specify:

1 Type	2 Part number	3 Part number
Example: Chronos 2 Timers OUR1	88 867 105	8-pin connector base S08