MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
5LS8





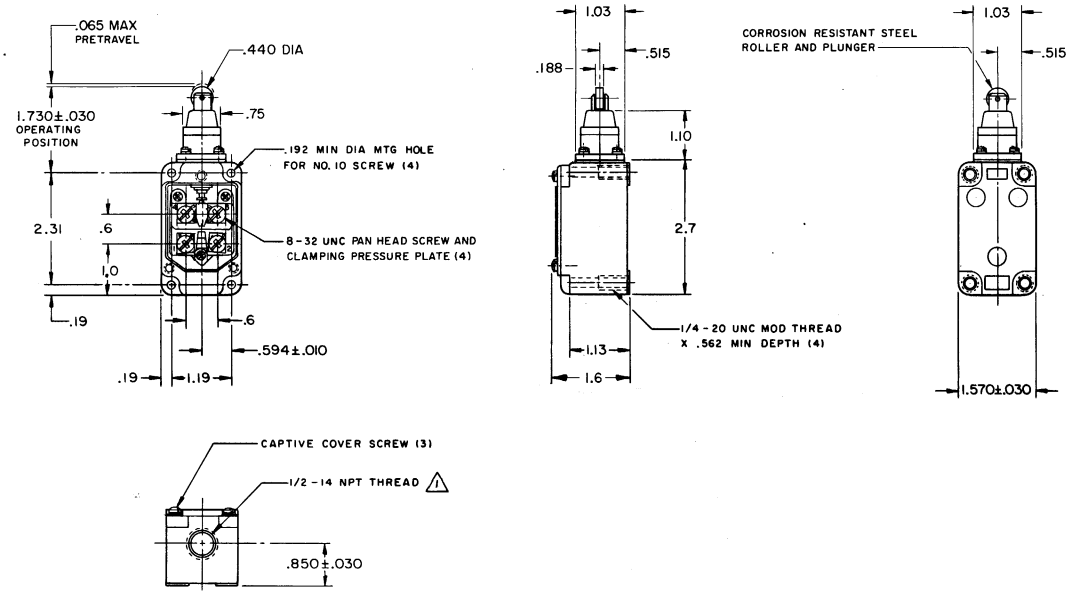

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING FORCE - - - - - 3 1/2 LB MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
RELEASE FORCE - - - - - - - - 1 LB MIN	10A-120, 240, OR 480 VAC, 1/3 HP-120 VAC 3/4 HP-240 VAC; 0.8 A-115 VDC; 0.4 A-230 VDC 0.1 A-550 VDC PILOT DUTY: 600 VAC MAX	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL - - - - - .020 MAX		TOLERANCES ARE:
OVERTRAVEL - - - - - - - - - .219 MIN		ONE PLACE (.0) ±.030
RELEASE TRAVEL - - - - - - - .015 MIN		TWO PLACE (.00) ±.015
SWITCH-BASIC REPLACEMENT - - - - - 2MN1		THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT

NOTE -
1 SEAL TO BE FURNISHED BY USER
2 - OPERATING HEAD MAY BE REASSEMBLED 90° FROM POSITION SHOWN

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

REVISIONS			
A	C050952	CJH 3 JUN 83	
B	CO 53005-D	CJH 1 AUG 84	
C	CO 65814-E	GAT 26 NOV 90	
D	CO 77031	JDB 22 DEC 93	

DRAWN	OMW	10 APR 69	
CHECK	DCS	10 APR 69	
CHECK			
ISSUE	DRAWING NUMBER	RELEASE NO.	REPLACES
X2 X5	M	PR-561	5LS8

PD-60378-003

Downloaded from Elcodis.com electronic components distributor