

Features

General

- High-performance, Low-power SecureAVR™ RISC Architecture
 - 135 Powerful Instructions (Most Executed in a Single Clock Cycle)
- Low Power Idle and Power-down Modes
- Bond Pad Locations Conforming to ISO 7816-2
- ESD Protection to ± 6000V
- Operating Ranges: 2.7 to 5.5V
- Compliant with GSM, 3GPP and EMV 2000 Specifications, PC Industry Compatible
- Available in Wafers, Modules, and Industry-standard Packages

Memory

- 288K Bytes of ROM Program Memory including 32K bytes of ROM with specific access
- 72K Bytes of EEPROM, Including 128 OTP Bytes and 384-byte Bit-addressable Bytes
 - 1 to 128-byte Program / Erase
 - 1.25ms Program / 1.25ms Erase
 - Typically 500,000 Write/Erase Cycles at a Temperature of 25°C
 - 10 Years Data Retention
 - EEPROM Erase only mode
 - Write EEPROM with or without autoerase
- 8K bytes RAM Memory (6K bytes of secureAVR RAM, 2K bytes of AdvX™ RAM, shared with the secureAVR core)

Peripherals

- One I/O Port
- One ISO 7816 Controller
 - Up to 625 Kbps at 5 MHz
 - Compliant with T=0 and T=1 Protocols
- Programmable Internal Oscillator (Up to 30 MHz for AdvX and 30 Mhz for internal CPU Clock)
- Two 16-bit Timers
- Random Number Generator (RNG)
- 2-level Interrupt Controller
- Hardware DES and Triple DES DPA/DEMA Resistant
- Checksum Accelerator
- Code Signature Module
- CRC16 & 32 Engine (Compliant with ISO/IEC 3309)
- 32-Bit Cryptographic Accelerator (AdvX for Public Key Operations)
 - RSA, DSA, ECC, Diffie-Hellman

Security

- Dedicated Hardware for Protection Against SPA/DPA/SEMA/DEMA Attacks
- Advanced Protection Against Physical Attack, Including Active Shield, EPO, CStack Checker, Slope Detector, Parity Errors
- Environmental Protection Systems
- Voltage Monitor
- Frequency Monitor
- Temperature Monitor
- Light Protection
- Secure Memory Management/Access Protection (Supervisor Mode)

Certification targeted

- CC EAL5+
- VISA
- CAST



Secure Microcontroller for Smart Cards

AT90SC 28872RCU Summary

6542BS-SPD-02May07



Note: This is a summary document. A complete document will be available under NDA. For more information, please contact your local Atmel sales office.

Development Tools

- Voyager Emulation Platform (ATV4) to Support Software Development
- IAR Embedded Workbench® V4.20 Debugger or Atmel's AVR Studio® Version 4.07 or Above
- Software Libraries and Application Notes

Description


The AT90SC28872RCU is a low-power, high-performance, 8/16-bit microcontroller with ROM program memory, EEPROM memory, based on the SecureAVR enhanced RISC architecture.

By executing powerful instructions in a single clock cycle, the AT90SC28872RCU achieves throughputs close to 1 MIPS per MHz. Its Harvard architecture includes 32 general-purpose working registers directly connected to the ALU, allowing two independent registers to be accessed in one single instruction executed in one clock cycle.

In addition to the 288K bytes of embedded ROM, the AT90SC28872RCU includes 72K of Atmel's high density EEPROM. The ability to map the EEPROM in the code space allows parts of the program memory to be reprogrammed in-system. This technology combined with the versatile 8/16-bit CPU on a monolithic chip provides a highly flexible and cost-effective solution to many smart card applications.

Figure 1 shows a block diagram of the AT90SC28872RCU

Figure 1. AT90SC28872RCU SecureAVR Enhanced RISC Architecture

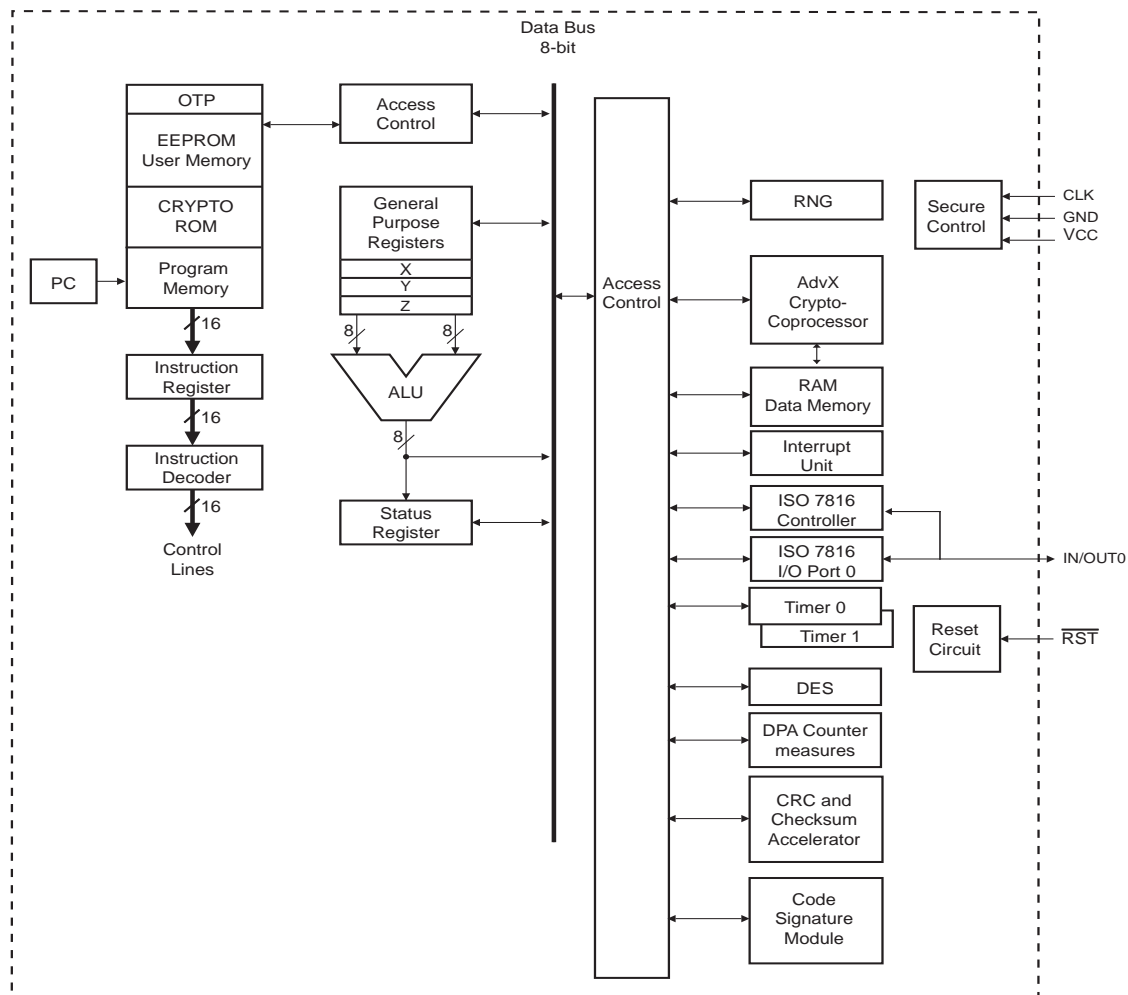



Atmel Corporation

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl
Route des Arsenalux 41
Case Postale 80
CH-1705 Fribourg
Switzerland
Tel: (41) 26-426-5555
Fax: (41) 26-426-5500

Asia

Room 1219
Chinachem Golden Plaza
77 Mody Road Tsimshatsui
East Kowloon
Hong Kong
Tel: (852) 2721-9778
Fax: (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
Japan
Tel: (81) 3-3523-3551
Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

La Chantrerie
BP 70602
44306 Nantes Cedex 3, France
Tel: (33) 2-40-18-18-18
Fax: (33) 2-40-18-19-60

ASIC/ASSP/Secure Products

Zone Industrielle
13106 Rousset Cedex, France
Tel: (33) 4-42-53-60-00
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park
Maxwell Building
East Kilbride G75 0QR, Scotland
Tel: (44) 1355-803-000
Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2
Postfach 3535
74025 Heilbronn, Germany
Tel: (49) 71-31-67-0
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine
BP 123
38521 Saint-Egreve Cedex, France
Tel: (33) 4-76-58-30-00
Fax: (33) 4-76-58-34-80

Literature Requests

www.atmel.com/literature

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© Atmel Corporation 2007. All rights reserved. Atmel®, logo and combinations thereof, and others are registered trademarks. Everywhere You AreSM, and others are the trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.