

**1A LOW DROPOUT LINEAR REGULATOR****AZ1117****Description**

The AZ1117 is a series of low dropout three-terminal regulators with a dropout of 1.15V at 1A output current.

The AZ1117 series provides current limiting and thermal shutdown. Its circuit includes a trimmed bandgap reference to assure output voltage accuracy to be within 1% for 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 5.0V and adjustable versions or 2% for 1.2V version. Current limit is trimmed to ensure specified output current and controlled short-circuit current. On-chip thermal shutdown provides protection against any combination of overload and ambient temperature that would create excessive junction temperature.

Features


- Trimmed Current Limit
- On-chip Thermal Shutdown
- Three-terminal Adjustable or Fixed 1.2V, 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 5V
- Line Regulation: 1mV (Typical) at 3.3V Output Voltage
- Load Regulation: 1mV(Typical) at 3.3V Output Voltage

Applications

- PC Motherboard
- LCD Monitor
- Graphic Card
- DVD-video Player

Benefits


- Equivalent Characteristics to the Products from Worldwide First-class Vendors
- Very Competitive Price

Pin Configuration**Parametric Table**

I_{OUT} (Max) (A)	1
Quiescent Current (Max) (mA)	10
V_{DROP} (Typ) (V)	1.15
V_{IN} (Min) (V)	2.8 (ADJ)
V_{IN} (Max) (V)	15
V_{OUT} (V)	1.2, 1.5, 1.8, 2.5, 2.85, 3.3, 5.0, ADJ
PSRR (dB)	75
Accuracy (%)	± 1 (Except 1.2V)
Load Regulation (Typ) (mV)	1 (3.3V)
Line Regulation (Typ) (mV)	1 (3.3V)
On/Off Pin	No
Error Flag	No
Operating Junction Temperature (Min) ($^{\circ}C$)	-40
Operating Junction Temperature (Max) ($^{\circ}C$)	125

Additional Available Materials

- Samples
- Data Sheet
- Reliability Report
- ESD Report






1A LOW DROPOUT LINEAR REGULATOR


AZ1117

Pin Configuration (Continued)


TO-220-3

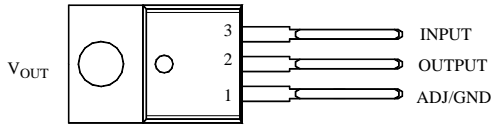

TO-263-3

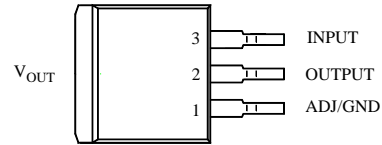

TO-252-2 (1)

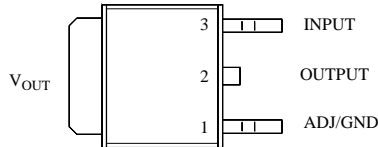

Ordering Information Example

Package	Temperature Range	Part Number		Marking ID		Packing Type
		Tin Lead	Lead Free	Tin Lead	Lead Free	
TO-220-3	-40 to 125°C	AZ1117T-ADJ	AZ1117T-ADJE1	AZ1117T-ADJ	AZ1117T-ADJE1	Tube
		AZ1117T-1.2	AZ1117T-1.2E1	AZ1117T-1.2	AZ1117T-1.2E1	Tube
		AZ1117T-1.5	AZ1117T-1.5E1	AZ1117T-1.5	AZ1117T-1.5E1	Tube
		AZ1117T-1.8	AZ1117T-1.8E1	AZ1117T-1.8	AZ1117T-1.8E1	Tube
		AZ1117T-2.5	AZ1117T-2.5E1	AZ1117T-2.5	AZ1117T-2.5E1	Tube
		AZ1117T-2.85	AZ1117T-2.85E1	AZ1117T-2.85	AZ1117T-2.85E1	Tube
		AZ1117T-3.3	AZ1117T-3.3E1	AZ1117T-3.3	AZ1117T-3.3E1	Tube
		AZ1117T-5.0	AZ1117T-5.0E1	AZ1117T-5.0	AZ1117T-5.0E1	Tube

Detailed information please refer to the relevant datasheet.

Sales Office:

USA

30920 Huntwood Ave. Hayward, CA 94544,
USA
Tel : +1-510-324-2988
Fax : +1-510-324-2788

Shanghai

8F, B Zone, 900 Yi Shan Road, Shanghai 200233,
China
Tel : 86-21-6495 9539
Fax : 86-21-6485 9673

Taiwan

4F, 298-1 Rui Guang Road, Nei-Hu District, Taipei,
Taiwan
Tel : 886-2-2656-2808
Fax : 886-2-2656-2806

Shenzhen

Room E, 5F, Noble Center, No.1006, 3rd Fuzhong Road, Futian
District, Shenzhen 518026, China
Tel : 86-755-8826 7951
Fax : 86-755-8826 7865