


PCM-10586-5A

Installation Wiring Kit for
PCM-9575/ PCM-9577F

The PCM-10586-5A cable kit includes the following cables:

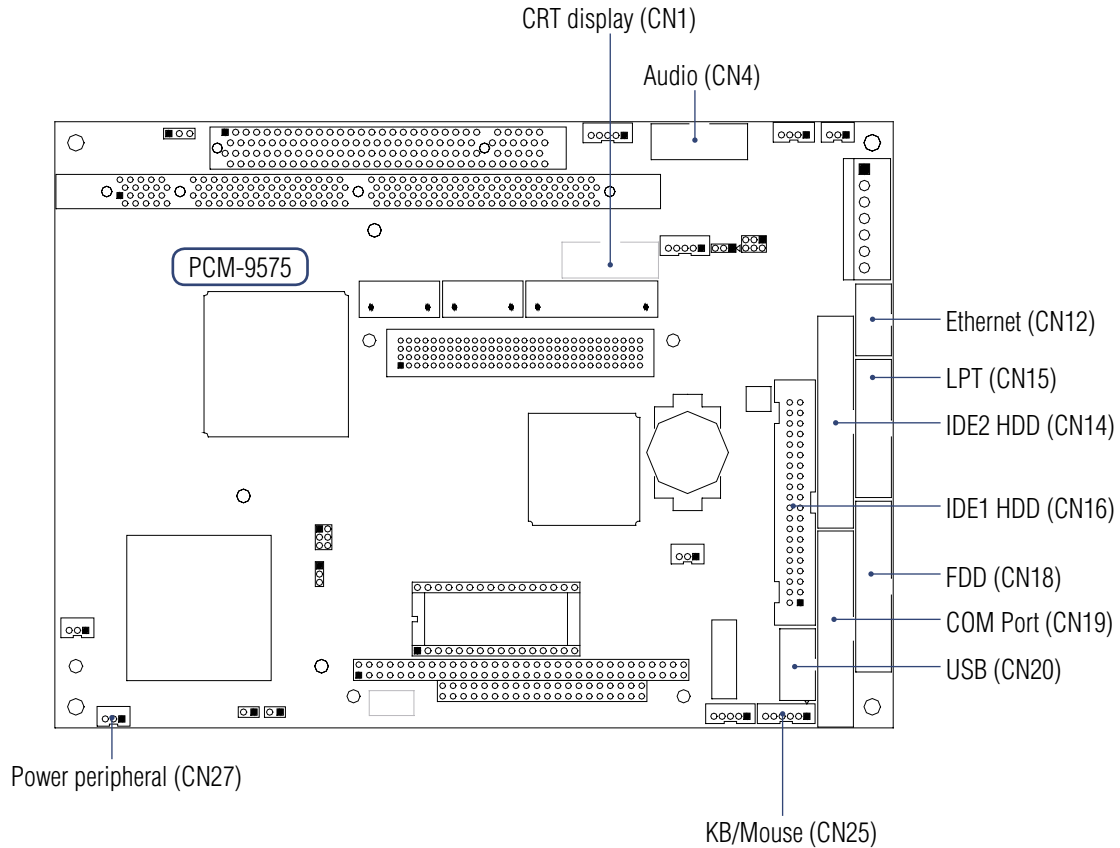

Part No.	Cable Description	PCM-9575 Connector	PCM-9577F Connector	Terminal Connector
1701440350	2.5" and 1.8" IDE	CN14	CN12	44-pin, 2 mm, female IDC (350 mm)
1701400452	3.5" IDE DMA/66 (40P)	CN16	CN13	40-pin, 2.54 mm, female IDC (450 mm)
1701340603	Dual floppy, 3.5" and 5.25" (34p)	CN18	CN24	34-pin dual floppy
1700260250	Parallel port	CN25	CN17	25-pin female DSUB
1701100202	Network, 100 Base-T	CN12	CN3	RJ45 8-pin modular jack
1701160101	VGA CRT	CN1	CN22	2 x 8-pin header (2 mm) 15-pin DSUB
1703060191	Keyboard and PS/2 mouse	CN25	CN27	5-pin circular DIN, 6-pin circular DIN
1703030300	Peripheral power (-5 V and -12 V)	CN27	CN7	(3-conductor)
1701400181	COM 1-4 cable	CN19	CM16	40-pin, 9-pin male DSUB x 4
1700160160	Audio cable	CN4	CN6	F 3.5 mm 16-pin, 5 female phone jacks
1703100260	USB cable	CN20	CN1, CN30, CN31	10-pin, IDE 2.0 mm, USB x 2 (26 cm)

1. Optional 24 bit LCD cable adapter (5 V) "9681000041", 24 bit LCD cable adapter (3.3 V) "9681000040"

Ordering Information

- PCM-10586-5A00E PCM-9575/PCM-9577 wiring kit

