

CMA-18-8007

Amplifier

8 GHz - 18 GHz

This Amplifier offers exceptional performance over the band 8 GHz to 18 GHz with 18 dBm P1dB output power and 39 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.

Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products



Specifications:

Model Number: CMA-18-8007

Frequency Range: 8 GHz - 18 GHz

Gain (min): 39 dB

Gain Vs Temp at any Frequency: This Amplifier is not Temperature Compensated

Noise Figure (max): 7.5 dB

Output Power @ 1dB Compression: 18 dBm

Gain Flatness Vs Frequency: +/-2.0 dB

3rd Order Intercept (Typ): 27 dBm

Power Supply:

Input Voltage: 11.5 to 15 VDC

Current @ 12 VDC (typ): 470 mA

Current @ 12 VDC (max): 540 mA

Case Type (See attached Outline): SX8

Temperature Range: +25



**TELEDYNE
MICROWAVE**


ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845
www.teledynemicrowave.com • microwave@teledyne.com

CMA-18-8007

Amplifier

8 GHz - 18 GHz

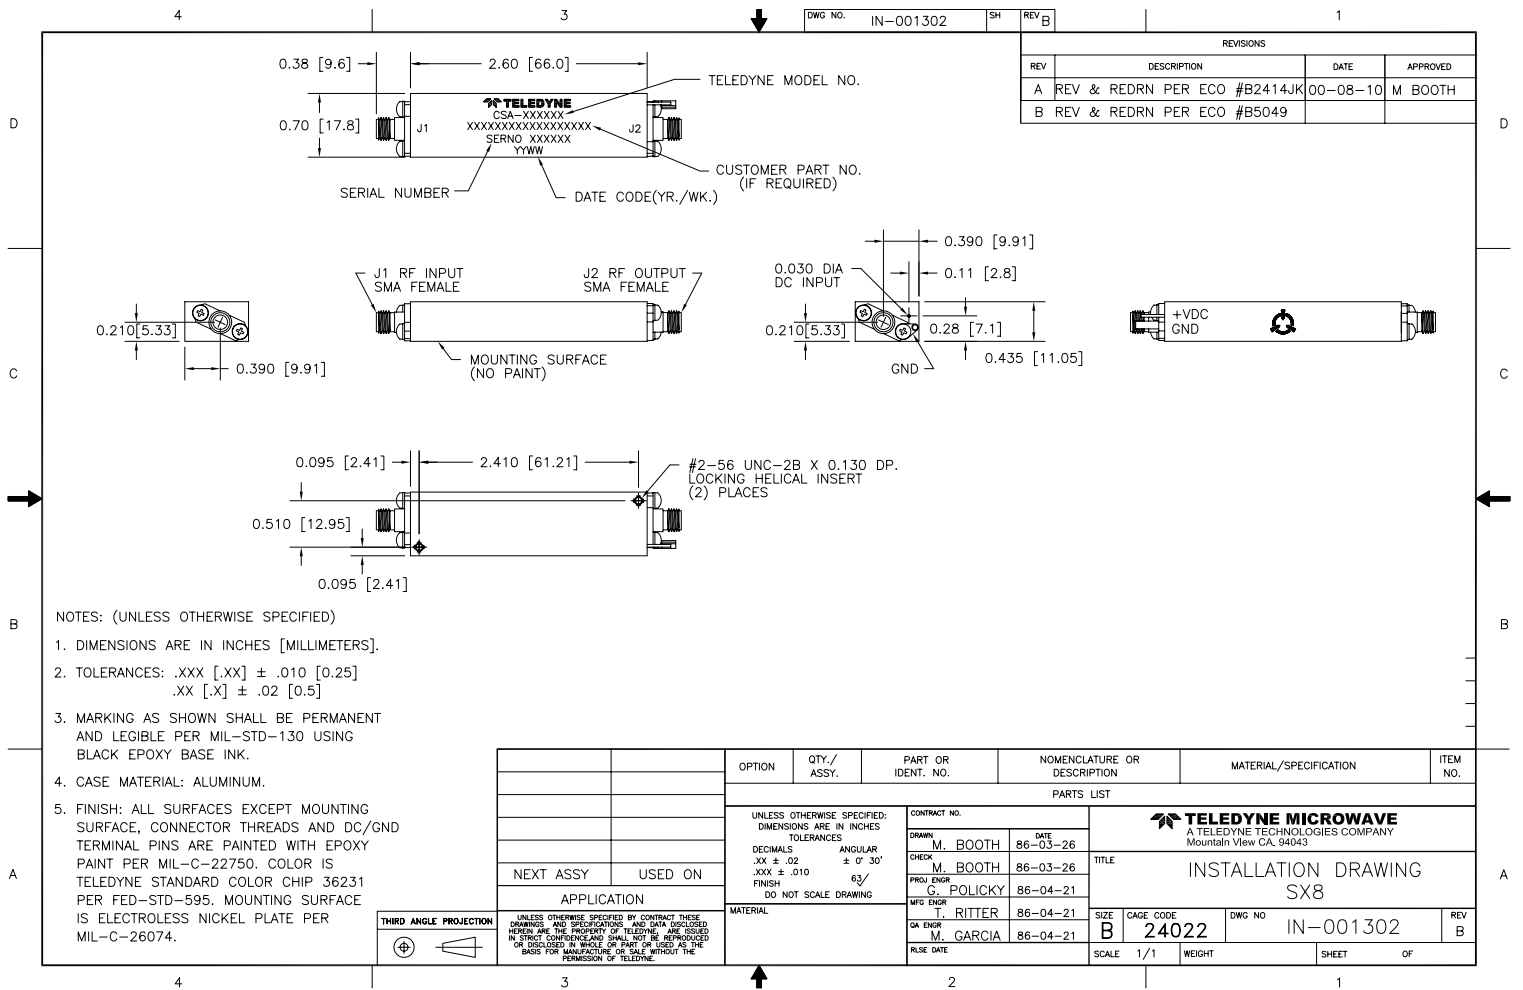

ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845
www.teledynemicrowave.com • microwave@teledyne.com

All Specifications are subject to change. Please contact Teledyne Microwave for the latest information on this product

08/05