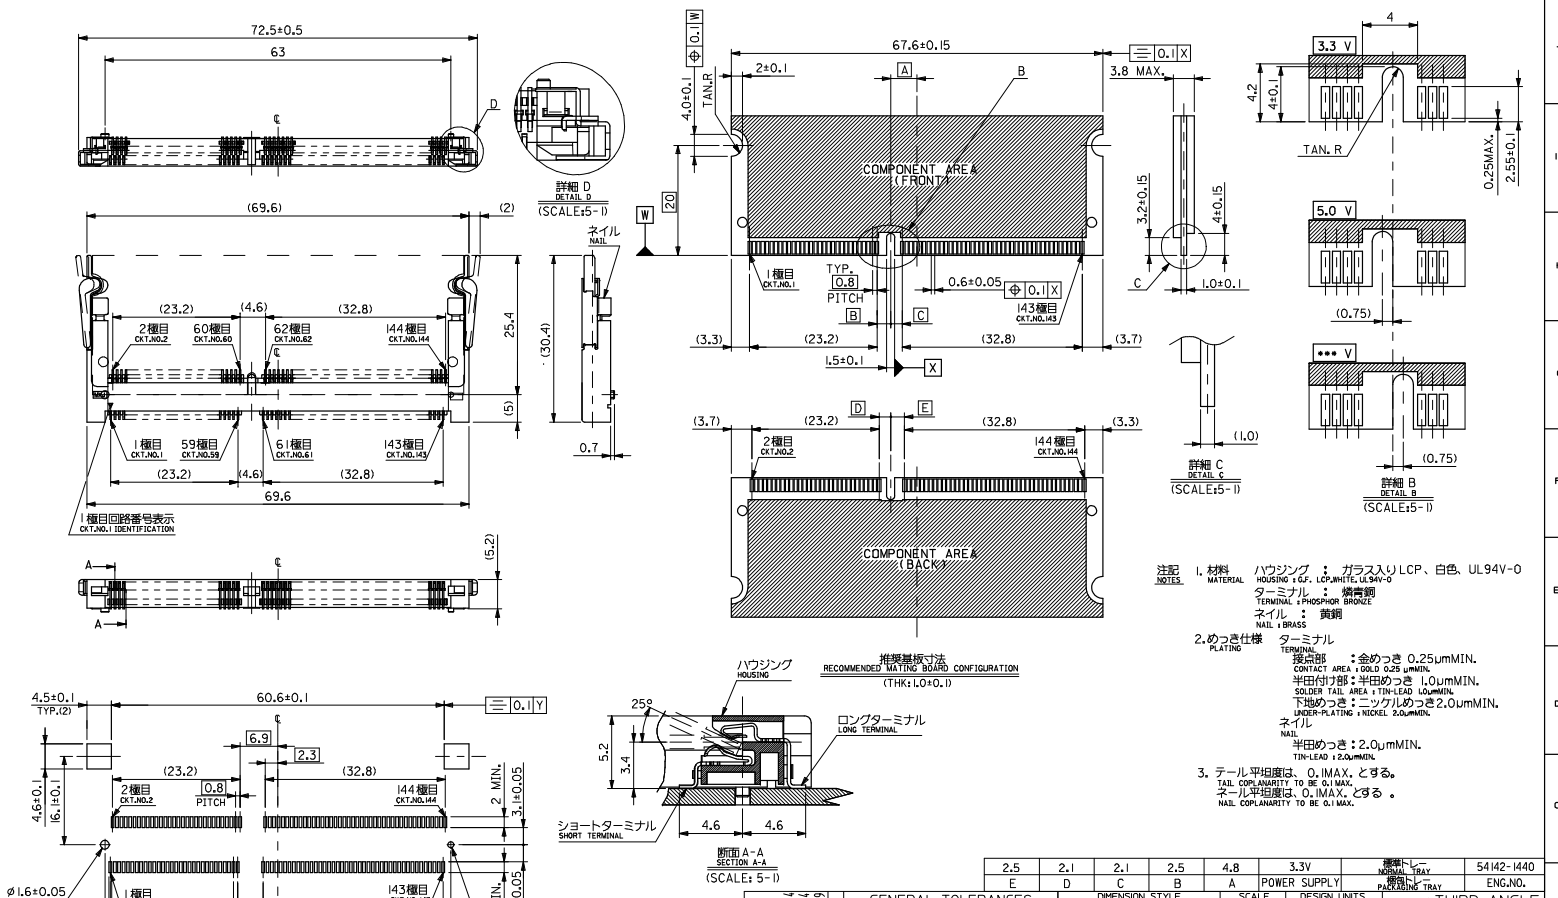

注記 NOTES

1. 材料 MATERIAL
ハウジング ： ガラス入りLCP、白色、UL94V-0
HOUSING : G.F. LCP,WHITE, UL94V-0
ターミナル ： 燐青銅
TERMINAL : PHOSPHOR BRONZE
ネイル ： 黄銅
NAIL : BRASS

2. めっき仕様 PLATING
ターミナル
TERMINAL
接点部 ：金めっき 0.25μmMIN.
CONTACT AREA : GOLD 0.25 μmMIN.
半田付け部：半田めっき 1.0μmMIN.
SOLDER TAIL AREA : TIN-LEAD 1.0μmMIN.
下地めっき：ニッケルめっき2.0μmMIN.
UNDER-PLATING : NICKEL 2.0μmMIN.
ネイル
NAIL
半田めっき：2.0μmMIN.
TIN-LEAD : 2.0μmMIN.

3. テール平坦度は、0.1MAX. とする。
TAIL COPLANARITY TO BE 0.1 MAX.
ネール平坦度は、0.1MAX. とする 。
NAIL COPLANARITY TO BE 0.1 MAX.

2.5	2.1	2.1	2.5	4.8	3.3V	梱包トレー NORMAL TRAY	54142-1440
E	D	C	B	A	POWER SUPPLY	梱包トレー PACKAGING TRAY	ENG.NO.

REVISED
EC NO: 12008-3662 2008/05/14
DRWN: K INOSHITAA 2008/05/14
CHKD: T HARUYAMA 2008/06/09
APPR: N IKITA
DESCRIPTION
REV D

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION
DRAWN BY: T. KANEKO DATE
CHECKED BY: Y ITO DATE
APPROVED BY: H IKESUGI DATE
MATERIAL NO.: SEE TABLE
TITLE: 0.8 PITCH S.O.DIMM HSG ASSY 144CKT (H=5.2)
molex MOLEX INCORPORATED
DOCUMENT NO.: SD-54142-001
SHEET NO.: 1 OF 1
SIZE: A2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Downloaded from Elcodis.com electronic components distributor