







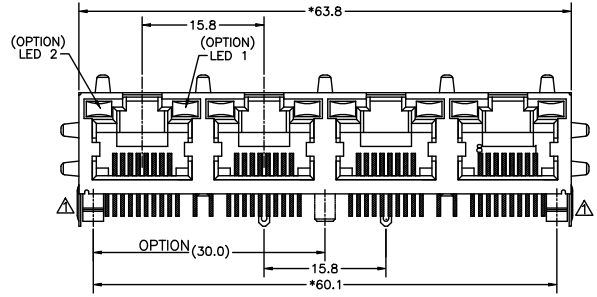




D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		DRAWING MODIFY	yangjian	88/09/06

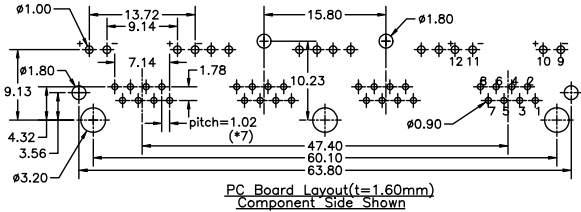

- NOTES:**
- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 60HZ, 1MIN.
 - LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL
REVERSE VOLTAGE: 5 VOLTS MAXIMUM
 - OPERATING: 750 CYCLES MIN.
- MECHANICAL:**
- HOUSING MATERIAL : FR52 UL94V-0. COLOR-BLACK.
 - INSERT MATERIAL : FR52 UL94V-0. COLOR-BLACK.
 - BACK PLATE MATERIAL : FR52 COLOR-BLACK.
 - LED SIZE : 3.2*2.0*7.0*P=2.54mm.
 - SHIELD MATERIAL : COPPER ALLOY 0.25mm THICKNESS PLATING NI.
 - CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm THICKNESS .
 - PLATING : GOLD PLATING OVER NICKEL.
 - PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:**
- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO 70°C.
 - WAVE SOLDERING TEMPERATURE: 255~265°C (5~10 SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F. CUL FILE No: E163191

PART NUMBER: E 5 J 8 8 - X X X J X X - L

- 1-LED1:GREEN ,LED2:YELLOW
 - 2-LED1:GREEN ,LED2:GREEN
 - 3-LED1:YELLOW ,LED2:GREEN
 - 4-LED1:G+Y ,LED2:G+Y
 - 5-LED1:RED ,LED2:GREEN
 - 7-LED1:YELLOW ,LED2:YELLOW
 - D-LED1:G+R ,LED2:G+R
 - E-LED1:GREEN ,LED2:RED
 - N-LED1:GREEN ,LED2:G+Y
 - P-LED1:Y+R ,LED2:GREEN
 - Q-LED1:G+Y ,LED2:G+R
 - S-LED1:Y+R ,LED2:Y+R
 - V-LED1:Y+G ,LED2:Y+G
- PLATING: 1-3u" 2-6u"
3-15u" 4-30u" 5-50u"
- 1- PLATE Tin SHIELD, STAMP PIN, LED LONG 7.00
 - 2- PLATE Ni SHIELD, STAMP PIN, LED LONG 7.00
 - 3- PLATE Tin SHIELD, ROUND PIN, LED LONG 7.00
 - 4- PLATE Ni SHIELD, ROUND PIN, LED LONG 7.00
 - 4-4 PORTS W/O MIDDLE POLE
 - C-4 PORTS W/ MIDDLE POLE
 - 0-NO SHIELD
 - 1-NO TAB
 - 2-TOP TABS.
 - 3-SIDE TABS.
 - 4-TOP TABS & SIDE TABS.

MM (INCH)		DFTO YANGJIAN	DATE 06/13/05	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHRD JAKE	DATE 2005/08/10	TITLE	
		MFO	DATE	RJ45 SIDE ENTRY LED GANG JACK 4 PORTS	
MM		APPLYUSHING	DATE 2005/08/10	DRAWING NO. GE5J3128	
.0 ± 0.20				SIZE A3	
.00 ± 0.15				REV 1	
.000 ± 0.075				DO NOT SCALE DRAWING	
ANGLES ±				SHEET 1 OF 1	
THIRD ANGLE PROJECTION		SCALE : 2:1			

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1