


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED DRAWING FORMAT, ADDED DIMENSIONS (ECN# 1261)	2/21/03	T CLARK
C	CHANGED COLOR OF CONNECTOR INSULATOR TO BLACK (ECN# 1334)	3/19/03	T CLARK
D	ECN 2116: ADDED (2) ADDITIONAL THUMBSCREWS	6/30/05	J. KEZULAS
E	ECN 2194: CHANGED INSTRUCTION SHEET AND CABLE SPECIFICATION	9/7/05	J. KEZULAS

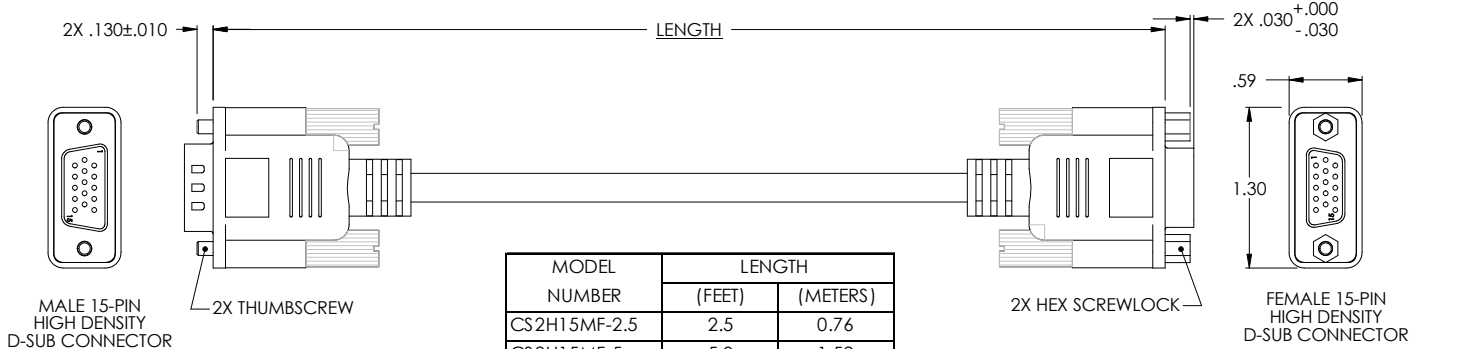

MODEL NUMBER	LENGTH	
	(FEET)	(METERS)
CS2H15MF-2.5	2.5	0.76
CS2H15MF-5	5.0	1.52
CS2H15MF-6	6.0	1.83
CS2H15MF-10	10.0	3.05
CS2H15MF-12	12.0	3.66
CS2H15MF-15	15.0	4.57
CS2H15MF-25	25.0	7.62
CS2H15MF-50	50.0	15.24

SPECIFICATIONS:
WIRING: STRAIGHT THROUGH, PIN TO PIN, ALL PINS.
SHIELD: DRAIN WIRE TIED TO CONNECTOR SHELLS
ELECTRICAL:
 VOLTAGE RATING: 30V
 DIELECTRIC STRENGTH: 1500V

MATERIALS:
CONNECTORS:
 INSULATORS: THERMOPLASTIC, UL 94V-0, BLACK
 CONTACTS: COPPER ALLOY, GOLD OVER NICKEL
 SHELLS: STEEL, TIN PLATED
 HOOD MOLDINGS: PVC, LIGHT GRAY
 INTERNAL SHIELD: (360°) STEEL BOX SHIELD OVER PRE-MOLD SOLDERED TO D-SUB SHELL
CABLE: U.L. STYLE 2919 15 CONDUCTORS 26 AWG STRANDED TINNED COPPER
OVERALL SHIELD: ALUMINIZED POLYESTER WITH DRAIN WIRE (100%) PLUS TINNED COPPER BRAID SHIELD
JACKET: PVC, LIGHT GRAY
HARDWARE: 4-40 THREAD, STEEL OR BRASS, NICKEL PLATED

CABLE CONTAINS TWO ADDITIONAL MALE THUMBSCREWS PACKAGED IN A SEPARATE BAG AND INSTRUCTION SHEET [CS2N-INS](#)

[\(REFERENCE L-COM CABLE SPECIFICATION CS2N-LCS\)](#)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
 TOLERANCES ARE:
 .X ± .1
 .XX ± .05
 .XXX ± .005
 CABLE LENGTH TOLERANCE
 ≤300' ±5% >300' ±2%

APPROVALS		DATE		 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
DRAWN BY	TJC	9/28/01					
CHECKED BY	DFP	9/28/01					
APPROVED BY	RC	10/3/01					
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY				PRODUCT DESCRIPTION PREMIUM DATA CABLE DRAWING TITLE OUTLINE DRAWING			
SIZE	A	FSCM NO.	43321	DWG. NO.	CS2H15MF-2.5-OD1	REV.	E
SCALE:	NONE	CAD FILE:	CS2H15MF-2.5-OD1.SLDRW	SHEET	1	OF	1

