


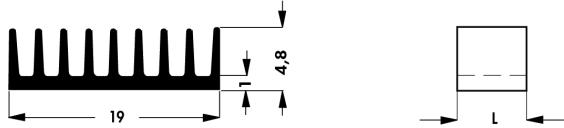

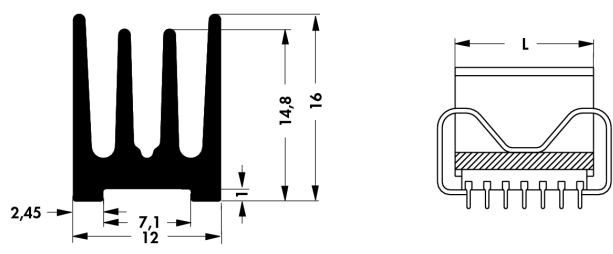


Heatsinks for DIL-IC

			
art. no.	R_{th} [K/W]	for housings	dim. [mm] L
ICK 14 16 L	46	14/16 contacts	19.0
ICK 20 L	34	20 contacts	25.0
ICK 6 8 L	83	6/8 contacts	8.5
			
art. no.	R_{th} [K/W]	for housings	dim. [mm] L
ICK 14 16 B	50.0	14/16 contacts	6.3
ICK 24 B	13.0	24 contacts	33.0
ICK 28 B	11.5	28 contacts	37.0
ICK 36 B	9.5	36 contacts	47.0
ICK 40 B	8.5	40 contacts	51.0
ICK 1000 B	–	–	1000.0

other length on request
surface: black anodised

with clip

			
art. no.	R_{th} [K/W]	for housings	dim. [mm] L
ICK 14 H	20	14 contacts	18.0
ICK 16 H	18	16 contacts	20.5
ICK 18 H	16	18 contacts	23.0
ICK 1000 H	–	–	1000.0

other length on request
surface: black anodised

B 23

Aluminium oxide wafers
 Mica wafers
 Kapton insulator washers
 Insulating clamping parts

→ E 9 – 10
 → E 11
 → E 8
 → E 35

Profiles for PCB components
 Heatsinks for PCB
 Hole pattern
 Profiles for PCB mounting

→ A 89
 → A 87
 → A 21
 → A 87 – 108