

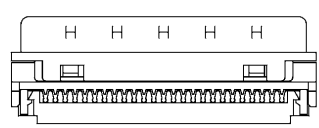
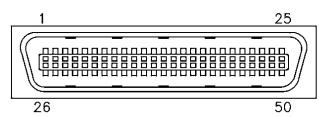

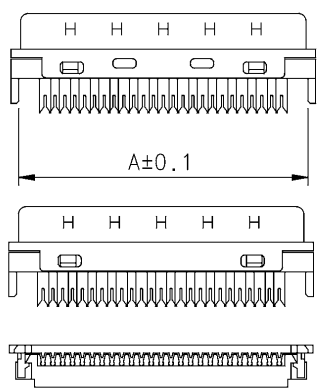



A3
IDEAS - PLAN REALISE A PARTIR D'UN MODELE 3D
NE PEUT ETRE MIS A JOUR QUE SUR CAO

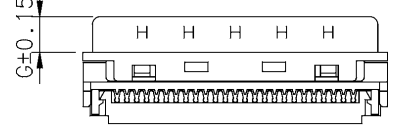

M Type
o (without hood,)

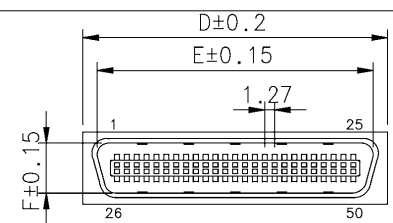


A Type
o (with hood,)

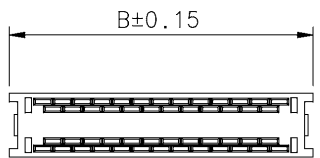

Termination Cover
(1 Places)

NO OF CONTACTS	A	B	C	D	E	F	G	H	I
14	14.38	16.38	11.18	16.45	12.80	6.46	4.60	8.50	13.10
20	18.10	20.10	14.90	20.00	16.60	6.40	4.60	9.30	13.10
26	22.00	24.00	18.70	24.00	20.40	6.46	4.60	9.30	13.10
36	28.35	30.35	25.21	30.40	26.70	6.46	4.60	8.50	13.10
50	37.30	39.30	34.10	39.30	35.60	6.46	4.60	9.30	13.70
68	48.73	50.70	45.50	50.60	46.95	6.46	4.60	9.30	13.60

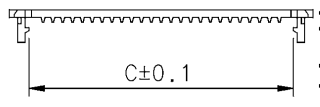

Wire Holder
(2 Places)

- FEATURES:**
- Half pitch 1.27mm(.050") series
 - Ribbon male connector I.D.C type for cable
 - Assembly hood with plastic steel inner shell or Die-Cast metal hood
 - Without hood with or without spring latch
 - Fully EMI/RFI shielded
- MATERIALS:**
- Housing And Cover: Plastic thermoplastic P.B.T UL94V-0 black
 - Contacts: Phosphor bronze gold selective plated
 - Shell: Steel nickel plated over copper
- ELECTRICAL:**
- Current Rating: 1 Amp
 - Insulation Resistance: >500M Ω /m
 - Withstanding Voltage: AC 500V/r.m.s for 1 Minute
 - Contact Resistance: 35m Ω Max
 - Temperature Range: -55°C ~ +105°C



MD5 ID 26 M 0 x Z

SERIES
Flat cable IDC termination

NUMBER OF CONTACT:
14, 20, 26, 36, 50, 68

CONTACT TYPES:
M = Male

CONTACT PLATING:
0 = selective flash gold
1 = selective 15u" gold
2 = selective 30u" gold

Hood Option:
M : without hood
A : with hood

WIRE HOLDER:
6 = 0.62mm
7 = 0.75mm
9 = 0.9mm

Amphenol Socapex Usine de Dole		TOL. GEN.																		
ECH. ENS.		VOLUME PIECE																		
N SERIE		SURFACE PIECE																		
DATE DU TIRAGE		PROTECTION																		
DESIGNATION		TRAITEMENT																		
MINI D SERIES		MATIERE																		
DOSSIER		CLIENT	A	CREATION PLAN	ATO	30/05/2005	ATO	A	X											
N INTERNE		MODIFICATIONS																		
MD5 ID xx M		EXEC. DATE																		

COMMUNICATION ET UTILISATION INTERDITES SAUF AUTORISATION