
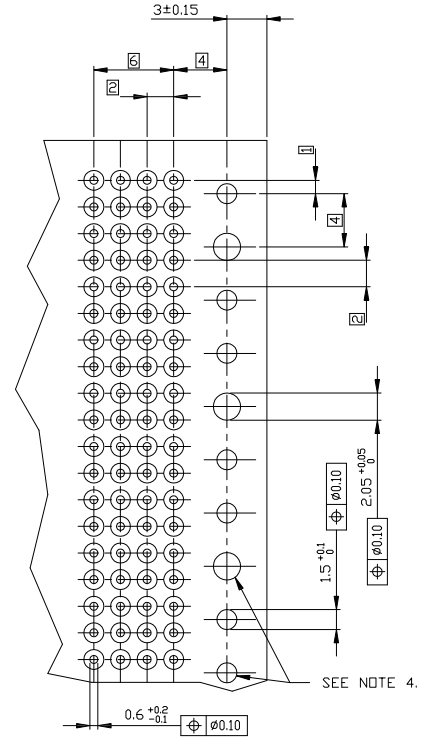
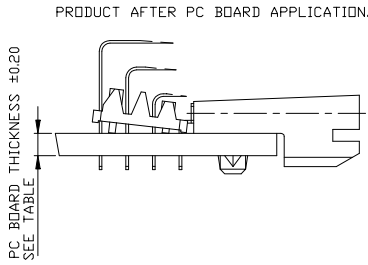
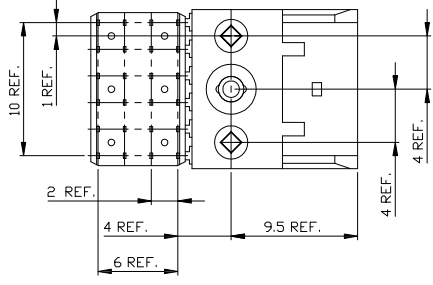
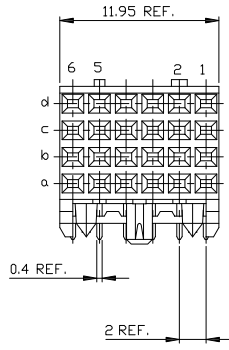


PC BOARD VERSIONS		
PRODUCTNR	PCB THICKNESS	DIM'A*
89035-X01	1,6	2,90
89035-X11	2,4	3,53
89035-X01LF	1,6	2,90
89035-X11LF	2,4	3,53

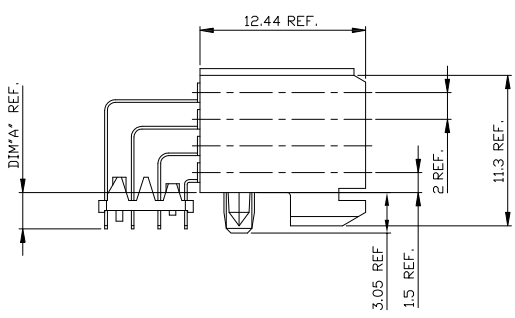

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - PLATING SOLDER TAILS 2-8 μm SnPb 90-97 OR 2-8 μm PURE Sn FOR LEAD FREE.
 - INDICATED HOLES ARE UNPLATED.
 - PRODUCT MARKING: PART NUMBER & BATCH ID.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.







PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

mat'l. code	tolerances unless otherwise specified	CUSTOMER COPY	FCI
lin ecn mgar date	linear	projection	www.fciconnection.com
H 306-001 01 01/20		1st angle	title RA FEMALE SIGNAL
J 306-001 01 11/23/06			12 mm PRESS PEG
K 307-001 01 05/23/07			product Family METRAL(™)
L 308-001 01 02/08			code 89035
M 309-001 01 06/06/09			sheet 1 of 3
G 08847 ULA 00530 APP J Wntjes 92122	scale 5:1	A2	
sheet revision M H N			
index sheet 1 2 3			

All rights are reserved. Reproduction or translation without prior written permission is prohibited. Property of FCI Inc. © FCI Inc.

PC BOARD VERSIONS		
PRODUCTNR	PCB THICKNESS	DIM*A
89035-X02	1.6	2.90
89035-X12	2.4	3.53
89035-X02LF	1.6	2.90
89035-X12LF	2.4	3.53

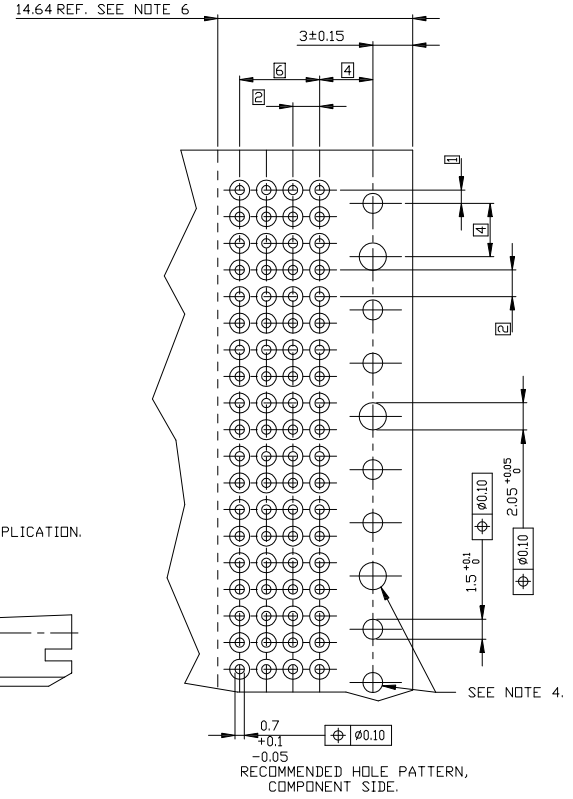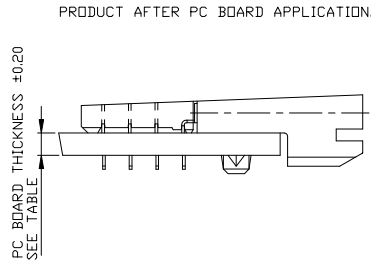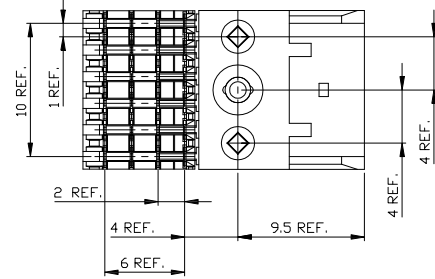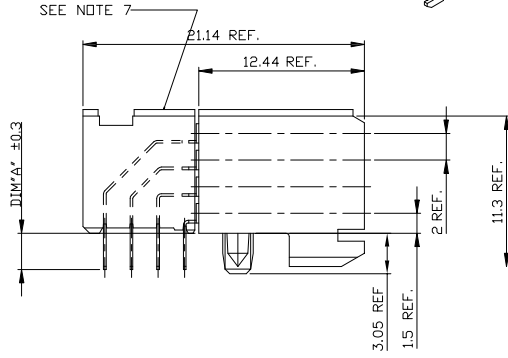

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - PLATING SOLDER TAILS 2-8 μ m SnPb 90-97 OR 2-8 μ m PURE Sn
 - INDICATED HOLES ARE UNPLATED.
 - PRODUCT MARKING: PARTNUMBER & BATCH ID.
 - SET BACK FOR PRESS BLOCK.
 - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.






PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

mat'l. code	tolerances unless otherwise specified	CUSTOMER COPY	FCI
l	linear	projection	www.fciconnection
x	angles	title	RA FEMALE SIGNAL
	dr	product family	12 mm PRESS PEG
	engr	scale	code
	chr	size	89035
	app	sheet	213
sheet	revision	2 of	
index	sheet		

All rights strictly reserved. Reproduction or translation in any form without the prior written permission of FCI is prohibited.

PC BOARD VERSIONS		
PRODUCT NR.	PCB THICKNESS	DIM "A"
89035-X03	1,6	2,90
89035-X13	2,4	3,53
89035-X03LF	1,6	2,90
89035-X13LF	2,4	3,53

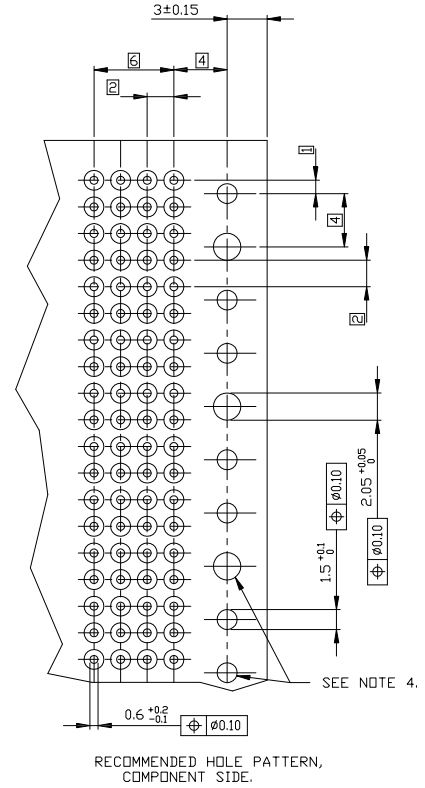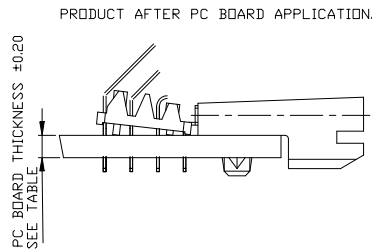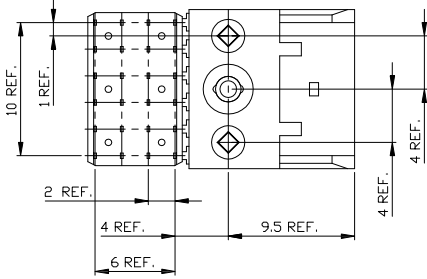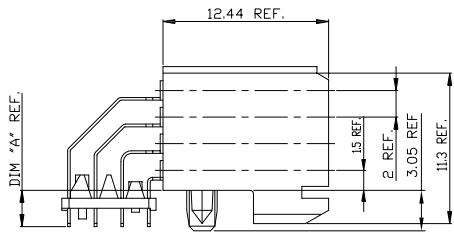

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn FOR LEAD FREE.
 - INDICATED HOLES ARE UNPLATED.
 - PRODUCT MARKING: PART NUMBER & BATCH ID.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-009
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
tr	ecn	ngdr	date	linear	projection	title	www.fciconnection
						RA FEMALE SIGNAL	
						12 mm PRESS PEG	
						product family METAL(tm)	code 213
						size	89035
						scale A2	sheet 3 of 3
sheet index	revision						
	sheet						

All rights strictly reserved. Reproduction or translation without prior written permission is prohibited. Property of FCI Inc. © FCI Inc.