THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
			R	ECR-05-4446	28JUN05	RB	MM

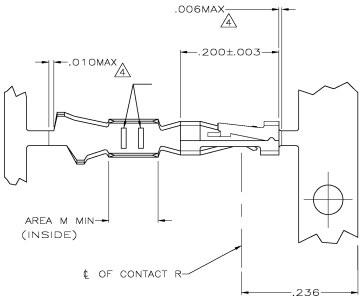



SECTION A–A
SCALE 20:1

1. .000100 MIN BRIGHT TIN–LEAD OVER .000050 MIN NICKEL ON ENTIRE CONTACT
2. .000050 MIN NICKEL ON ENTIRE CONTACT; .000015 MIN GOLD ON CONTACT AREA; .000050 MIN BRIGHT TIN–LEAD ON AREA M.
3. .000050 MIN NICKEL ON ENTIRE CONTACT; .000030 MIN GOLD ON CONTACT AREA; .000050 MIN BRIGHT TIN–LEAD ON AREA M.
4. LOOSE PIECE CUT–OFF DIMENSION.
5. OBSOLETE PART NUMBER.
6. .000015 MIN GOLD ON CONTACT AREA, .000050 MIN BRIGHT TIN ON AREA M, ALL OVER .000050–.000100 NICKEL ON ENTIRE CONTACT.
7. .000030 MIN GOLD ON CONTACT AREA, .000050 MIN BRIGHT TIN ON AREA M, ALL OVER .000050–.000100 NICKEL ON ENTIRE CONTACT.
8. .000100–.000200 BRIGHT TIN OVER .000050 MIN NICKEL ON ENTIRE CONTACT.

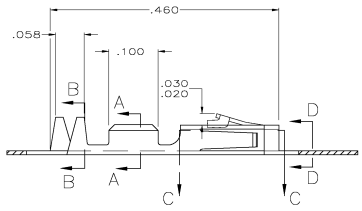



SECTION B–B
INSULATION RANGE .025–.060
SCALE 20:1



SECTION C–C
SCALE 20:1



SECTION D–D
SCALE 20:1

–	8	1–104480–7
LOOSE PIECE	7	1–104480–6
LOOSE PIECE	6	1–104480–5
LOOSE PIECE	6	1–104480–4
–	7	1–104480–3
–	6	1–104480–2
LOOSE PIECE		1–104480–1
LOOSE PIECE		1–104480–0
LOOSE PIECE	3	104480–9
LOOSE PIECE	2	104480–8
LOOSE PIECE	1	104480–7
–		104480–6
–		104480–5
–	3	104480–4
–	2	104480–3
–	1	104480–2
REMARKS	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES
TOLERANCES, UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL: PHOSPHOR BRONZE
FINISH: SEE TABLE

DR	5-10-88
M. OBERMAN	
DES	5-12-88
K. HELM	
APVD	5-12-88
R.FLICKER	
PRODUCT SPEC	
108-1472	
APPLICATION SPEC	
114-25038	
WEIGHT	
–	

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

TITLE: CONTACT, CRIMP SNAP-IN
AMPMODU SHORT POINT, 22-26 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-104480	–

CUSTOMER DRAWING | SCALE 10:1 | SHEET 1 OF 1 | REV R

AMP 4805 REV 31MAR2000

Downloaded from Elcodis.com electronic components distributor